

for the

SYNTHESIZED 2-METER FM TRANSCEIVER

Model HW-2036A

595-2086-02

HEATH COMPANY · BENTON HARBOR, MICHIGAN

3ER14LB 01838

HEATH COMPANY PHONE DIRECTORY

The following telephone numbers are direct lines to the departments listed:

Kit orders and delivery information (616) 982-3411
Credit(616) 982-3561
Replacement Parts
Technical Assistance Phone Numbers
8:00 A.M. to 12 P.M. and 1:00 P.M. to 4:30 P.M., EST, Weekdays Only
R.C. Audio, and Electronic Organs
Amateur Radio(616) 982-3296
Test Equipment, Weather Instruments and
Home Clocks
Television
Aircraft, Marine, Security, Scanners, Automotive,
Appliances and General Products (616) 982-3496
Computers



YOUR HEATHKIT 90 DAY LIMITED WARRANTY

If you are not satisfied with our service - warranty or otherwise - or with our products, write directly to our Director of Customer Services, Heath Company, Benton Harbor, Michigan 49022. He will make certain your problems receive immediate, personal attention

Our attorney, who happens to be quite a kitbuilder himself, insists that we describe our warranty using all the necessary legal phrases in order to comply with the new warranty regulations. Fine. Here they are:

For a period of ninety (90) days after purchase, Heath Company will replace or repair free of charge any parts that are defective either in materials or workmanship. You can obtain parts directly from Heath Company by writing us at the address below or by telephoning us at (616) 982-3571. And we'll pay shipping charges to get those parts to you — anywhere in the world.

We warrant that during the first ninety (90) days after purchase, our products, when correctly assembled, calibrated, adjusted and used in accordance with our printed instructions, will meet published specifications.

If a defective part or error in design has caused your Heathkit product to malfunction during the warranty period through no fault of yours, we will service it free upon proof of purchase and delivery at your expense to the Heath factory, any Heathkit Electronic Center (units of Schlumberger Products Corporation), or any of our authorized overseas distributors.

You will receive free consultation on any problem you might encounter in the assembly or use of your Heathkit product. Just drop us a line or give us a call. Sorry, we cannot accept collect calls.

Our warranty does not cover and we are not responsible for damage caused by the use of corrosive solder, defective tools, incorrect assembly, misuse, fire, or by unauthorized modifications to or uses of our products for purposes other than as advertised. Our warranty does not include reimbursement for customer assembly or set-up time.

This warranty covers only Heathkit products and is not extended to allied equipment or components used in conjunction with our products. We are not responsible for incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

HEATH COMPANY BENTON HARBOR, MI. 49022

Prices and specifications subject to change without notice.

Heathkit® Manual

for the

SYNTHESIZED 2-METER FM TRANSCEIVER

Model HW-2036A

595-2086-02



HEATH COMPANY
BENTON HARBOR, MICHIGAN 49022

Copyright © 1978 Heath Company All Rights Reserved Printed in the United States of America



TABLE OF CONTENTS

UNPACKING 3	Receiver Alignment
ASSEMBLY NOTES 4	Deviation Adjustment 124
CHASSIS ASSEMBLY	Tone Adjustments
Parts List 7	Micoder Adjustments 124
Step-by-Step Assembly	FINAL ASSEMBLY 125
VCO CIRCUIT BOARD	INSTALLATION
Parts List	Gimbal Bracket Installation 127
Step-by-Step-Assembly 28	Fixed Station Installation
Installation	Mobile Station Installation 129
	Antennas 134
RECEIVER CIRCUIT BOARD	
Parts List	OPERATION
Step-by-Step Assembly	Controls and Connections 135
Installation	Power Supply 136
CVAIRTHEOLOGIC CONCLUSE DO A DO	Aux (Auxiliary) Crystal Information 136
SYNTHESIZER CIRCUIT BOARD	Normal Operating Characteristics 137
Parts List	BLOAGE OF PERFECTION
Step-by-Step Assembly	IN CASE OF DIFFICULTY
Installation	Visual Tests
TRANSMITTER CIRCUIT BOARD	Precautions for Troubleshooting
Parts List 70	Checking Transistors and Diodes
Step-by-Step Assembly	Troubleshooting Charts 141
Installation 83	CDECIFIC ATIONS
	SPECIFICATIONS 143
POWER AMPLIFIER CIRCUIT BOARD	CIRCUIT DESCRIPTION 145
Parts List	Synthesizer 146
Step-by-Step Assembly 90	Receiver 148
Installation	Transmitter 148
MOROPHONE	Power Amplifier 149
MICROPHONE INSTALLATION 108	
Divinia i mnomo	CIRCUIT BOARD X-RAY VIEWS 150
INITIAL TESTS	
Initial Test Troubleshooting Chart 111	IDENTIFICATION CHARTS 153
ALIGNMENT	
Alignment Preparation 112	SCHEMATIC Fold-in
VCO Adjustment	Tolu-III
Transmitter Alignment 116	WARRANTY Inside front cover
10 MHz Oscillator Adjustment 117	
Power Amplifier Adjustment 118	CUSTOMER SERVICE Inside rear cover



UNPACKING

The Transceiver shipping carton contains a box marked "Packs 1—5 TOP." There is also a container which has the Micoder® kit or a regular microphone in it, depending on which kit you purchased. After you remove these boxes, the remaining parts in the shipping carton form the Main Pack, which are items too large to fit into the other parts packs and those items which you will use in the chassis assembly section.

- Set the box marked "Packs 1—5 TOP" aside until one of these packs is called for in an assembly section. DO NOT disturb any of these packs yet.
- () Set the Micoder kit or the regular microphone pack aside until it is called for.

Each assembly section of this Manual contains its own "Parts List" and "Step-by-Step Assembly" instructions. At the beginning of each "Parts List," you will be instructed which parts pack to remove from the box and open. You may also be directed to locate certain required parts from the Main Pack.


To avoid intermixing parts, do not remove or open any of these parts packs until you are directed to do so at the beginning of one of the "Parts Lists." Return any part that is packed in an individual envelope, with the part number on it, back in its envelope after you identify it until that part is called for in a step. Some envelopes have one transparent side so you can identify the parts inside without opening the envelope.





ASSEMBLY NOTES

TOOLS

You will need these tools to assemble your kit.

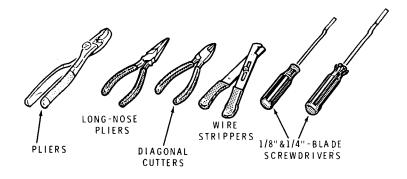

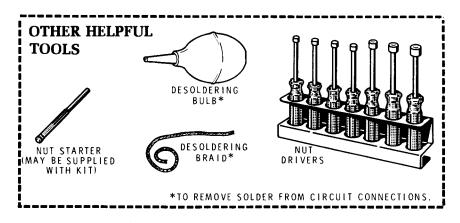

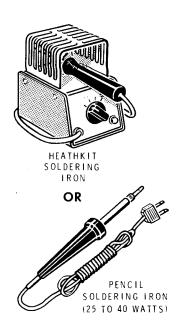

ASSEMBLY

- 1. Follow the instructions carefully and read the entire step before you perform the operation.
- 2. The illustrations in the Manual are called Pictorials and Details. Pictorials show the overall operation for a group of assembly steps; Details generally illustrate a single step. When you are directed to refer to a certain Pictorial "for the following steps," continue using that Pictorial until you are referred to another Pictorial for another group of steps.
- 3. Most kits use a separate "Illustration Booklet" that contains illustrations (Pictorials, Details, etc.) that are too large for the Assembly Manual. Keep the "Illustration Booklet" with the Assembly Manual. The illustrations in it are arranged in Pictorial number sequence.
- 4. Position all parts as shown in the Pictorials.
- 5. Solder a part or a group of parts only when you are instructed to do so.



- 6. Each circuit part in an electronic kit has its own component number (R2, C4, etc.). Use these numbers when you want to identify the same part in the various sections of the Manual. These numbers, which are especially useful if a part has to be replaced, appear:
 - In the Parts List,
 - At the beginning of each step where a component is installed,
 - In some illustrations,
 - In the Schematic,
 - In the section at the rear of the Manual.
- 7. When you are instructed to cut something to a particular length, use the scales (rulers) provided at the bottom of the Manual pages.

SAFETY WARNING: Avoid eye injury when you cut off excess lead lengths. Hold the leads so they cannot fly toward your eyes.

SOLDERING

Soldering is one of the most important operations you will perform while assembling your kit. A good solder connection will form an electrical connection between two parts, such as a component lead and a circuit board foil. A bad solder connection could prevent an otherwise well-assembled kit from operating properly.

It is easy to make a good solder connection if you follow a few simple rules:


- Use the right type of soldering iron. A 25 to 40-watt pencil soldering iron with a 1/8" or 3/16" chisel or pyramid tip works best.
- 2. Keep the soldering iron tip clean. Wipe it often on a wet sponge or cloth; then apply solder to the tip to give the entire tip a wet look. This process is called tinning, and it will protect the tip and enable you to make good connections. When solder tends to "ball" or does not stick to the tip, the tip needs to be cleaned and retinned.

"Federal Communications Commission requirements prescribe maximum RF radiation from transceivers operating above 30 MHz. This transceiver will meet these requirements when constructed in strict accordance with the instructions in this Manual, using only components and materials supplied with the kit or the exact equivalent thereof. You will be instructed to sign and affix a label to the transceiver certifying that you have constructed this transceiver in accordance with the above mentioned instructions. In order to meet legal requirements, be certain to follow the instructions exactly as they are stated in this Manual."





PARTS

Resistors will be called out by their resistance value in Ω (ohms), $k\Omega$ (kilohms), or $M\Omega$ (megohms). Certain types of resistors will have the value printed on the body, while others will be identified by a color code. The colors of the bands and the value will be given in the steps, therefore the following color code is given for information only.

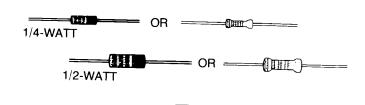







30 \times 100,000 = 3,000,000 Ω (or 3 M Ω) 3 M Ω = 3 MEGOHMS

RESISTOR	COLOR CODE		TOLERANCE Gold 5% Silver 10%
COLOR	1st DIGIT	2nd DIGIT	MULTIPLY BY
BLACK	0	0	
BROWN	<u>`</u>		1
RED	2		10
ORANGE	3	2 3	100
YELLOW	4	3	1,000
GREEN	5	5	10,000
BLUE	6		100,000
VIOLET	7	6	1,000,000
GRAY	8	7	10,000,000
WHITE	9	8	100,000,000
GOLD		99	1,000,000,000

Capacitors will be called out by their capacitance value in μ F (microfarads) or pF (picofarads) and type: ceramic, Mylar*, electrolytic, etc. Some capacitors may have their value printed in the following manner:

EXAMPLES:

SILVER

$$151K = 15 \times 10 = 150 \text{ pF}$$

 $759 = 75 \times 0.1 = 7.5 \text{ pF}$

NOTE: The letter "R" may be used at times to signify a decimal point; as in: 2R2 = 2.2 (pF or μ F).

First digit of capacitor's value: 1 ———————————————————————————————————
Second digit of capacitor's value: 5
Multiplier: Multiply the
To find the tolerance of ———————————————————————————————————

MULTIPLI	E R	TOLERANC	E OF CAPACI	TOR
FOR THE NUMBER:	MULTIPLY BY:	10pF OR LESS	LETTER	OVER 10pF
0	1	±0.1pF	В	
1	10	±0.25pF	С	
2	100	±0.5pF	D	
3	1000	±1.0pF	F	±1%
4	10,000	±2.0pF	G	± 2 %
5	100,000		Н	±3%
			J	±5%
8	0.01		К	±10%
9	0.1		M	±20%

^{*}DuPont Registered Trademark

CHASSIS ASSEMBLY

PARTS LIST

- () Locate and remove all the parts from the main pack (parts left in the shipping carton). Be sure you have removed the packs from the carton as directed in the "Unpacking" section.
- () Unpack these parts and check each part against the following list. The key numbers correspond to the numbers on the "Chassis Parts Pictorial" (Illustration Booklet, Page 1). Set aside any remaining parts not called for in this Parts List. They will be called for later.

To order a replacement part, always include the PART NUMBER. Use the Parts Order Form furnished with this kit. If one is not available, see "Replacement Parts" inside the rear cover of this Manual. For price information, refer to the separate "Heath Parts Price List."

KEY	HEATH	QTY. DESCRIPTION	CIRCUIT
No.	Part No.		Comp. No.
			

RESISTORS — CAPACITORS

NOTE: The following resistors have a tolerance of 5% unless otherwise noted. 5% is indicated by a fourth color band of gold; 10% is indicated by a silver fourth band.

A1	6-223-12	γ 1	22 kΩ, 1/4-watt (red-red-	Test
			orange)	purposes
A 2	6-510	V1.	51 Ω, 1/2-watt (green-	Test
		1	brown-black)	purposes
A 2	6-680	⊕ 1	68 Ω, 1/2-watt (blue-gray-	R3
			black)	
АЗ	1-20-2	/2	100 Ω, 2-watt, 10% (brown-	Test
			black-brown)	purposes
A4	21-140	¥ 2	.001 μF ceramic	Test
		,		purposes
A 5	25-212	γ1	22 μF tantalum	C1
		V	•	

HEATH Part No.	QTY	DESCRIPTION	CIRCUIT Comp. No.
NTROLS	_ s	WITCHES	
10-227 19-179 61-16 63-1289 100-1671	X1 X1 X2 X1	2000 (2k) Ω control 10 k Ω control with switch Toggle switch Rotary switch Lever switch set consists of:	R2 R1/SW1 SW6 SW2, SW7
63-1229	[,] 3	Lever switch	SW3, SW4, SW5
255-710 440-22	`1 }2	Decimal spacer End cap	
	10-227 19-179 61-16 63-1289 100-1671 63-1229 255-710	Part No. NTROLS — S 10-227	Part No. NTROLS — SWITCHES 10-227



these

KEY HEATH No. Part No.	QTY. DESCRIPTION	CIRCUIT Comp. No.	KEY HEATH No. Part No.	QTY. DESCRIPTION	CIRCUIT
		Comp. No.	NO. FAIT NO.		Comp. No.

METAL PARTS

C1	200-1302	1	Chassis
C2	203-1650-3	71	Front panel
СЗ	210-58	71	Bezel
C4	204-1866-4	×1	Gimbal plate
C5	90-577-5	71	Cabinet
C6	90-1213-1	<u>}1</u>	Bottom cover
C7	204-2003	√2	Meter bracket
C8	205-1609-2	/1	Front subpanel
C9	204-1865-4	×1	Gimbal bracket
C10	215-67	x 2	Heat sink

HARDWARE

NOTE: Hardware packets are marked to show the size of the hardware they contain (HDW#4, HDW#6, etc.). You may have to open more than one packet in this pack to locate all of the hardware of any one (#6, for example) size.

#2 Hardware

D1	250-421	74	2-56 × 3/8" screw
D2	^{>} 266-868	χ2	2-56 × 2-1/4" stud
D3	252-51	λ8	2-56 nut
D4	254-26	√8	#2 lockwasher

#4 Hardware

E1	250-428	72	$4-40 \times 1/4''$ flat
			head screw
E2	252-2	1/2	Large 4-40 nut
E3	254-9	1 2	#4 lockwasher

#6 Hardware

		s1 =	
F1	250-138	√ 9	6-32 × 3/16" screw
F2	250-56	1/5	6-32 × 1/4" screw
F3	250-432	1/8	6-32 × 5/16" truss head
			screw
F4	250-237	Χ3	#6 × 3/8" sheet
			metal screw
F5 -	250-1242	711	$6-32 \times 1/2''$ flat head
			screw
F6	250-162	4	6-32 × 1/2" screw
F7	250-1158	∱ 3	6-32 × 3/4" stud
F8	252-3	<u>}~17</u>	6-32 nut
F9	254-6	76	#6 external tooth lockwasher
F10	254-1	M5	#6 lockwasher
F11	253-89	X1	#6 "D" washer
F12	255-60	†2	6-32 × 1-1/8" spacer
F13	259-1	%3	#6 solder lug
F14	253-27	1/2	#6 flat washer

Hardware (cont'd.)

#10 Hardware

G1	250-83	× 4	#10 \times 1/2" sheet meta
			screw
G2	250-1147	\sim 2	#10 thumbscrew
G3	252-49	× 2	#10 thumbnut
G4	253-19	× 2	#10 flat washer

Other Hardware

H1	253-15	× 2	Fiber flat washer
H2	259-24	\times_4	#8 solder lug
НЗ	252-7	X2	Control nut
H4	252-39	12	1/4" nut
H5	253-10	X2	Control flat washer
H6	253-91	X2	1" cork washer
H7	254-5	\∕2	Control lockwasher
H8	205-778	χ1	1" steel blade

CONNECTORS

J1	432-790	2 V(3)	Plastic sleeve
J2	259-22	x1	Spade lug
J3	432-72	₹ 2	Male connector (large)
J4	432-73	₹7	Female connector
J5	432-120	¹ 75	PCB connector (9 extra)
J6	432-121	¥4	Small PCB pin
J7	432-137	%1	Push-on connector
J8	432-183	V ₁	9-pin plug housing
J9	432-720	1	Female connector housing
J10	432-723	/2	Male connector housing
J11	432-854	% 9	Male connector (small)
J12	438-4	1	Phono plug
J13	438-46	V1	Phono plug, 3/8" tip
J14	490-112	X1	Extractor tool

OTHER ELECTRONIC PARTS

	134-987	J ₁	Wire harness	
	401-181	√1	Speaker	S1
K1	407-167	√1	Meter	M1
K2	412-611	1	LED (red)	LED1
K2	412-617	1	LED (amber)	LED2
КЗ	412-82	√ 1	Lamp assembly	PL1
K4	423-10	√ 1	Fuseholder assembly	
K5	475-10	17	1.07 μ H ferrite bead	
K6	56-26	*1	1N191 diode (brown-	Test
			white-brown)	purposes

Manual (See Page 1 for

Package of desoldering

part number.)

braid



*DuPont registered trademark


(with hole in center)

KEY HEATH QTY. DESCRIPTION CIRCUIT KEY HEATH QTY. DESCRIPTION **CIRCUIT** No. Part No. Comp. No. Part No. Comp. No. **WIRE — SLEEVING** Miscellaneous (cont'd.) 340-2 2' Bare wire 75-727 Top insulator paper 343-12 5′ Shielded cable L2 207-4 Cable clamp 344-15 10' Large black stranded wire L3 260-16 Alligator clip 344-16 Large red stranded wire 10' L4 260-89 √2 LED grommet Small black stranded wire 344-90 3′ L5 260-90 LED retainer 12 344-91 1-1/2' Brown stranded wire L6 261-29 X 8 Foot 344-92 3′ Small red stranded wire L7 354-5 Cable tie / 1 344-94 1-1/2' Yellow stranded wire L8 431-62 1 3-lug terminal strip 344-98 2-1/2' Gray stranded wire L9 462-291 /2 Large knob 346-1 Small sleeving 462-952 L10 Small knob 346-20 Large (heat shrinkable) 352-13 Silicone grease pod L11 sleeving 490-5 **x** 1 L12 Nut starter 346-21 Teflon* sleeving L13 431-49 χ 1 11-lug terminal strip Test 346-35 Medium (heat shrinkable) purposes sleeving Solder Magnet wire PRINTED MATERIAL **MISCELLANEOUS** 391-34 4 **M**1 Blue and white label Lħ. 73-3 Rubber grommet M2 390-1302 1 FCC label 73-39 Foam tape 597-260 Á Parts Order Form 75-193 Bottom insulator paper

490-185



STEP-BY-STEP ASSEMBLY

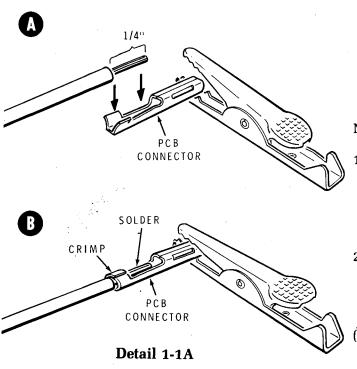

HARNESS PREPARATION

Refer to Pictorial 1-1 (Illustration Booklet, Page 3) for the following steps.

- Locate and unfold the wire harness. Then bend the breakouts (marked BO 1 through BO 12 on the Pictorial) of the wire harness as shown. BO 1 has the two large orange wires and one large red wire.
- Refer to Detail 1-1A and install a PCB connector (#432-120) on the white-brown wire coming from BO 1 (breakout 1) of the wire harness. Use the alligator clip to hold the connector while you solder it. CAUTION: Do not allow solder to flow into the open end of the connector.

NOTES:


- The wire harness contains several shielded cables. These cables have different colored bands on each end. In the following steps, shielded cables will be called out by the band color.
- 2. Always use a 1/2" length of small sleeving on the shield lead of a cable before you connect it. Refer to the inset on the Pictorial for identification of the shield lead.
 - In the same way as before, install a PCB connector on each of the following wires at BO 1:


3 white-orange

red cable inner lead

red cable shield lead (and 1/2'' of sleeving).


- Refer to Detail 1-1B and install a female connector (#432-73) on the red wire at BO 1. Then hold a plastic sleeve so the raised areas are positioned as shown and push the connector on the red wire into the sleeve until it locks.
- (> In the same way, install female connectors and plastic sleeves on the two orange wires at BO 1.
- Cut six 5/8" lengths of medium (heat shrinkable) sleeving.



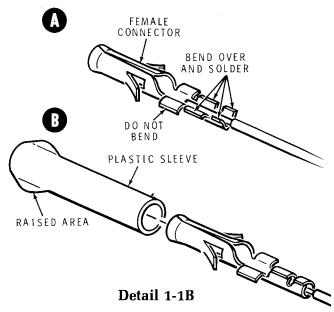


NOTES:

- To install the medium sleeving on a PCB connector, push the sleeving onto the connector until the end of the sleeving is flush with the end of the connector. Then use the heat of a flame from a match, lighter, or candle to shrink the sleeving around the connector.
- You may wish to install all of the connectors, in the following steps, before you install the sleeving.
- Refer to Detail 1-1C and install a 5/8" length of medium sleeving on each PCB connector you installed on the wires coming from BO 1 of the wire harness.

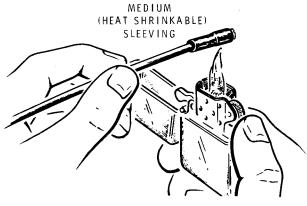


Detail 1-1C


NOTE: When a step directs you to install a ferrite bead and a PCB connector on a wire, as in the following step, first remove an additional 1/4" (total 1/2") of insulation from the wire. Then slide a ferrite bead onto the bare wire end and install the PCB connector as before. See Detail 1-1D.

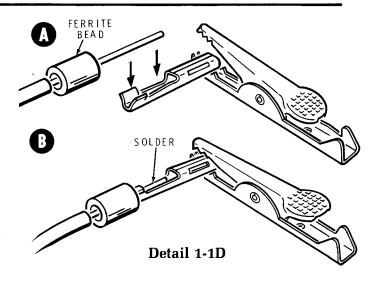

- Locate the wires coming from BO 2 of the wire harness. Then install a ferrite bead and a PCB connector on the orange cable inner lead.
- Cut a 2-1/2" length of small red stranded wire. Remove 1/4" of insulation from one end of the wire and 3/4" of insulation from the other end. Then twist together the strands at each end and apply a small amount of solder to the wire ends to hold the fine strands together.
- (X) Form a small hook in the 1/4" end of the prepared red wire and in the red wire coming from BO 2 of the wire harness. Then connect the hooks together and solder the connection. Cut a 3/4" length of small sleeving and slide it over the connection.
- (National install only a PCB connector (no ferrite bead) on the white-black wire.
- Cut a 1-1/4" length of small black stranded wire. Remove 1/4" of insulation from each end of the wire and apply a small amount of solder to the ends as you did before.
- (X) Refer to inset drawing #2 on the Pictorial and install a PCB connector on one end of the prepared black wire and the orange cable shield lead as shown. Be sure to use 1/2" of small sleeving on the shield lead before you install the connector.
- (V) Cut 5/8" lengths of medium (heat shrinkable) sleeving.
- Install a 5/8" length of medium sleeving on each PCB connector you installed on the wires coming from BO 2.



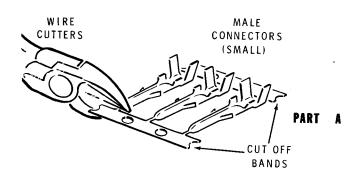

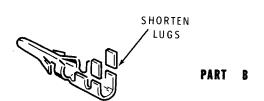

Detail 1-1E

- Refer to Part A of Detail 1-1E and cut the two supporting bands from the strip of nine male connectors (small). Then refer to Part B and shorten the indicated lugs on each connector.
- Locate the wires coming from BO 3 of the wire harness. Then refer to inset drawing #3 on the Pictorial and install a small male connector on each of the nine wires at this breakout.
- Locate the wires coming from BO 4 of the wire harness. Then install ferrite beads and PCB connectors on these wires as follows:

white-brown white-orange

white-red white-black

Install only PCB connectors on the green cable inner and shield leads. Be sure to use 1/2" of small sleeving on the shield lead before you install the connector.

- () Cut six 5/8" lengths of medium (heat shrink-able) sleeving.
- () Install a 5/8" length of sleeving on each PCB connector you installed on the wires coming from BO 4.

NOTE: No connectors will be installed on the wires at BO 5, 6, 7, or 8.

Locate the wires coming from BO 9 of the wire harness. Then install a ferrite bead and a PCB connector on the orange cable inner lead.

Install only PCB connectors on the following wires coming from BO 9 (be sure to use 1/2" of small sleeving on each shield lead).

red blue cable inner lead yellow blue cable shield lead brown white-red white-violet orange cable shield lead

Cut nine 5/8" lengths of medium (heat shrinkable) sleeving.

(\(\) Install a 5/8" length of sleeving on each PCB connector you installed on the wires coming from BO 9.

Locate the wires coming from BO 10 of the wire harness. Then install only PCB connectors on these wires, as follows:

white-orange red
blue white-brown
orange white-blue

Cut six 5/8" lengths of medium (heat shrinkable) sleeving.

Install a 5/8" length of sleeving on each PCB connector you installed on the wires coming from BO 10.

Locate the wires coming from BO 11 of the wire harness. Then install only PCB connectors on the green and violet wires.

Install ferrite beads and PCB connectors on the wires coming from BO 11 as follows:

vellow red

orange brown

- Cut six 5/8" lengths of medium (heat shrinkable) sleeving.
- (-) Install a 5/8" length of sleeving on each PCB connector you installed on the wires coming from BO 11.
- () Locate the wires coming from BO 12 of the wire harness. Then install only PCB connectors on these wires, as follows:

white

gray

black

white-black


- (\) Cut four 5/8" lengths of medium (heat shrinkable) sleeving.
- Install a 5/8" length of sleeving on each PCB connector you installed on the wires coming from BO 12.

Refer to Pictorial 1-2 for the following steps.

(\) Position the 9-pin plug housing near BO 3 of the harness so the V-ridges inside the housing are at the top as shown. (The wires from BO 3 have the small male connectors soldered to them.)

NOTE: In the following steps, push each small male connector (on the wires coming from BO 3) into the indicated hole of the 9-pin plug housing until the connector snaps in place. Be careful to install each connector in the proper hole as shown in Pictorial 1-2. These connectors are very difficult to remove once they have been installed. Disregard any numbers stamped in the housing.

- () White-red to hole 7.
- (\times) White-orange to hole 8.
- (\times) White to hole 9.
- (\) Red to hole 4.
- (λ_{-}) White-yellow to hole 5.
- (+) White-black to hole 6.
- (White-brown to hole 1.

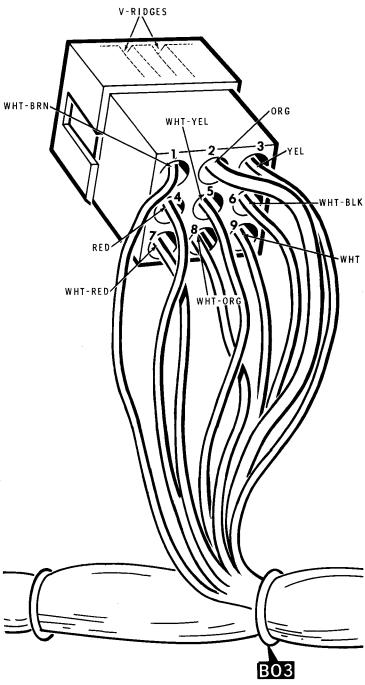


PICTORIAL 1-2


- () Orange to hole 2.
- (Yellow to hole 3.

Set the wire harness aside until it is called for.



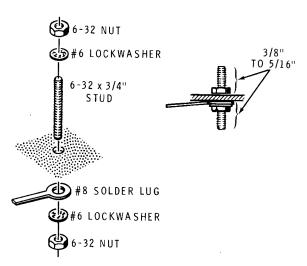

Detail 1-3A

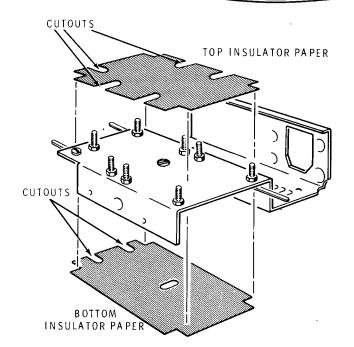

Detail 1-3B

CHASSIS PARTS MOUNTING

Refer to Pictorial 1-3 (Illustration Booklet, Page 4) for the following steps.

- (\nearrow) Position the chassis as shown.
- Locate three #8 solder lugs. Then cut the slender part of each lug in half as shown.


NOTE: Use the plastic nut starter (supplied with this kit) to hold and start 4-40 and 6-32 nuts on screws.

Mount a #8 solder lug at AA with a 6-32 × 1/2" screw, a #6 lockwasher, and a 6-32 nut. Make sure the screw is on top of the chassis. Position the solder lug as shown in the Pictorial.

NOTE: In the next three steps, be sure to install the lockwashers as shown in the Pictorial.


- Install a 6-32 × 1/2" flat head screw at AB with a #6 external tooth lockwasher and a 6-32 nut. Make sure the nut is on top of the chassis.
- (\(\) In the same way, install 6-32 \times 1/2" flat head screws at AD, AE, AG, and AH. Make sure the nuts are on top of the chassis.
- Install a $6-32 \times 1/2''$ flat head screw at AF with a #6 external tooth lockwasher and a 6-32 nut. Make sure the screw head is on top of the chassis.

- Refer to Detail 1-3A and install a 6-32 × 3/4" stud at AC with a #8 solder lug, two #6 lockwashers, and two 6-32 nuts. Tighten the hardware so the stud is centered as shown. Position the solder lug as shown in the Pictorial.
- In the same way, install $6-32 \times 3/4$ " studs at AJ and AK. Use a #8 solder lug at AK only. Make sure the studs are centered properly and position the solder lug at AK as shown in the Pictorial.
- Locate the piece of top insulator paper (the one without the center hole).
- Remove the protective backing paper from the top insulator paper. Then refer to Detail 1-3B, line up the ends of the insulator paper with the edges of the chassis, and press the paper in place on the top of the chassis. CAUTION: Do not let the insulator paper touch the chassis before you have it in position. The paper is very difficult to remove once it adheres to any surface.

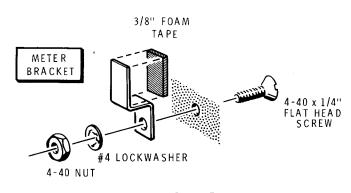


Detail 1-3C

- Turn the chassis over and, in the same way as before, install the bottom insulator paper on the bottom of the chassis as shown.
- (`) Reposition the chassis as shown in the Pictorial.
- (/) Locate the foam tape and two meter brackets.
- (-) 6at two 3/8" lengths of foam tape.
- Refer to Detail T-SC and remove the backing paper from a 3/8" length of foam tape. Then press the tape in place on a meter bracket as shown.
- (') In the same way, install a 3/8" length of foam tape on the remaining meter bracket.
- () Install a meter bracket at AU with a 4-40 × 1/4" flat head screw, a #4 lockwasher, and a large 4-40 nut. Be sure to position the bracket as shown. Then tighten the hardware only finger tight.
- () In the same way, install a meter bracket at AW.
- Locate the front subpanel and the amber LED.

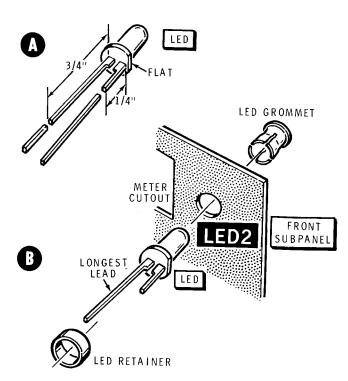


Detail 1-3D

- (/) Refer to Detail 1-3D, Part A, and cut the lead nearest the flat on the body of the amber LED to 1/4". Cut the other LED lead to 3/4".
- LED2: Refer to Detail 1-3D, Part B, and mount the amber LED in the front subpanel as follows:
 - 1. First insert the LED grommet into hole LED2 from the front of the panel.
 - 2. Push the LED into the grommet until the lip around the LED body slides into place in the grommet. Be sure the longest lead is closest to the meter cutout. NOTE: It may be helpful to slide a slender object into the grommet from the front of the panel and pry outward on the grommet lips (back of panel) just enough to permit the LED lip to slide into the grommet.
 - 3. Place the LED retainer over the LED leads and push it onto the end of the LED grommet which protrudes from the back of the panel. This locks the LED into place.





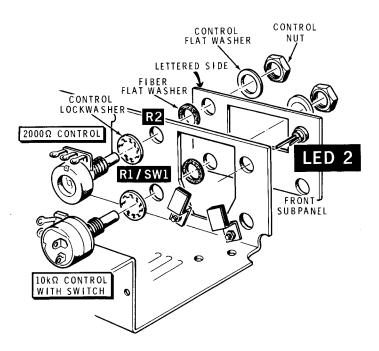


Detail 1-3E

- (X) R1/SW1, R2: Refer to Detail 1-3E and mount the front subpanel as follows:
 - 1. Place a control lockwasher on the shaft of a 10 $k\Omega$ control with switch.
 - 2. Insert the shaft of the control into hole R1/SW1 in the chassis. Then place a fiber flat washer on the shaft of the control.
 - 3. In a similar way, place a control lockwasher on the shaft of a 2000 Ω (2k Ω) control. Then insert the shaft of the control into hole R2 in the chassis and place a fiber flat washer on the shaft of this control.
 - 4. Place the front subpanel against the front of the chassis with the lettered side as shown. Be sure the shafts of the two controls and the leads from LED2 enter the indicated holes. Then secure the two controls with control flat washers and control nuts. Be sure the control lugs are positioned as shown.

- Carefully unpack the meter and remove any wire that is connected between the meter lugs.
- Refer to Detail 1-3F and bend the meter lugs up as shown.

NOTE: When you perform the next step, bend the meter brackets as necessary to firmly hold the meter.

- () M1: Install the meter at M1 as shown in Detail 1-3F as follows:
 - 1. Make sure the meter brackets are positioned as shown.
 - 2. Insert the meter in the front of the chassis as shown. Make sure the meter is seated in place.
 - Hold the meter in place and position the meter brackets behind the meter as necessary to hold it.
 - 4. Tighten the hardware of each meter bracket. Use a small screwdriver.

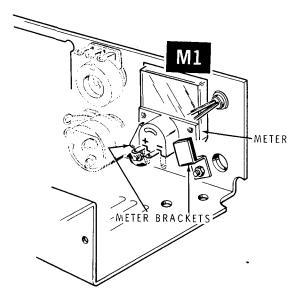


Detail 1-3F


(7) Refer to Detail 1-3G and install a 3-lug terminal strip at AT with a 6-32 × 1/4" screw, two #6 lockwashers, and a 6-32 nut. Position the terminal strip as shown.

NOTE: Do not overtighten the nut in the following step or you could damage the switch.

() SW6: Refer to Detail 1-3H and mount the toggle switch at SW6 as shown. Use the lockwasher and one of the nuts that is supplied with the switch. Save the remaining nut that was supplied with the switch for use later when you mount the front panel.

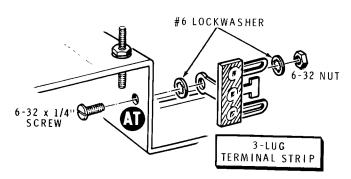


Detail 1-3G

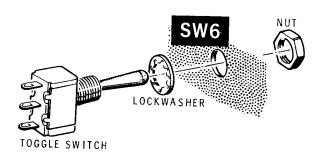


Detail 1-3H

- SW7: Refer to Detail 1-3J and mount a rotary switch in hole SW7 in the chassis. Be sure to match the flat on the bushing of the switch with the flat in hole SW7. Then secure the switch with a 1/4" nut.
- SW2: In a similar way, mount another rotary switch at SW2 with a 1/4" nut.
- Locate a rubber grommet and cut through one side of it. Then install the grommet in slot AR so the cut side is toward the outside of the chassis as shown in the Pictorial.

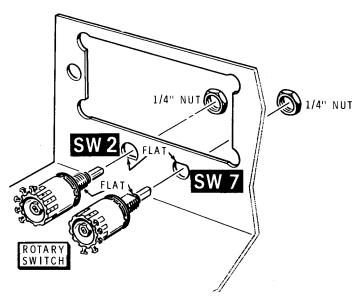

Detail 1-3]

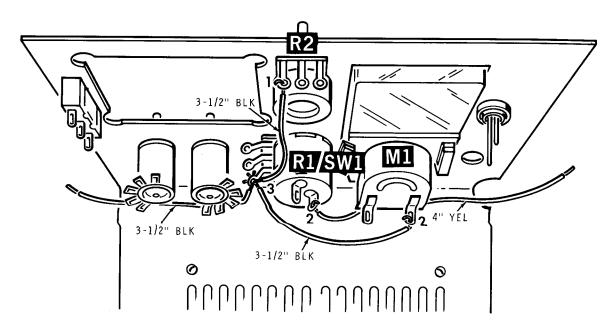

PICTORIAL1-4

CHASSIS PREWIRING

Refer to Pictorial 1-4 for the following steps.

NOTE: When you wire this kit, you will be instructed to prepare lengths of wire ahead of time, as in the following step. To prepare a wire, cut it to the indicated length and remove 1/4" of insulation from each end. Twist together the strands at each end and apply a small amount of solder to the wire ends to hold the fine strands together. The wires are listed in the order in which you will use them.

Prepare the following stranded wires:

QTY	LENGTH	COLOR
3	3-1/2"	small black
1	4"	yellow

NOTE: In the following steps, (NS) means not to solder because other wires will be added later. "S-" with a number, such as (S-3), means to solder the connection. The number following the "S" tells how many wires are at the connection.

- Connect a 3-1/2" small black stranded wire from control R2 lug 1 (S-1) to control R1 lug 3 (NS).
- Connect one end of another 3-1/2" small black stranded wire to control R1 lug 3 (NS). Route this wire under the rotary switches as shown. The other end will be connected later.
- Connect another 3-1/2" small black stranded wire from control R1 lug 3 (S-3) to meter M1 lug 2 (S-1).
- Connect a 4" yellow stranded wire to switch SW1 lug 2 (NS). Route this wire as shown; the other end will be connected later.





HARNESS WIRING

Refer to Pictorial 1-5 (Illustration Booklet, Page 4) for the following steps.

() Locate the harness and position it as shown.

NOTES:

- 1. You may find it helpful to remove the switches from the chassis while you wire them in the following steps.
- 2. Disregard any numbers stamped into the switch lugs.

Connect some of the wires coming from BO 5 as follows:

() White-orange wire to SW2 lug 1 (S-1).

(\backslash) White-red wire to SW2 lug 2 (S-1).

(White-brown wire to SW2 lug 3 (S-1).

NOTE: SW2 lug 4 will not be used.

White-black wire to SW2 lug 5 (S-1).

Black wire to SW7 lug 5 (S-1).

() Brown wire to SW7 lug 4 (S-1).

() Red wire to SW7 lug 3 (S-1).

Orange wire to SW7 lug 2 (S-1).

(Yellow wire to SW7 lug 1 (S-1).

The white-yellow wire will be connected later.

Connect the wires coming from BO 6 as follows:

(X) White-violet wire to control R1 lug 2 (S-1).

(\downarrow) Violet wire to control R1 lug 1 (S-1).

(x) Orange wire to switch SW1 lug 2 (S-2).


($\frac{1}{3}$) Red wire to switch SW1 lug 1 (S-1).

(\checkmark) White-blue wire to control R2 lug 2 (S-1).

(//) Blue wire to control R2 lug 3 (S-1).

() Connect the green wire coming from BO 7 to meter M1 lug 1 (S-1).



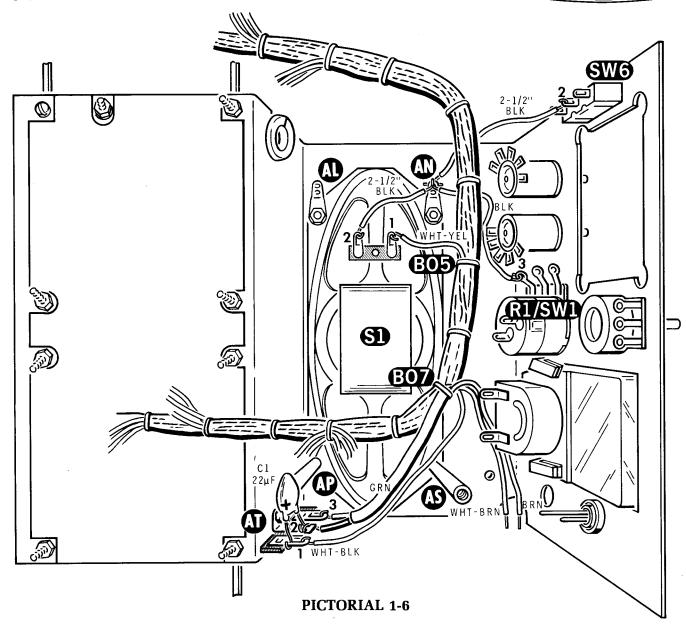


Refer to Pictorial 1-6 for the following steps.

NOTE: When you mount the speaker in the following step, pull the harness up out of the way and be sure no wires are pinched between the speaker and the chassis.

- KI
- S1: Refer to Detail 1-6A and mount the speaker as follows:
- Place the speaker on the chassis so the speaker terminal strip is positioned as shown. Then line up the four mounting holes in the speaker with the holes in the chassis.
- Mount the speaker at AL and AN with 6-32 × 1/2" flat head screws, #6 solder lugs, and 6-32 nuts. Position the solder lugs as shown and tighten the hardware only finger tight.
- 3. Mount the speaker at AP and AS with $6-32 \times 1/2''$ flat head screws, #6 flat washers, #6 lockwashers, and $6-32 \times 1-1/8''$ spacers. Tighten the hardware only finger tight.
- Push the speaker as far forward (toward the controls) as possible. Then tighten the four 6-32 × 1/2" flat head screws that secure the speaker to the chassis.



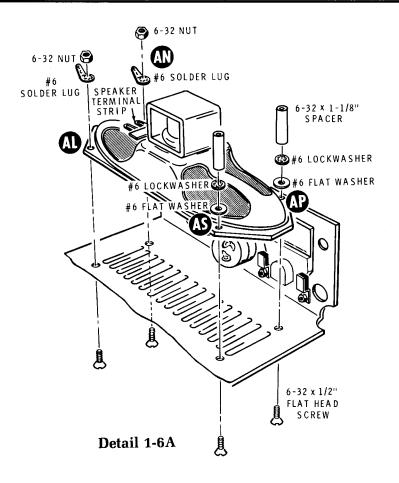

- Connect the free end of the black wire coming from control R1 lug 3 to solder lug AN (NS).
- () Connect the white-yellow wire coming from BO 5 of the wire harness to speaker S1 lug 1 (S-1).
- () Prepare two 2-1/2" lengths of small black stranded wire.
- () Connect a 2-1/2" small black stranded wire from switch SW6 lug 2 (S-1) to solder lug AN (NS).
- () Connect another 2-1/2" small black stranded wire from speaker S1 lug 2 (S-1) to solder lug AN (NS).

Connect some of the remaining wires coming from BO 7 of the wire harness as follows:

() Green cable inner lead to terminal strip AT lug 3 (NS).

- Green cable shield lead to terminal strip AT lug 2 (NS). Be sure to use 1/2" of small sleeving on this lead.
- (/) White-black wire to terminal strip AT lug 1 (NS).
- Route the brown and white-brown wires as shown. They will be connected later.

NOTE: Skip the next step if you intend to use the Heathkit Micoder with your transceiver.


C1: Connect the positive (+) or dot marked lead of a 22 μ F tantalum capacitor to terminal strip AT lug 1 (NS). Connect the other capacitor lead to lug 2 (NS).


Push the wire harness back down toward the chassis.

Temporarily set the chassis assembly aside.





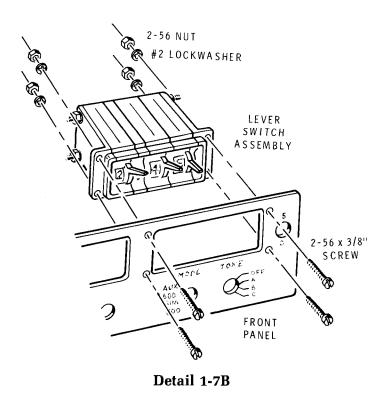

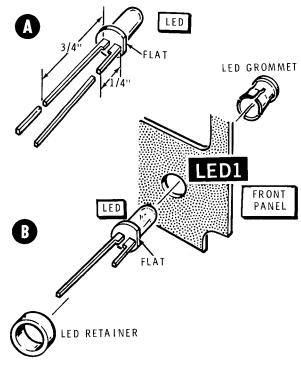

Detail 1-7C

FRONT PANEL ASSEMBLY

Refer to Pictorial 1-7 (Illustration Booklet, Page 5) for the following steps.

- Locate the lever switch set, two $2-56 \times 2-1/4''$ studs, four #2 lockwashers, and four 2-56 nuts.
- Refer to Detail 1-7A (in the Illustration Booklet) and assemble the lever switch set with the 2-56 studs, #2 lockwashers, and 2-56 nuts as shown. Be sure to position each part as shown. Do not overtighten the nuts. Check the decimal spacer to make sure it is in the correct position.
- Locate the front panel, four $2-56 \times 3/8''$ screws, four #2 lockwashers, and four 2-56 nuts.
- SW3, SW4, SW5: Refer to Detail 1-7B and mount the lever switch assembly on the front panel with 2-56 × 3/8" screws, #2 lockwashers, and 2-56 nuts. Be sure to position the switch assembly as shown. Do not overtighten the nuts.

- Refer to Detail 1-7C, Part A, and cut the lead nearest the flat on the body of the red LED to 1/4". Cut the other LED to 3/4".
- () LED1: Refer to Detail 1-7C, Part B, and mount the red LED in the front panel as follows:
 - 1. First, insert the LED grommet into hole LED1 from the front of the panel.
 - 2. Push the LED into the grommet until the lip around the LED body slides into place in the grommet. Be sure the longest lead is positioned as shown in the Pictorial. NOTE: It may be helpful to slide a slender object into the grommet from the front of the panel and pry outward on the grommet lips (back of panel) just enough to permit the LED lip to slide into the grommet.
 - 3. Place the LED retainer over the LED leads and push it onto the end of the LED grommet which protrudes from the back of the panel. This locks the LED into place.



() Prepare the following stranded wires:

QTY.	LENGTH	COLOR
3	2-3/8"	small brown
3	2-3/8"	small red
3	2-3/8"	small yellow
3	2-3/8"	small gray

Install PCB connectors on one end of each of the twelve wires you just prepared.

(\) Cut twelve 5/8" lengths of medium (heat shrinkable) sleeving.

Install a 5/8" length of sleeving on each of the PCB connectors you just installed on the twelve wires.

Again, refer to Pictorial 1-7 for the following steps.

NOTES:

 In the following steps, you will connect the twelve wires you just prepared to the lever switch assembly. Ignore any numbers that may be printed on the lever switch lugs.

2. It is only necessary to solder one side of each lever switch lug.

() Position the front panel assembly as shown.

(/) Connect a 2-3/8" brown wire to switch SW5 lug 4 (S-1).

($\frac{1}{2}$) Connect a 2-3/8" red wire to switch SW5 lug 3 (S-1).

() Connect a 2-3/8" yellow wire to switch SW5 lug 2 (S-1).

(() Connect a 2-3/8" gray wire to switch SW5 lug 1 (S-1).

() Connect a 2-3/8" brown wire to switch SW4 lug 4 (S-1).

Connect a 2-3/8" red wire to switch SW4 lug 3 (S-1).

Connect a 2-3/8" yellow wire to switch SW4 lug 2 (S-1).

Connect a 2-3/8" gray wire to switch SW4 lug 1 (S-1).

(\bigwedge) Connect a 2-3/8" brown wire to switch SW3 lug 4 (S-1).

Connect a 2-3/8" red wire to switch SW3 lug 3 (S-1).


Connect a 2-3/8" yellow wire to switch SW3 lug 2 (S-1).


(Connect a 2-3/8" gray wire to switch SW3 lug 1 (S-1).

() Cut a 3" length of small black stranded wire. Remove 1/4" of insulation from one end of the wire and 1-1/2" from the other end. Then prepare the wire ends as before.

NOTE: When a wire passes through a connection and goes to another point, it will be counted as two wires in the solder instructions (S-2), one entering and one leaving the connection.

Connect the 1-1/2" stripped end of the 3" small black stranded wire through switch SW5 lug 6 (S-2) and through switch SW4 lug 6 (S-2) to switch SW3 lug 6 (S-1). Cut off any excess bare wire end. The other end of this wire will be connected later.



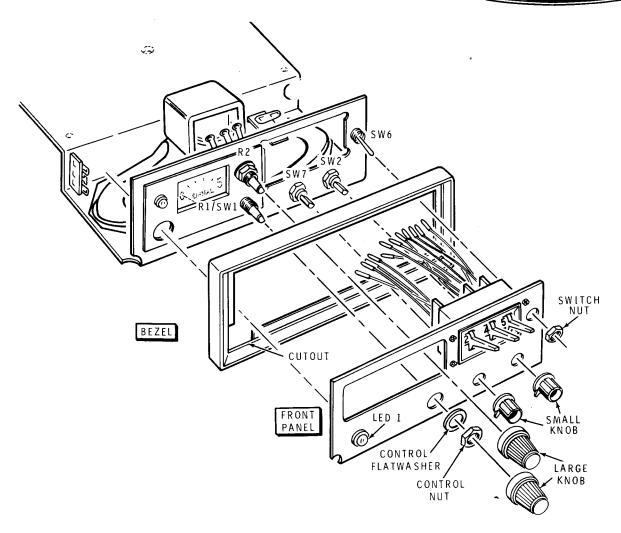

Detail 1-8A

FRONT PANEL INSTALLATION

Refer to Pictorial 1-8 (Illustration Booklet, Page 5) for the following steps.


Position the chassis in front of you. Then remove the control nut and control flat washer from control R1/SW1.


Locate the bezel and the nut you saved when you installed the toggle switch.

NOTE: When you perform the following step, position the harness under the lever switch assembly.

(*) Refer to Detail 1-8A and mount the bezel and front panel assembly on the chassis by reinstalling the control flat washer and control nut on control R1/SW1, and installing the switch nut on switch SW6. Be sure the leads from LED1 enter the indicated hole in the chassis. Also be sure to position the cutout in the bezel as shown. Do not overtighten the switch nut.

Install a large knob on the shaft of R1/SW1. Line up the flat in the knob with the flat on the shaft; then push the knob onto the shaft as far as it will go.





- Connect the free end of the black wire coming from SW5 lug 6 to solder lug AN (S-4).
- () Push the wire harness into grommet AR between BO 4 and BO 5.
- Push the end of a cable tie through a hole in solder lug AL. Then secure the harness as shown. Cut off any excess cable tie.
- (**) Bend LED1 lug 2 and LED2 lug 2 so they touch as shown in the Pictorial.

NOTE: In the next three steps, wrap the bare wire end around the LED leads and solder it.


- Connect the white-brown wire coming from BO 7 of the wire harness to LED1 lead 1 (S-1).
- Connect the yellow wire coming from R1/SW1 to LED1 lead 2 and LED2 lead 2 (NS).
- () Connect the brown wire coming from BO 7 of the wire harness to LED2 lead 1 (S-1).

Detail 1-8B

- Locate the lamp assembly. Then cut the leads to 2", as shown in Detail 1-8B, and remove 1/4" of insulation from the end of each lamp lead.
- Slide 1/2" of medium (heat shrinkable) sleeving on one lamp lead. Then bend a small hook in the lead.
- R3: Locate a 68 Ω , 1/2-watt (blue-gray-black) resistor. Then cut each resistor lead to 1/4".
- Bend a small hook in one of the resistor leads.
 Then refer to Detail 1-8B and connect the hooks in the lamp lead and resistor lead together and solder them.
- Slide the sleeving on the lamp lead down over the resistor junction. Then use a flame to shrink the sleeving.
- () Connect the free lamp lead to the junction of the two LED leads and the yellow wire (S-4).

NOTE: The other resistor lead will be connected later.

Set the chassis aside until it is called for.





VCO CIRCUIT BOARD

PARTS LIST

- () Open the box marked "Packs 1—5 TOP."
- () Refer to the Pack Index Sheet and locate Pack #1.
- () Unpack these parts and check each part against the following list. The key numbers correspond to the numbers on the "VCO Circuit Board Parts Pictorial" (Illustration Booklet, Page 6).

To order a replacement part, always include the PART NUMBER. Use the Parts Order Form furnished with this kit. If one is not available, see "Replacement Parts" inside the rear cover of this Manual. For price information, refer to the separate "Heath Parts Price List."

KEY No.	Part No.	QTY	. DESCRIPTION	CIRCUIT Comp. No.	KEY <u>No.</u>	HEATH Part No.	QTY	. DESCRIPTION	CIRCUIT Comp. No.
RE	SISTORS,	1/4-	-Watt		CA	PACITO	RS		
NOT indic	TE: The follow cated by a fo	wing routh c	esistors have a tolerance of color band of gold.	5%. 5% is	B1 B2 B2	21-168 20-99 20-177	>>1 >>1 >>1 >>1	4.7 pF ceramic 22 pF mica 125 pF mica	C505 C509 C513
A1 A1	6-222-12 6-332-12	†1 ≯5	2200 Ω (red-red-red) 3300 Ω (orange-orange-red)	R502 R505, R506, R507, R508,	В3	21-145	X 7	.001 μF feedthrough (2 extra)	C514, C515, C516, C518, C519
A 1	6-103-12	⊹3	10 k Ω (brown-black-orange)	R511 R501, R504, R509	B1 B1 B4	21-176 21-192 25-255	∱1 √ 2 ⅓1	.01 μ F ceramic .1 μ F ceramic .22 μ F tantalum	C512 C503, C506 C507
A 1	6-104-12	71	100 k Ω (brown-black-yellow	R503	B5 B6	25-200 31-57	∀4 ∀1	.68 μF tantalum 2.7-20 pF trimmer	C501, C502, C504, C508 C511



KEY HEATH QTY. DESCRIPTION CIRCUIT

No. Part No. Comp. No.

DIODES

C1	56-77	X 1	FV1010	VD501
C2	56-640	¥-1	MV2110	VD502

TRANSISTORS — INTEGRATED CIRCUITS (IC's)

NOTE: Transistors and integrated circuits may be marked for identification in any of the following four ways:

- 1. Part number.
- 2. Type number. (On integrated circuits, this refers only to the numbers; the letters may be different or missing.)
- 3. Part number and type number.
- 4. Part number with a type number other than the one listed.

D1	417-801	×2	MPSA20 transistor	Q501, Q503
D1	417-865	<u>^1</u>	MPSA55 transistor	Q504
D1	417-134	¥1	MPS6520 transistor	Q502
D1	442-627	γ 1	78L05 IC	IC501
D2	443-740	x 1	MC1648P IC	IC502

HARDWARE

#4 Hardware

E1	250-489	2	4-40 × 3/16" self-
			tapping screw
E2	250-34	[≮] 2	4-40 × 1/2" screw
E3	252-2	, ≾4	4-40 nut
E4	253-80	2	#4 flat washer
E5	254-9	6	#4 lockwasher

KEY HEATH QTY. DESCRIPTION CIRCUIT
No. Part No. ____ Comp. No.

Hardware (cont'd.)

Other Hardware

F1	250-89	× 1	6-32 × 3/8" screw
F2	250-357	×1	$6-32 \times 3/8''$ black nylon
			screw
F3	257-12	X.2	Eyelet
F4	259-6	×4	Small solder lug
F5	260-65	<i>x</i> 1	Clip
F6	254-1	2	#6 lockwasher

MISCELLANEOUS

G1	40-1855	X.1	.25 μ H coil (blue)	L501
G2	75-108	×1	Paper insulator	
			(2" × 1-3/4")	
G3	206-1242	½1	Bottom VCO shield	
G4	206-1243	×1	Top VCO shield	
G5	351-9	γ1	Ероху	
G6	438-46	≯1	Phono plug, 3/8" tip	
	406-664	× 1	Magnifier	

PART FROM THE MAIN PACK

85-1878-2 <1 VCO circuit board




STEP-BY-STEP ASSEMBLY

START-

NOTE: In the following steps you will be given detailed instructions on how to install and solder the first part on a circuit board. Read and perform each step carefully. Then use the same procedure whenever you install parts on a circuit board.

Position the circuit board as shown with the printed side up.

R503: Hold a 100 kΩ (brownblack-yellow) resistor by the body as shown and bend the leads straight down.




Push the leads through the holes at the indicated location on the circuit board. The end with color bands may be positioned either way.

Press the resistor against the circuit board. Then bend the leads outward slightly to hold the resistor in place.




CAUTON: This Transceiver operates in the vhf region. Therefore, as you build this kit, be sure you make perfect solder connections. Work carefully. Do not use excessive amounts of solder, cut off all leads and lugs close to the circuit board.




CONTINUE


-) Solder the resistor leads to the circuit board as follows:
 - Push the soldering iron tip against both the lead and the circuit board foil. Heat both for 2 or 3 seconds.



Then apply solder to the other side of the connection. IMPORTANT: Let the heated lead and the circuit board foil melt the solder.




 As the solder begins to melt, allow it to flow around the connection. Then remove the solder and the iron and let the connection cool.



- Cut off the excess lead length close to the connection. CAUTION: Hold the lead with one hand to prevent the lead from hitting you in the eye.
- Check the connection. Compare it to the illustrations on the next page. After you have checked the solder connections, proceed with the assembly on Page 30. Use the same soldering procedure for each connection.




A GOOD SOLDER CONNECTION

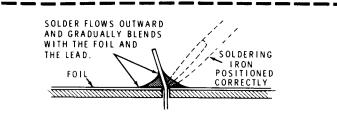


When you heat the lead and the circuit board foil at the same time, the solder will flow evenly onto the lead and the foil. The solder will make a good electrical connection between the lead and the foil.

POOR SOLDER CONNECTIONS

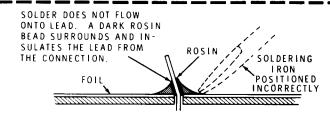

When the lead is not heated sufficiently, the solder will not flow onto the lead as shown above. To correct, reheat the connection and, if necessary, apply a small amount of additional solder to obtain a good connection.

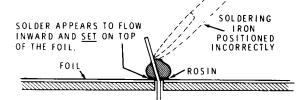


When the foil is not heated sufficiently the solder will blob on the circuit board as shown above. To correct, reheat the connection and, if necessary, apply a small amount of additional solder to obtain a good connection.

SOLDER BRIDGES

A solder bridge between two adjacent foils is shown in photograph A. Photograph B shows how the connection should appear. A solder bridge may occur if you accidentally touch an adjacent previously soldered connection, if you use too much solder, or if you "drag" the soldering iron across other foils as you remove it from the connection. A good rule to follow is; always take a good look at the foil area around each lead before you solder it. Then, when you solder the connection, make sure the solder remains in this area and does not bridge to another foil. This is especially important when the foils are small and close together. NOTE: It is alright for solder to bridge two connections on the same foil.


Use only enough solder to make a good connection, and lift the soldering iron straight up from the circuit board. If a solder bridge should develop, turn the circuit board foil-side-down and heat the solder between connections. The excess solder will run onto the tip of the soldering iron, and this will remove the solder bridge. NOTE: The foil side of each circuit board has a coating on it called "solder resist." This is a protective insulation to help prevent solder bridges.

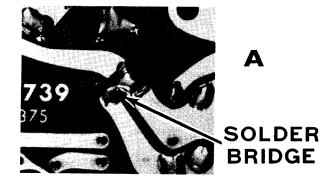





START -

NOTE: The indexed (pin 1) end of inline integrated circuits may be marked in a number of ways such as a notch, triangle, dot, the numeral 1,





(V) IG502: MC1648P integrated circuit (#443-740). See Detail 2.2A. Then position the pin 1 end of the IC over the index mark on the circuit board as shown. Then insert the pins into the circuit board and solder them to the foil. Do not solder the leads that do not have foil.




NOTE: When you install a diode, always match the band on the diode with the band mark on the circuit board. A DIODE WILL NOT WORK IF INSTALLED BACKWARDS. See Detail 2-2B.





VD501: FV1010 diode (#56-77).
Solder the leads to the foil and cut off the excess lead lengths.

Before you install an IC, first be sure the pins are straight. Then lay it down on one of its rows of pins, as shown at A and roll it over until the pins are at right angles or bent in slightly as shown at B. Repeat this process for the other row of pins.




Detail 2-2A

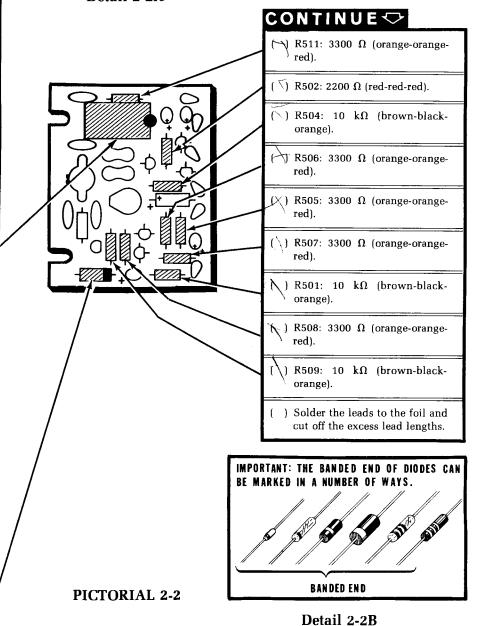

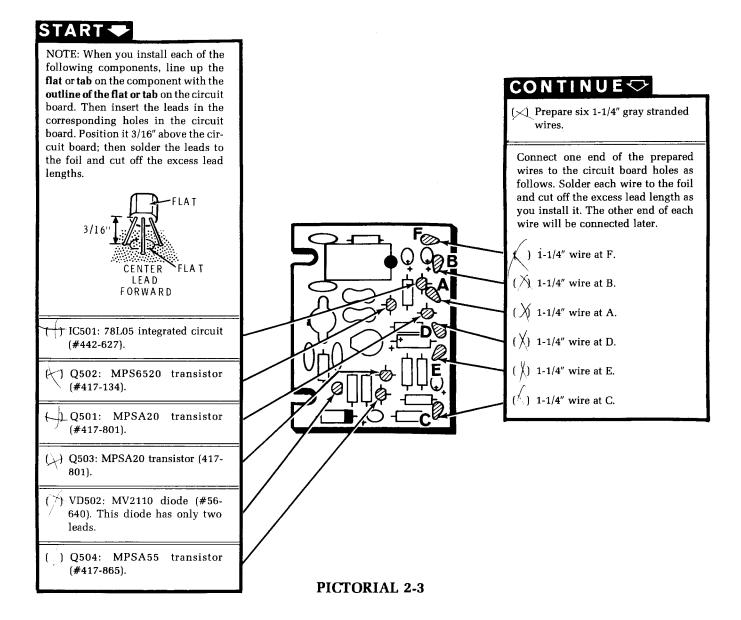



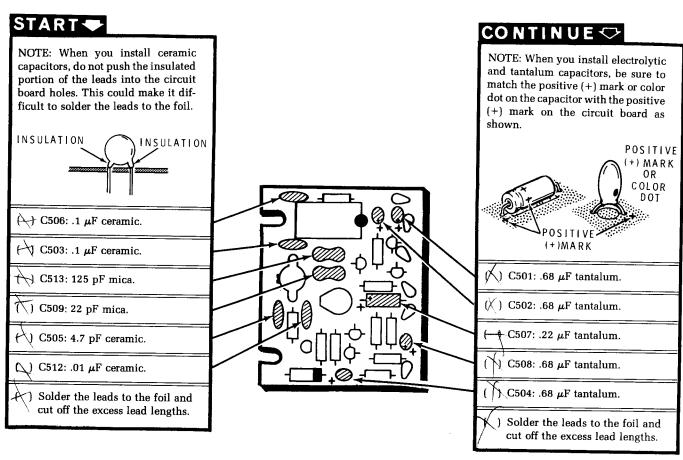

PICTORIAL 2-4


START


C511: 2.7-20 pF trimmer (#31-57). Solder two lugs to the foil. Do not solder the lug that has no foil.



L501: .25 µH coil (#40-1855).

Install the coil so the tab is positioned as shown on the circuit board. Hold this coil down tightly against the circuit board while you solder the leads to the foil. Then cut off the excess lead lengths.





PICTORIAL 2-5

CONTINUE 🗘

CIRCUIT BOARD CHECKOUT

Carefully inspect the foil side of the circuit board for the following most commonly made errors.

- (/) Unsoldered connections.
- () "Poor" solder connections.
- (X) Solder bridges between foil patterns.
- (/) Protruding leads which could touch together or the chassis when the circuit board is installed later.

Refer to the illustrations where the parts were installed as you make the following visual checks.

- (\(\frac{1}{2}\)) Transistors for proper type and installation.
- (/) Integrated circuits for the proper type and installation.
- () Electrolytic capacitors for the correct position of the positive (+) mark.
- () Diodes for the correct orientation.



Refer to Pictorial 2-6 (Illustration Booklet, Page 6) for the following steps.

Push the tops of capacitors C513 and C509 together. Also push the top of capacitor C503 against coil L501.

NOTE: Perform the next three steps carefully but quickly. The epoxy sets in five minutes.


- Open the package of epoxy. Then use the following procedure to prepare some of the epoxy for use in the next two steps.
 - 1. Remove the clamp from between the epoxy sections.
 - 2. Cut the sections apart at the point where the clamp was. NOTE: Be careful that you do not squeeze any of the liquid out yet.
 - 3. Squeeze out **half** of the contents from each section onto a piece of paper. Save the remaining epoxy for use in a later section of the Manual.

4. Use a toothpick or similar object to thoroughly mix the epoxy, on the piece of paper, together.

NOTE: Be careful in the next two steps that you do not get epoxy on trimmer capacitor C511.

- Use a toothpick or similar object to put some epoxy around the bottom of coil L501. Use only enough epoxy to secure the coil to the circuit board.
- Also put some epoxy between capacitor C503 and coil L501 and capacitor C513 and C509 to hold them together. Use only enough epoxy to hold the capacitors together.
- Discard the remaining epoxy that is mixed together.

INSTALLATION

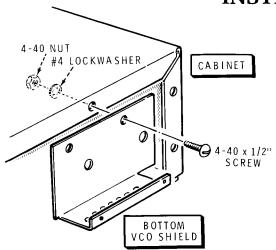

Refer to Pictorial 2-7 (Illustration Booklet, Page 6) for the following steps.

Detail 2-7A

NOTES:

- You will use the Transceiver cabinet to hold the bottom VCO shield in a convenient position while you prepare the shield.
- 2. Perform the following steps carefully. They have a direct affect on the proper operation of the Transceiver.


(Locate the Transceiver cabinet.

() Refer to Detail 2-7A and temporarily mount the bottom VCO shield (#206-1242) to the cabinet with $4-40 \times 1/2$ " hardware. Be sure to position the shield as shown.

NOTE: When you solder the eyelet to the shield in the next step, do not allow the solder to flow into the eyelet.


- (>) Refer to Detail 2-7B, Part A, and prepare two eyelets as shown. Then refer to Part B and insert one of the eyelets into hole EA in the shield and solder the flange on the eyelet to the shield.
- () In the same way, mount the other eyelet at EB.
- Loosen the hardware that holds the shield to the cabinet. Then rotate the shield so the eyelets extend upward.
- (\(\)) Refer to Detail 2-7C, Part A, and prepare five .001 μF feedthrough capacitors as shown. Use the back part of the cutter jaws as shown. NOTE: Two extra feedthrough capacitors are supplied in case you break one.
- Refer to Detail 2-7C, Part B, and insert a prepared .001 μ F feedthrough capacitor into hole C515 in the shield. Then solder the flange on the capacitor to the shield.




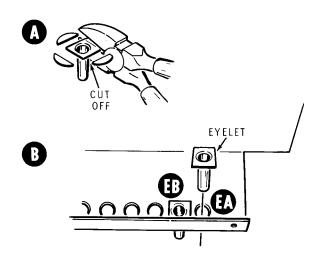


Detail 2-7B

- () In the same way, install prepared feedthrough capacitors at C514, C517, C518, and C516. Allow the shield to cool before you proceed to the next step.
- Remove the VCO shield from the cabinet. Set the cabinet and hardware aside until they are called for in a step.
- Mount a small solder lug to the shield at EC as shown in the Pictorial. Use $4-40 \times 1/2''$ hardware and a #4 flat washer.
- () In the same way, mount another small solder lug at ED.




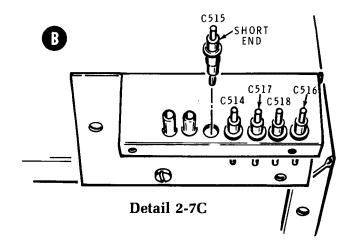

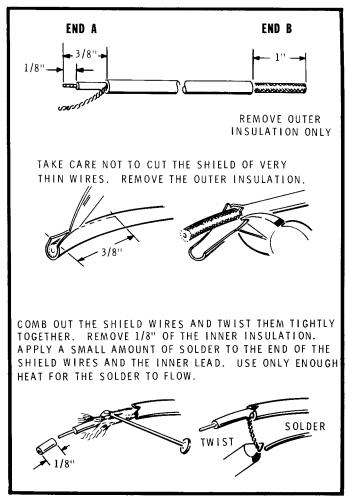


Detail 2-7D

- Refer to Detail 2-7D and prepare a 5-1/2" length of shielded cable as shown.
- Refer to Detail 2-7E and prepare end B of the cable as shown. Be careful you do not cut the insulation on the inner wire of the cable.

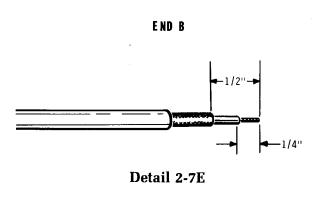




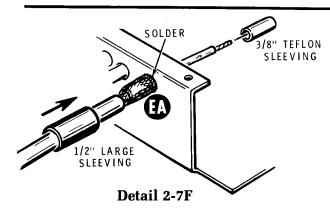


- Refer to Detail 2-7F and install end B of the cable into the eyelet at EA as follows:
- 1. Push the inner wire at end B of the cable into the eyelet at EA. At the same time, form the shield braid over the eyelet as shown.
- 2. Cut a 3/8" length of teflon sleeving.
- 3. From inside the VCO shield, slide the 3/8" length of sleeving over the inner cable wire and into the eyelet.
- 4. Carefully solder the shield braid to the eyelet.

 Do not move the assembly until the solder cools.
- 5. Cut a 1/2" length of large (heat shrinkable) sleeving.
- 6. Install the sleeving over the shield braid on the eyelet. Then use heat to shrink the sleeving as you did before.

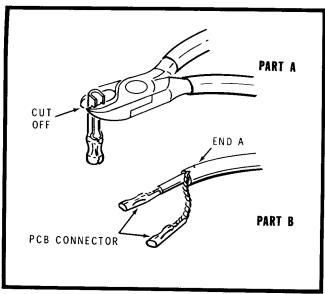


Detail 2-7G

- Refer to Detail 2-7G and prepare two PCB connectors as shown. Then install the connectors on the inner and shield lead at end A of the cable.
- Cut two 1/2" lengths of medium (heat shrinkable) sleeving.
- () Install a 1/2" length of sleeving on each PCB connector on the end of the cable. This end of the cable will be connected later.
- Refer to Detail 2-7H and prepare an 8" shielded cable as shown.
- Refer back to Detail 2-7E and prepare end B of the cable as shown.
- () Install end B of the cable in the eyelet at EB. Use the same procedure as you did for the other cable. Refer back to to Detail 2-7F if necessary.

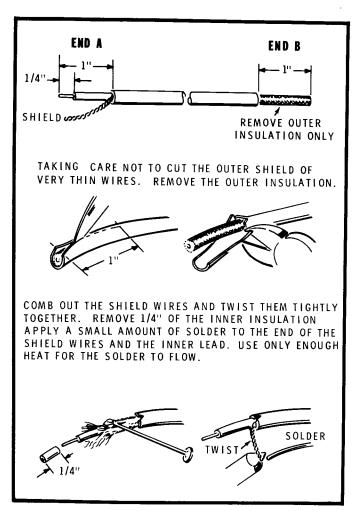

Detail 2-7H




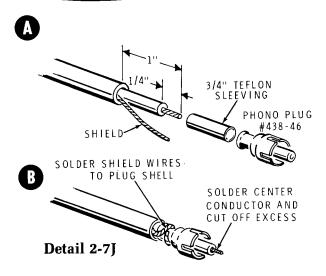


(**) Refer to Detail 2-7J and install a phono plug (**438-46) on end A of this cable as shown. Be sure to slide a 3/4" length of teflon sleeving onto the inner lead before you install the plug.

Refer to Pictorial 2-8 for the following steps.

NOTE: When you install the nylon screw in the next step, be careful you do not overtighten this screw.

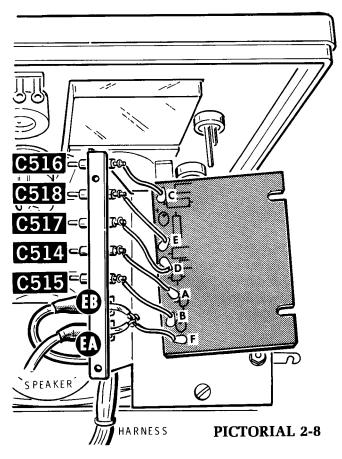

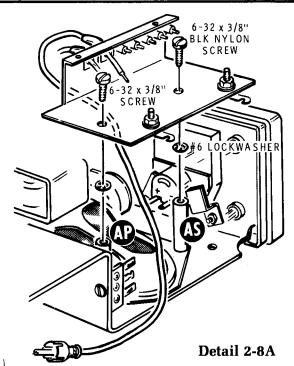


- Refer to Detail 2-8A and mount the bottom VCO shield onto the spacers on the chassis. Use a 6-32 × 3/8" black nylon screw and #6 lockwasher at AS. Use a 6-32 × 3/8" screw and #6 lockwasher at AP. Be sure to route the shielded cable with the phono plug on the other end under the shield as shown. Also, be sure to position the harness between the shield and the speaker, as shown in the Pictorial.
- (X) Locate the VCO circuit board. Then position it near the shield as shown.
- Bend a small hook in the ends of the two shielded cables coming from the eyelets at EA and EB. Then connect the free end of the wire coming from circuit board hole F to the ends of these cables as shown (S-3).

Connect the free ends of the wires coming from the circuit board holes to the feedthrough capacitors as follows:


- $(\ \)$ Wire from hole B to C515 (S-1).
- (V) Wire from hole A to C514 (S-1).
- (\lor) Wire from hole D to C517 (S-1).
- (\checkmark) Wire from hole E to C518 (S-1).
- (N) Wire from hole C to C516 (S-1).






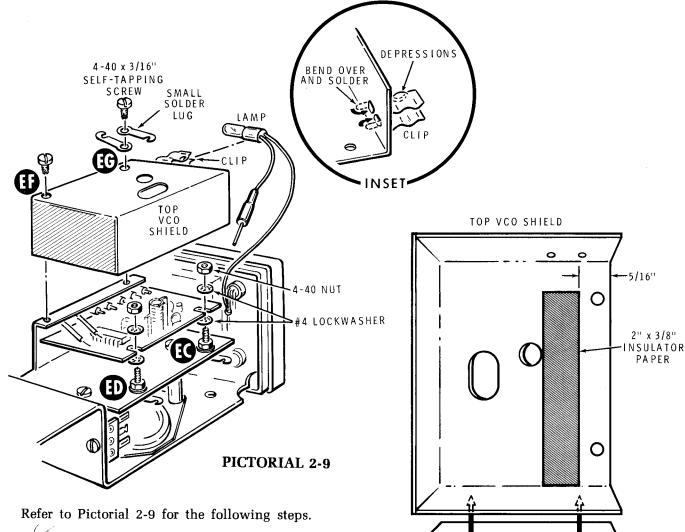

Carefully push the VCO circuit board into the shield. Then mount the board with two #4 lockwashers and a 4-40 nut at EC and ED. Be sure you do not pinch any wires between the circuit board and the shield.



Detail 2-9A



1-3/4" x 7/8"

INSULATOR


PAPER

Cut two insulators from the $2'' \times 1-3/4''$ piece of insulator paper as shown in Detail 2-9A.

Carefully peel the backing paper from the 2" × 3/8" piece of insulator paper. Then press the insulator onto the inside of the top VCO shield as shown in Detail 2-9B.

Detail 2-9B



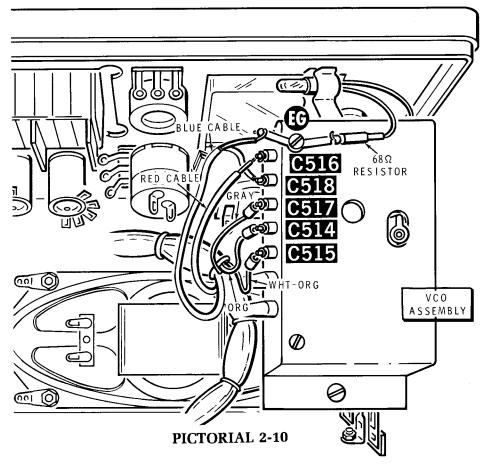

- Carefully peel the backing paper from the 1-3/4" × 7/8" piece of insulator paper. Then press the insulator onto the side of the top VCO shield as shown in Detail 2-9B.
- Push the lamp coming from the chassis into the clip as shown.
- () Mount the top VCO shield to the bottom VCO shield at EF with a 4-40 \times 3/16" self-tapping screw.
- Mount two small solder lugs at EG with a 4-40 \times 3/16" self-tapping screw. Be sure to position the solder lugs as shown.

Refer to Pictorial 2-10 for the following steps.

Connect the wires coming from BO 8 of the wire harness to the feedthrough capacitors on the VCO assembly as follows:

Remove another 1/4" of insulation (total 1/2") from the free ends of the orange, gray, and white-orange harness wires.

- Slide a 1.07 μ H ferrite bead onto the end of the white-orange wire. Then connect the wire to capacitor C515 (S-1).
- Slide a 1.07 μ H ferrite bead onto the end of the orange wire. Then connect the wire to C514 (S-1).
- Slide a 1.07 μ H ferrite bead onto the end of the gray wire. Then connect the wire to C517 (S-1).
- Connect the blue cable inner lead to C518 (S-1) and the shield lead to the solder lug at EG (S-1).
 Use 1/2" of small sleeving on the shield lead.
- () Cut the shield lead off of the red cable. Then connect the inner wire to C516 (S-1).
- Connect the free end of the 68 ohm resistor, coming from the lamp assembly, to the indicated solder lug at EG (S-1).

Set the chassis assembly aside until it is called for.





CIRCUIT

Comp. No.

RECEIVER CIRCUIT BOARD

PARTS LIST

KEY HEATH

No. Part No.

- () Refer to the Pack Index Sheet and locate Pack
- () Unpack these parts and check each part against the following list. The key numbers correspond to the numbers on the "Receiver Circuit Board Parts Pictorial" (Illustration Booklet, Page 7).

To order a replacement part, always include the PART NUMBER. Use the Parts Order Form furnished with this kit. If one is not available, see "Replacement Parts" inside the rear cover of this Manual. For price information, refer to the separate "Heath Parts Price List."

QTY. DESCRIPTION

KEY HEATH No. Part No.	QTY. DESCRIPTION	CIRCUIT Comp. No.						
RESISTORS, 1/4-Watt								
NOTES:								
Open all of t	ay be packed in more than he resistor envelopes in this p against the following list.	one envelope. back before you						

	check them	again	st the following list.							
2.	The following resistors have a tolerance of 5%. 5% is indicated by a gold fourth band.									
A1 A1	6-100-12 6-101-12	<u></u>	10 Ω (brown-black-black) 100 Ω (brown-black-brown)	R208 R207, R211, R212, R216, R218, R221, R230, R231, R247						
A 1	6-121-12	استر	120 Ω (brown-red-brown)	R232						
A1	6-221-12	7	220 Ω (red-red-brown)	R235						

270 Ω (red-violet-brown)

330 $\boldsymbol{\Omega}$ (orange-orange-

brown)

6-271-12

6-331-12

R254

R203, R205, R215

R219, R243,

Resistors (cont'd.)									
A1	6-471-12	1,1	470 Ω (yellow-violet-brown)	R226					
A1	6-102-12	_√2	1000 Ω (brown-black-red)	R227, R234					
A 1	6-222-12	7 4	2200 Ω (red-red-red)	R224, R238,					
		1		R242, R253					
A1	6-332-12	√3	3300 Ω (orange-orange-	R241, R245,					
			red)	R251					
A1	6-392-12	71	3900 Ω (orange-white-red)	R228					
A1	6-472-12	72	4700 Ω (yellow-violet-red)	R225, R245					
A1	6-103-12	160	10 kΩ (brown-black-orange)	R204, R206,					
		700		R209, R214,					
				R237, R249,					
		\		R252					
A 1	6-153-12	<i>→</i> 3	15 k Ω (brown-green-	R233, R236,					
			orange)	R248					
A 1	6-223-12	+3	22 k Ω (red-red-orange)	R223, R239,					
		+		R244					
A 1	6-273-12	1/	27 kΩ (red-violet-orange)	R222					
A 1	6-333-12		33 kΩ (orange-orange-	R202					
			orange)						
A 1	6-473-12	7	47 kΩ (yellow-violet-	R217					
		~1	orange)						
A 1	6-104-12	3	100 k Ω (brown-black-yellow)	R201, R213,					
				R229					



	HEATH Part No.	QTY.	DESCRIPTION	CIRCUIT Comp. No.		HEATH Part No.	QTY	. DESCRIPTION	CIRCUIT Comp. No.
CA	PACITOR	RS			Сар	acitors	(cont'	d.)	
Mic	a				Myla	ar			
B1 B1 B1	20-161 20-183 20-103	大 ¹ く ¹ く ¹	68 pF 120 pF 150 pF	C262 C237 C236	B6 B6	27-70 27-63	X 1 x 1	.0022 μF (2200 pF) .022 μF	C252 C243
Ce	ramic				Phe	nolic			
B2 B2	21-33 21-168	/2 /3	3.3 pF 4.7 pF	C256, C257 C214, C215 C216	B7	28-3	<u>χ</u> 1	.56 pF (green-blue-gray- silver)	C208
B 2	21-78	×4	5 pF	C201, C203, C207, C264	В7	28-2	2	1 pF (brown-black-white- silver)	C202, C258
B2 B2 B2	21-169 21-3 21-111	*1 *1 */1	6 pF 10 pF 15 pF	C226 C209 C213					
B2	21-7	/1	33 pF	C233	IND	UCTORS	3		
B 2	21-11	∱,3	150 pF	C225, C228, C263		00.0110			
B2	21-56	11	470 pF	C235	C1 C2	40-1613 40-1614	×1	.15 μH coil .16 μH coil	L201 L202, L203
B2	21-140	18	.001 μF	C204, C205, C206, C249, C254, C255, C266, C269	C3 C4 C5 C5	40-1615 40-1616 40-1617 52-118	×2 ×1 ×1 ×1 ×2	.16 μH coil .15 μH coil .16 μH coil .16 μH coil 455 kHz transformer	L202, L203 L204 L212 L213 L208, L210
B2	21-176	≯ 43	.01 μF	C211, C212, C217, C218, C219, C222, C224, C227,	C5 C6	52-154 45-82	x 3 ≻1	10.7 MHz transformer350 μH choke	L205, L206 L207 RFC201
				C259, C261, C267, C268, C271	C7 C8 C9	52-160 475-10 45-80	★1 ★1 ★1	455 kHz transformer 1.07 μH ferrite bead 1 mH choke (brown-black- red-silver)	L209 FB201 L211
B2 B2	21-143 21-95	,;2 √11	.05 μF .1 μF	C244, C245 C221, C223, C229, C231, C232, C234,				reu-siiver)	
				C238, C241, C242, C265,	DIO	DES			
				C272	D1 D1	56-26 56-56	2 1	1N191 (brown-white-brown) 1N4149	D202, D203 D201
Ele	ctrolytic								
B3 B4	25-210 25-221	∀1 ∀3	.22 μ F (tantalum) 2.2 μ F (tantalum)	C248 C251, C273, C274					
B4 B5	25-223 25-839	\2 +1	47 μF (tantalum) 470 μF	C246, C247 C253					

101cc)



KEY HEATH No. Part No. QTY. DESCRIPTION

CIRCUIT Comp. No.

KEY HEATH (No. Part No.

QTY. DESCRIPTION

CIRCUIT Comp. No.

TRANSISTORS — INTEGRATED CIRCUITS (IC's)

NOTE: Transistors and integrated circuits may be marked for identification in any of the following four ways:

- 1. Part number.
- 2. Type number. (On integrated circuits, this refers only to the numbers; the letters may be different or missing.)
- 3. Part number and type number.
- 4. Part number and a type number other than the one listed.

E1	417-154	†3	2N2369 transistor	Q208
E2	417-863		MFE131 transistor	Q201, Q202,
E2 E3 E3	417-290 417-241 417-801	H T1 T7	MRF502 transistor EL131 transistor MPSA20 transistor	Q203 Q207 Q204 Q205, Q206,
		1		Q209, Q210, Q211, Q212, Q213
E4	442-28	#1	MC1357P IC	IC202
E4	442-610	#1	TBA820 IC	IC203
E5	442-20	#1	UA703 IC	IC201

HARDWARE

F1	252-3	4 4	6-32 nut
F2	254-1	√7	#6 lockwashe
F3	259-1	``. 1	#6 solder lua

MISCELLANEOUS


	75-108	> 1	Paper insulator $(2'' \times 1-3/4'')$	
G1	206-1278	_† 1	RF shield	
G2	346-60	+1	Clear sleeving (1-1/2")	
G3	404-537	*1	10.245 MHz crystal	Y205
	404-573	1	Set of four crystal filters	
			consisting of:	
G4	404-574	× 2	Filters	Y201, Y204
G4	404-575	√ 2	Filters	Y202, Y203
G5	432-121	人17	Small PCB pin (3 extra)	
G6	434-298	√_2	14-pin IC socket	
G7	490-111	1	IC lifter	

PART FROM THE MAIN PACK

85-1880-6 1 Receiver circuit board




STEP-BY-STEP ASSEMBLY

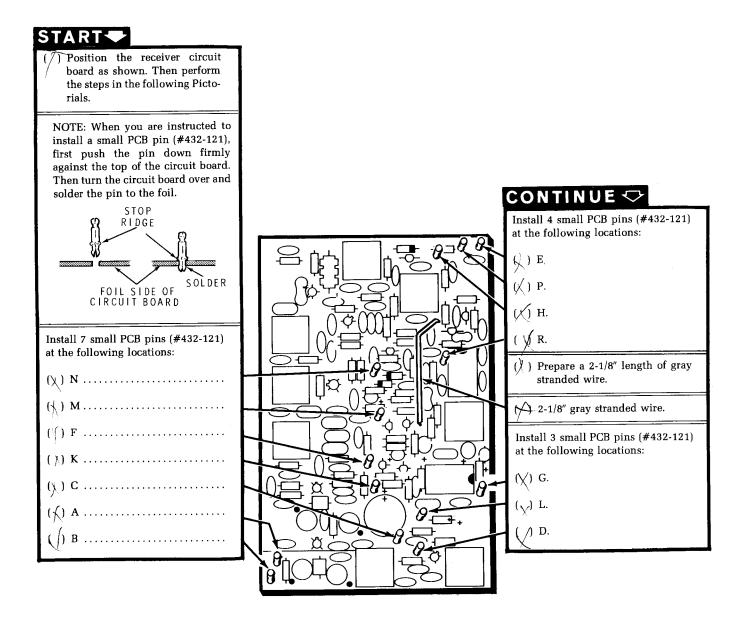

PICTORIAL 3-1



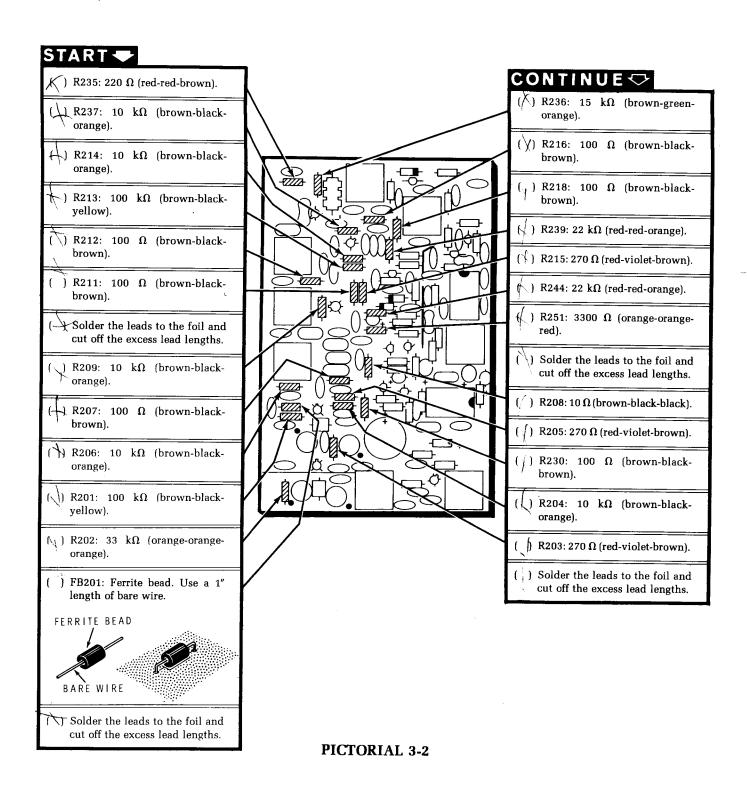

0 1/4 1/2 3/4 1 (INCHES) 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

START -

NOTE: When you install a diode, position its banded end as shown in the Pictorial. A circuit will not operate properly if the diode is installed backward.




BANDED END


- () D201: 1N4149 diode (#56-56).
- R217: 47 k Ω (yellow-violet-orange).
- (\nearrow) R223: 22 k Ω (red-red-orange).
- (R241: 3300 Ω (orange-orange-red).
- R221: 100 Ω (brown-black-brown).
- (\nearrow) R242: 2200 Ω (red-red-red).
- (A) D202: 1N191 diode (#56-26 brown-white-brown).
- (1) D203: 1N191 diode (#56-26 brown-white-brown).
- Solder the leads to the foil and cut off the excess lead lengths.
- (1) R245: 4700 Ω (yellow-violet-red).
- (\checkmark) R246: 3300 Ω (orange-orange-red).
- (k) R248: 15 kΩ (brown-greenorange).
- (k) R249: 10 k Ω (brown-black-orange).
- (\nearrow) R247: 100 Ω (brown-blackbrown).
- (R253: 2200 Ω (red-red-red).
- (R227: 1000 Ω (brown-black-red).
- Solder the leads to the foil and cut off the excess lead lengths.

CONTINUE

- (\nearrow) R238: 2200 Ω (red-red-red).
- (R225: 4700 Ω (yellow-violetred).
- (\times) R226: 470 Ω (yellow-violetbrown).
- (χ) R224: 2200 Ω (red-red-red).
- (\checkmark) R243: 330 Ω (orange-orange-brown).
- (\checkmark) R219: 330 Ω (orange-orange-brown).
- ($\sqrt{\ }$) R222: 27 k Ω (red-violet-orange).
- Solder the leads to the foil and cut off the excess lead lengths.
- \bigwedge R232: 120 Ω (brown-redbrown).
- (\checkmark) R252: 10 k Ω (brown-black-orange).
- (\times R231: 100 Ω (brown-black-brown).
- (\bigwedge) R229: 100 k Ω (brown-black-yellow).
- (\swarrow) R228: 3900 Ω (orange-white-red).
- (\nearrow) R234: 1000 Ω (brown-black-red).
- (\checkmark) R254: 330 Ω (orange-orange-brown).
- ($\cancel{\times}$) R233: 15 k Ω (brown-green-orange).
- Solder the leads to the foil and cut off the excess lead lengths.

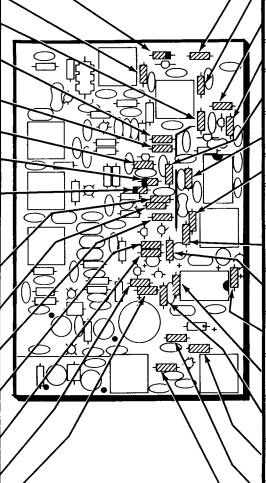

PICTORIAL 3-3

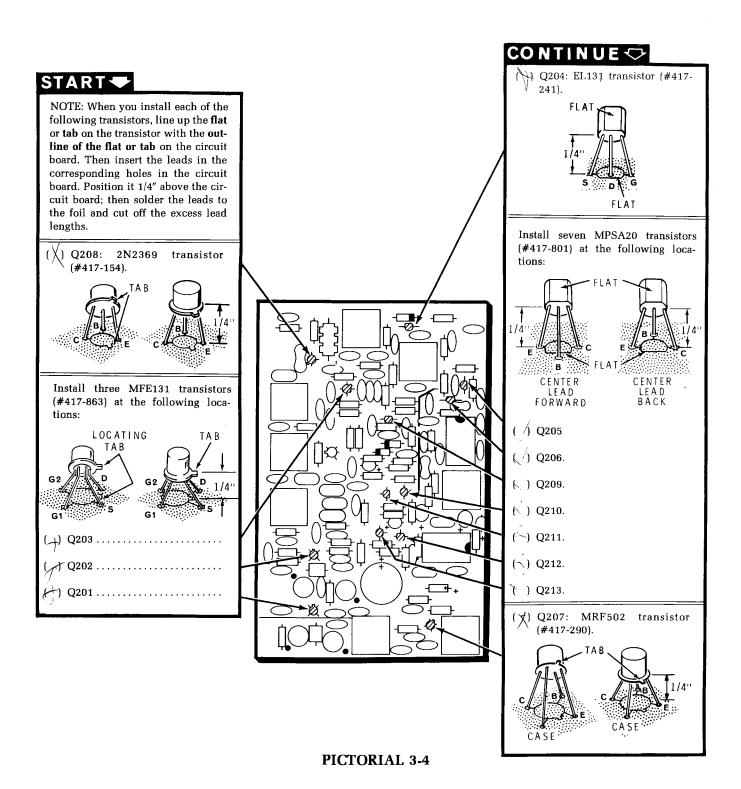


START -

NOTE: When you mount the following choke, be sure you bend the leads toward the slots in the core.




- (/) RFC201: 350 μH choke (#45-82). Mount this choke so its body is 1/16" above the circuit board.
- (L211: 1 mH choke (#45-80, brown-black-red-silver).
- () Solder the leads to the foil and cut off the excess lead lengths.
- (>) Position the UA703 integrated circuit (#442-20) as shown and cut off the lead nearest the tab.




Position the tab on the IC over the outline of the tab on the circuit board. Then insert the leads in the corresponding holes in the circuit board. Position it 1/4" above the circuit board. Then solder the five leads to the foil and cut off the excess lead lengths.




- (1) 14-pin IC socket. Solder the lugs to the foil. Push the 1 mH choke (L211) out of the way as necessary.
- () Refer to Detail 3-5A and use long-nose pliers to remove the indicated pin from a 14-pin IC socket. Discard the removed pin.
- Refer to Detail 3-5B and install the prepared IC socket as shown. Be sure to position the space on the socket where you removed the pin as shown. Your board does not have a hole at this location. Solder the lugs to the foil.



Detail 3-5A

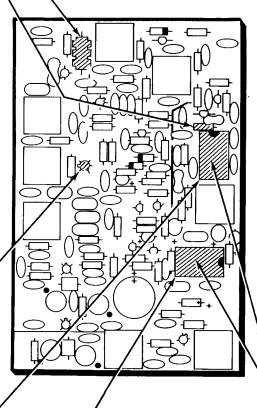


PICTORIAL 3-5




Detail 3-5B

CONTINUE


NOTE: The indexed (pin 1) end of inline integrated circuits may be marked in a number of ways such as a notch, triangle, dot, the numeral 1, etc.






Be sure you install each IC so its pin 1 end is toward the index mark on the circuit board.

Before you apply downward pressure to an IC, make sure each pin is centered in its proper socket hole. Handle IC's with care as their pins are very easily bent.




IC203: TBA820 integrated circuit (#442-610).


NOTE: An IC lifter has been furnished so you can remove an inline IC from its socket if this should be necessary.




Push the shorter end of the lifter in between the IC and the socket and rock the longer portion back and forth. Be very careful, as the IC pins are very easily bent.

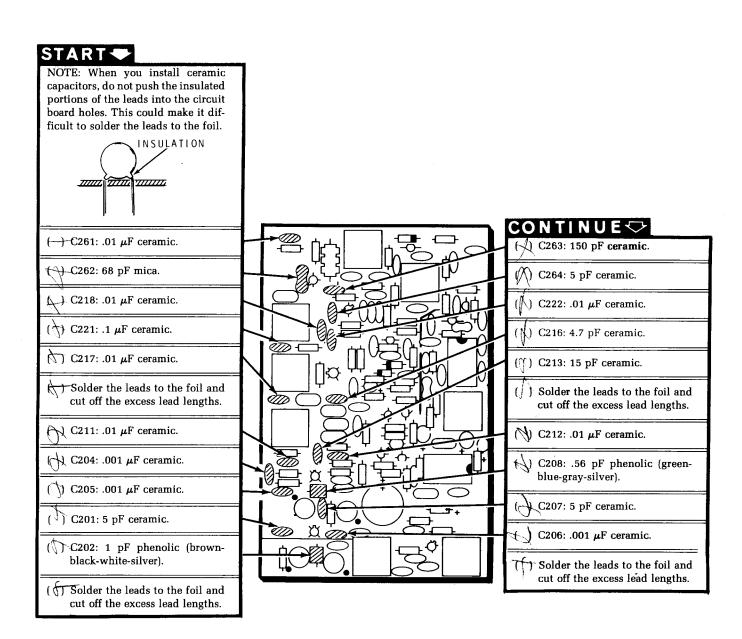

PICTORIAL 3-6

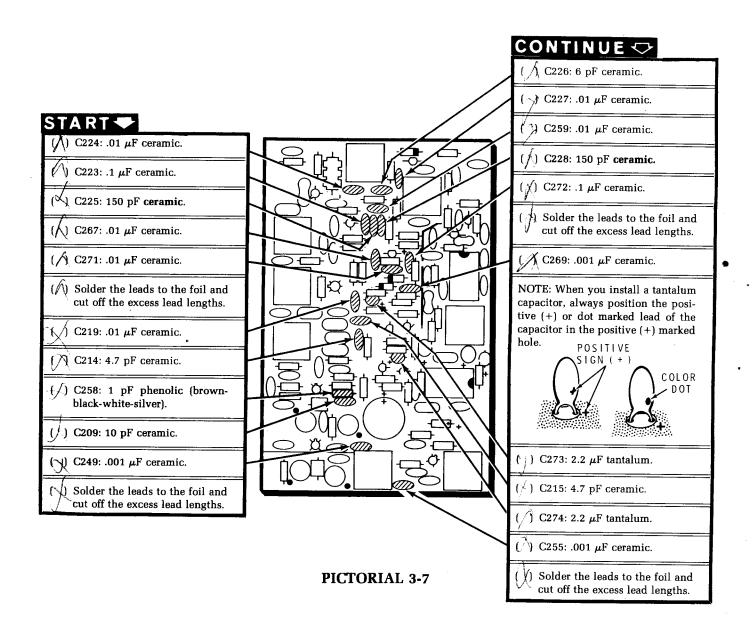

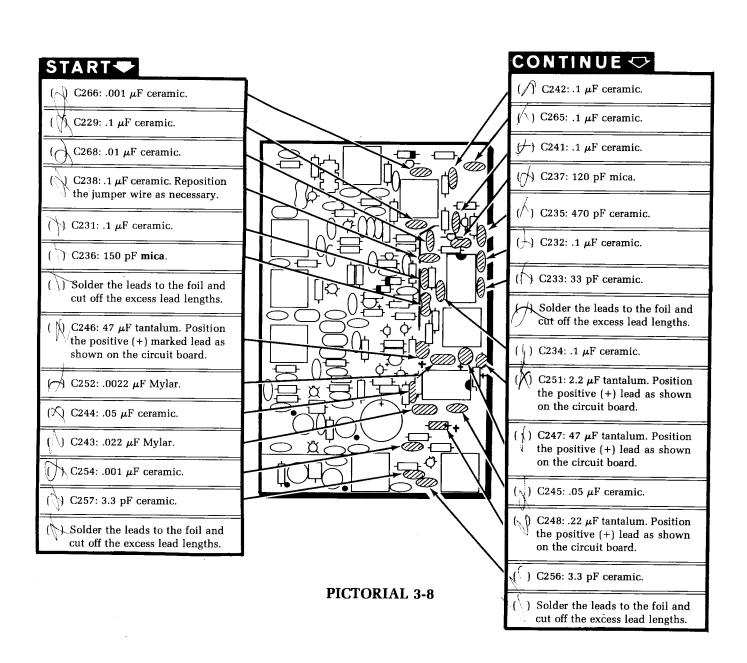



- When you mount a transformer or coil, line up its lugs with the holes in the circuit board; then insert the lugs through the circuit board holes.
- Press the coil firmly against the board. Then solder the lugs to the foil and cut off the excess lug lengths.
- (K) L208: 455 kHz transformer (#52-118).
-) L209: 455 kHz transformer (#52-160).

Mount three 10.7 MHz transformers (#52-154) at the following locations:

[X] L207

(Ž) L206

(1) L205

√ L210: 455 kHz transformer (#52-118).

(Χ) L213: .16 μH coil (#40-1617).

(\bigvee) L212: .15 μ H coil (#40-1616).

CONTINUE <>

NOTE: In the following steps, solder the leads or pins to the foil and cut off the excess lengths as you install each

(K) Y205: 10.245 MHz crystal (#404-537).

NOTE: The container marked #404-573 contains two #404-574 and two #404-575 filters. Use these filters when you perform the following four steps. Be sure you use the number filter called for in each step.

(_{//}) Y204: Filter #404-574.

(V) Y203: Filter #404-575.


(×) Y202: Filter #404-575.

(Y201. Filter #404-574.

($\rlap/$) C253: 470 μ F electrolytic. NOTE: Before you install this capacitor, note the polarity (+ or -) of the identified lead. Be sure you connect the positive (+) lead to the positive (+) marked point on the circuit board.


IDENTIFIED LEAD IS NEGATIVE (-)







shown.

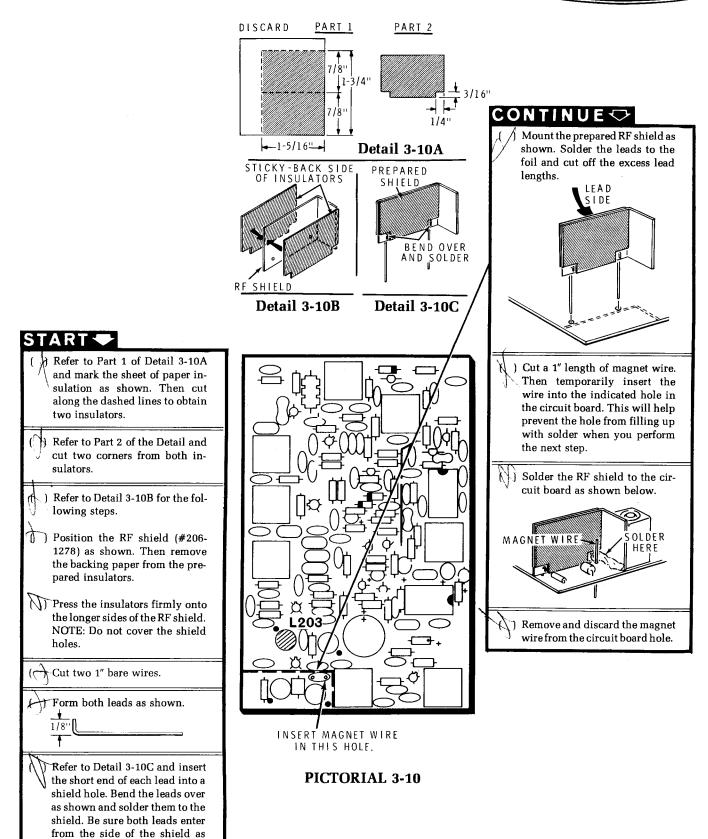

0 1/4 1/2 3/4 1 (INCHES) 2 3 4 5 6 7 9 10 11 12 13 14 15 16 17




START

NOTES:


- In the following steps, each of the coils you will mount has a color dot on or next to one of its mounting lugs. Be sure you mount each coil so its colorcoded lug is in the correspondingly marked circuit board hole.
- If necessary, carefully bend the lugs until they will enter their circuit board holes.
- Solder the lugs to the foil and cut off the excess lug lengths as you mount each coil.
- L204: .16 μH coil (#40-1625).

 Match the color-coded lug with the color dot on the circuit board.
- L203: Locate a #40-1614 coil and note that there is no wire connected to two of the mounting lugs. Cut off the upper part of both of these lugs as shown below. Then mount the coil at L203 on the circuit board.




- Cut the length of clear sleeving to 3/4".
- Carefully work the sleeving down over coil L203 as shown in Detail 3-11A.
- C203: 5 pF ceramic. Solder the leads to the foil and cut off the excess lead lengths.
- \(\) L201: .15
 \(\mu \) H coil (#40-1613).

 Match the color-coded lug to the color dot on the circuit board.
- (1) L202: .16 μH coil (#40-1614). Match the color-coded lug to the color dot on the circuit board.



Detail 3-11A

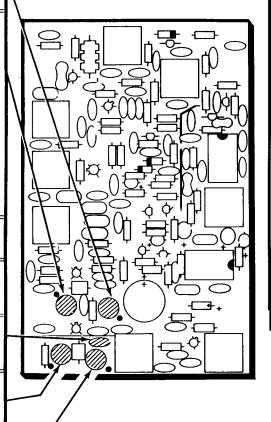

CONTINUE 💠

CIRCUIT BOARD CHECK-OUT

Carefully inspect the foil side of the circuit board for the following most commonly made errors.

- () Unsoldered connections.
- () Poor solder connections.
-) Solder bridges between foil patterns.
- () Protruding leads which could touch together.


Refer to the illustrations where the parts were installed as you make the following visual checks.

- Transistors for proper type and installation.
- () Integrated circuits for the proper type and installation.
- Electrolytic capacitors for the correct position of the positive (+) mark.
- () Diodes for the correct position of the banded end.

FINISH

PICTORIAL 3-11




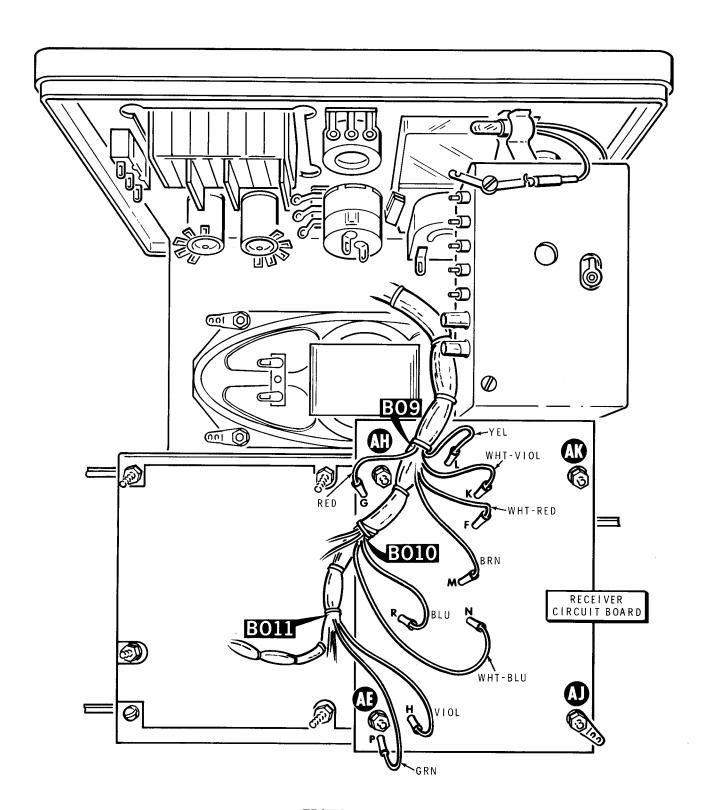

PICTORIAL 3-12



INSTALLATION

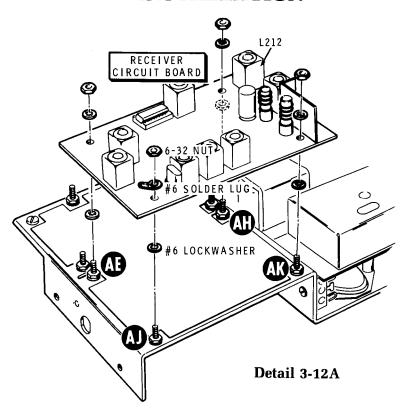

Refer to Pictorial 3-12 for the following steps.

NOTE: If coil L212 hits the speaker in the next step, loosen the speaker mounting hardware. Then push the speaker toward the front panel to provide some clearance. Be sure to retighten the speaker hardware.

Refer to Detail 3-12A and mount the receiver circuit board as shown. Use two #6 lockwashers and a 6-32 nut at AE, AH, and AK. Use one #6 lockwasher, a #6 solder lug, and a 6-32 nut at AJ. Be sure to position the solder lug as shown in the Pictorial.

Connect some of the wires coming from BO 9 of the wire harness to the receiver circuit board as follows:

(f) Red wire to pin G.

(/) Yellow wire to pin L.

White-violet wire to pin K.

(/) White-red wire to pin F.

(M) Brown wire to pin M.

Connect some of the wires coming from BO 10 of the wire harness to the receiver circuit board as follows:

(\nearrow) Blue wire to pin R.

(/) White-blue wire to pin N.

Connect some of the wires coming from BO 11 of the wire harness to the receiver circuit board as follows:

Green wire to pin P.

Violet wire to pin H.

Set the chassis aside until it is called for in a step.



R441, R443

SYNTHESIZER CIRCUIT BOARD

PARTS LIST

- () Refer to the Pack Index Sheet and locate Pack #3.
- () Unpack these parts and check each part against the following list. The key numbers correspond to the numbers on the "Synthesizer Circuit Board Parts Pictorial" (Illustration Booklet, Page 7).

To order a replacement part, always include the PART NUMBER. Use the Parts Order Form furnished with this kit. If one is not available, see "Replacement Parts" inside the rear cover of this Manual. For price information, refer to the separate "Heath Parts Price List."

No.	Y HEATH D. Part No.	QTY	/. DESCRIPTION	CIRCUIT Comp. No.	KEY No.	HEATH Part No.	QTY.	DESCRIPTION	CIRCUIT Comp. No.
					Res	istors (c	ont'd.	.)	
	ESISTORS	, 1/4-	Watt		A1	6-222-12	23	2200 Ω (red-red-red)	R401, R402, R403, R404, R405, R406, R407, R408.
1.	Resistors m Open all of the	he res	packed in more than one istor envelopes in this pack last the following list.						R409, R411, R412, R413, R414, R429, R431, R433,
2.			stors have a tolerance of the description of the store of	5%. 5% is					R435, R437, R439, R442, R444, R445, R453
A1	6-101-12	\ 3	100 Ω (brown-black-brown)	R424, R425,	A1	6-472-12	N	4700 Ω (yellow-violet-red)	R432, R451, R452, R455, R456, R458, R459
A1 A1 A1 A1	6-151-12 6-271-12 6-821-12 6-102-12	1 7 7 A	150 Ω (brown-green-brown) 270 Ω (red-violet-brown) 820 Ω (gray-red-brown) 1000 Ω (brown-black-red)	R446 R454 R418 R447 R415, R417, R426, R457	A1 A1 A1 A1	6-562-12 6-103-12 6-183-12 6-223-12 6-104-12	† 1 † 4 † 1 † 6	5600 Ω (green-blue-red) 10 k Ω (brown-black-orange) 18 k Ω (brown-gray-orange) 22 k Ω (red-red-orange) 100 k Ω (brown-black-yellow)	R427 R419, R423, R428, R448 R449 R416, R422 R421, R434, R436, R438.



KEY No.	HEATH Part No.	QTY	. DESCRIPTION	CIRCUIT Comp. No.		HEATH Part No.	QTY	DESCRIPTION	CIRCUIT Comp. No.
CA	PACITOR	RS			IN	DUCTOR	S		
Mic	20-96		36 pF	C408, C413	C2	>40-1616 >40-1617 >40-961	1 1 1	.15 μH coil .16 μH coil 100 μH coil	L403 L402 L401
B1	20-105	1 1	180 pF	C408, C413		/ 10 00.	•	100 1011 0011	2401
B1	20-126	, 2	255 pF	C438, C439					
		+	·	,	Die	DDES			
Cei	ramic	,			D1 D1	57-65 56-56	√1 √6	1N4002 1N4149	D407 D401, D402, D403, D404,
B2	21-33	 √ 3	3.3 pF	C407, C409, C414					D405, D406
B2	21-723	¥ 5	15 pF	C423, C426, C429, C433, C436	TR	ANSISTO	RS -	- INTEGRATED C	IRCUITS
B 2	21-51	*1	20 pF	C442	(IC	S)			
B2	21-7	½ 2	33 pF	C406, C441	NO	FF. T		4.4	
B 2	21-75	Ĵ 1	100 pF	C403	ider	itification in	ors and	d integrated circuits may the following four ways	y be marked for
B2	21-140	√ ,5	.001 μF	C418, C424, C427, C431, C434	idei	1. Part : 2. Type	numbei numbe	r. er. (On integrated circ	uits, this refers
B2 B2	21-176 21-95	↑5 ★4	.01 μF .1 μF	C405, C411, C412, C437, C444		missi 3. Part i	ng.) numbei	umbers; the letters may and type number. with a type number oth	
DΖ	21-95	3 \ 4	.1 μΓ	C401, C402, C415, C419		listed		,	
					D2 D2	417-240 417-290	⊁-1 ∀1	40673 transistor MRF502 transistor	Q402
Tar	ntalum				D3	417-154	メ1 と 1	2N2369 transistor	Q403 Q406
ıaı	ilaiuiii				D4	417-864	11	MPSA05 transistor	Q414
В3	25-221	⊰ 1	2.2 μF	C416	D4	417-801	1 10	MPSA20 transistor	Q401, Q404,
B3	25-220	71	10 μF	C421			/		Q405, Q407,
B3	25-814	<i>t</i> :1	150 μF	C443	Ī				Q408, Q409,
50	20014	,	100 μ.						Q410, Q411,
									Q412, Q413
Oth	ner				D5	443-61	Х 3	MC4016P IC	IC401, IC402, IC403
	•				D6	443-62	入1	MC4044P IC	IC406
B4	27-77	1/1	.1 μF Mylar	C417	D6	443-1	½ 1	SN7400N IC	IC405
B 5	31-71	₹5	3.2-18 pF trimmer	C422, C425, C428, C432, C435	D6	443-5	X ¹	SN7473N IC	IC404



KEY HE	ATH QTY	Y. DESCRIPTION			HEATH Part No.	QTY.	DESCRIPTION	CIRCUIT Comp. No.
CRYST	ALS			MISC	CELLAN	EOUS		
E1 404	-584 ±1	21.55 MHz	Y405	G1	432-121	× 38	Small PCB pin (2 extra)	
	-585	23.2333 MHz			432-134	- /	Wire socket (1 extra)	
	-586 1	23.3333 MHz					Crystal socket pins	
E1 404	-587 1	23.4333 MHz				ų 3	14-pin IC socket	
					434-299	13	16-pin IC socket	
HARDV	VARE			DAD	T EDOM	TUE	MAIN PACK	
F1 252	·-3 4	6-32 nut		FAN	I FROM	INE	WAIN FACK	
F2 254		#6 lockwasher			85-1877-4	./ 1	Synthesizer circuit board	
12 204	- i	#U IOCKWasiiel	•		00-10//-4	√ 1	Synthesizer circuit board	




STEP-BY-STEP ASSEMBLY


START -

() Position the synthesizer circuit board as shown. Then perform all of the steps in the following Pictorials.

NOTE: When you are instructed to install a small PCB pin (#432-121), first push the pin down firmly against the top of the circuit board. Then turn the circuit board over and solder the pin to the foil.



-) Install 12 small PCB pins (#432-121) in holes A through M.
- () Install 12 small PCB pins (#432-121) at the following locations:
- (⁷) A8
- () A4
- () A2
- (_y) A1
- (<u>/</u>) B8
- () B4
- () B2
- () B1
-) C8
- () C4
- (\(\frac{1}{2}\)) C2
- Δ1 C1

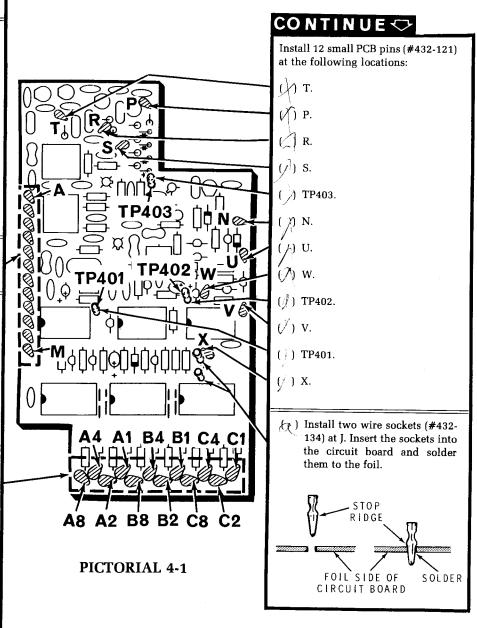




START

When you install the crystal socket pins in the following steps, insert the closed end of each pin through its circuit board hole until 1/16" of the pin protrudes from the foil side of the board. It may be helpful to place the pins on a crystal, as shown in Detail 4-2A, to help hold them while you solder. Be sure to remove the crystal after the connection is cool.

- Install two crystal socket pins (#432-878) at Y404 and solder them to the foil.
- Install two crystal socket pins (#432-878) at Y403 and solder them to the foil.
- ()) Install two crystal socket pins (#432-878) at Y402 and solder them to the foil.
- (1) Install two crystal socket pins (#432-878) at Y401 and solder them to the foil.
- Install two crystal socket pins (#432-878) at Y405 and solder them to the foil.
- Prepare four 7/8" gray stranded wires.

Install the prepared wires in the following steps.

- (~) 7/8" gray wire.
- 7/8" gray wire.
- (____) 7/8" gray wire.
- 7/8" gray wire.
- Solder the leads to the foil and cut off the excess lead lengths.



Detail 4-2A

CONTINUE

NOTE: When you perform the next step, mount each diode vertically with the banded end up as shown. Be sure to install these diodes at the correct location as shown by the **smaller** circles on the circuit board. Push the body down against the circuit board. Then solder the leads to the foil and cut off the excess lead lengths.




Install four 1N4149 diodes (#56-56) at the following locations:

- (¹) D402.
- (X) D403.
- (/) D404.
- (/) D405.

NOTE: When you install a diode, as in the following steps, position its banded end as shown in the Pictorial. A circuit will not operate properly if the diode is installed backward.



- (/) D407: 1N4002 diode (#57-65).
- (X) D406: 1N4149 diode (#56-56).
- (D401: 1N4149 diode (#56-56).
- (/) Solder the leads to the foil and cut off the excess lead lengths.

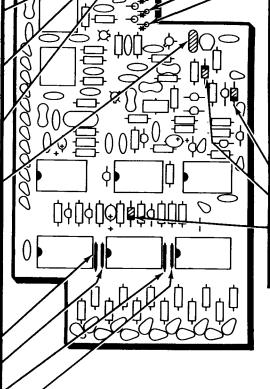

PICTORIAL 4-2




START -

NOTE: To mount a resistor vertically, as in the following step, bend one lead along the side of the resistor body. Then mount the resistor over the circuit board outline and push it down against the circuit board as shown.






- ($\sqrt{\ }$) R437: 2200 Ω (red-red-red).
- \nearrow R439: 2200 Ω (red-red-red).
- f) R442: 2200 Ω (red-red-red).
- (/) R422: 22 k Ω (red-red-orange).
- (/) R425: 100 Ω (brown-black-brown).
- (ij) R419: 10 k Ω (brown-black-orange). NOTE: Your circuit board may be screened 100K.
- Solder the leads to the foil and cut off the excess lead lengths.
- (\bigwedge) R421: 100 k Ω (brown-black-yellow).
- (/) R418: 270 Ω (red-violet-brown).
- (\nearrow) R427: 5600 Ω (green-blue-red).
- (\nearrow) R426: 1000 Ω (brown-black-red).
- (/) R428: 10 k Ω (brown-black-orange).
- Solder the leads to the foil and cut off the excess lead lengths.

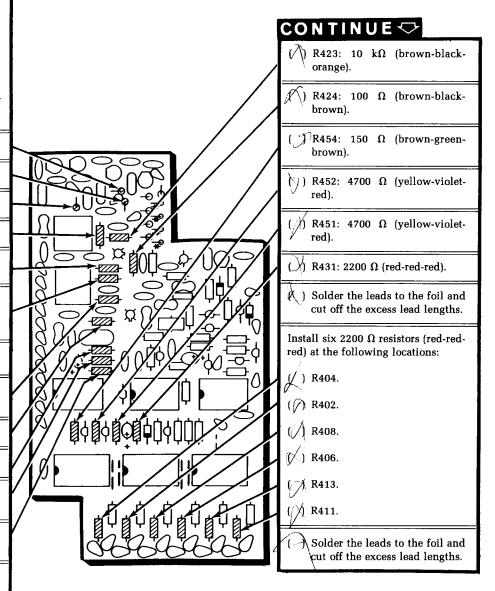


PICTORIAL 4-3

Solder the leads to the foil and cut off the excess lead lengths.

START -		
Install four 100 k Ω resistors (brownblack-yellow) at the following locations:		CONTINUE
7 R434		N) R435: 2200 Ω (red-red-red).
() R436		() R445: 2200 Ω (red-red). NOTE BOARD MAY BE Series and 6800
() R438		($\stackrel{\wedge}{}$) R443: 100 k Ω (brown-black-yellow).
	100000000000000000000000000000000000000	
) R446: 100 Ω (brown-black-brown).		(\int) R459: 4700 Ω (yellow-violet-red).
R447: 820 Ω (gray-red-brown).		() R458: 4700 $Ω$ (yellow-violet-red).
(/) R456: 4700 Ω (yellow-violet-red).) R457: 1000 Ω (brown-black-red).
() R448: 10 kΩ (brown-black- orange).		(T) Solder the leads to the foil and cut off the excess lead lengths.
Solder the leads to the foil and cut off the excess lead lengths.		R453: 2200 Ω (red-red-red).
($\begin{picture}(\begin{picture}(\b$	0101000141999	(Σ R455: 4700 Ω (yellow-violet- red).
() R416: 22 kΩ (red-red-orange).		() R416: 1000 Ω (brown-black-red).
(\nearrow) R432: 4700 Ω (yellow-violet-red).		() R449: 18 k Ω (brown-gray-orange).
Install six 2200 Ω resistors (red-red-red) at the following locations:		Install three 2200 Ω resistors (redred-red) at the following locations: (\) R414.
(N R403		() R429.
(b) R401		(f) R433.
(1) R407		Solder the leads to the foil and cut off the excess lead lengths.
(~) R412		
() R409	PICTORIAL 4-4	

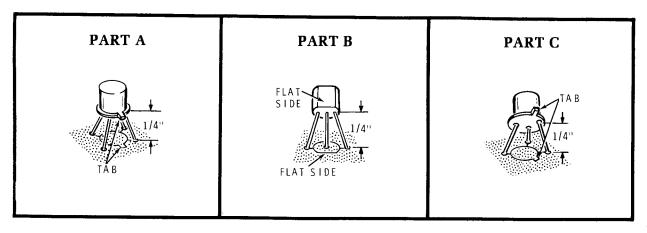


Detail 4-5A

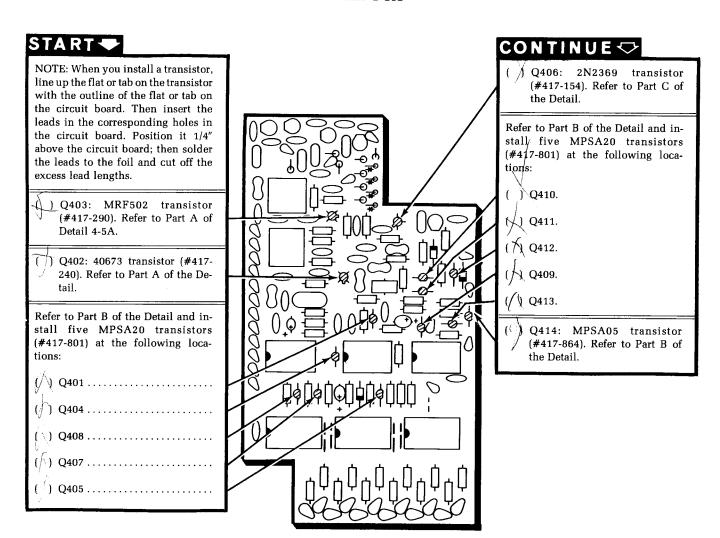

PICTORIAL 4-5



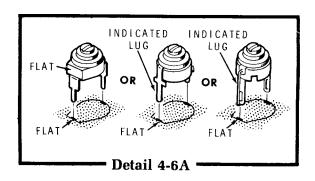

START -

NOTE: The trimmer capacitors that you will install in the following steps, can be supplied in three different styles. Refer to Detail 4-6A and install each trimmer as shown. Be sure to line up the flat on the trimmer or the indicated lug with the outline of the flat on the circuit board. Solder the lugs of each trimmer as you install it and cut off any excess lug lengths.

C432: 3.2-18 pF trimmer (#31-71).

C428: 3.2-18 pF trimmer (#31-

C425: 3.2-18 pF trimmer (#31-71).

C422: 3.2-18 pF trimmer (#31-71).

() C435: 3.2-18 pF trimmer (#31-

NOTE: The IC sockets that you will install in the following steps can be installed either way. Solder the lugs to the foil as you install each socket.

(14-pin IC socket at IC406.

(1) 14-pin IC socket at IC405.

(1) 14-pin IC socket at IC404.


() 16-pin IC socket at IC401.

() 16-pin IC socket at IC402.

() 16-pin IC socket at IC403.


CONTINUE

NOTE: The pin 1 end of inline integrated circuits may be marked in a number of ways; with a notch, triangle, dot, the numeral 1, etc.



Be sure you install each IC so its pin 1 end is toward the index mark on the circuit board.

Before you apply downward pressure to an IC, make sure each pin is centered in its proper socket hole. Handle IC's with care as their pins are very easily bent.



() IC406: MC4044P integrated circuit (#443-62).


) IC405: SN7400N integrated circuit (#443-1).


IC404: SN7473N integrated circuit (#443-5).

(f) IC401: MC4016P integrated circuit (#443-61).


IC402: MC4016P integrated circuit (#443-61).

IC403: MC4016P integrated circuit (#443-61).



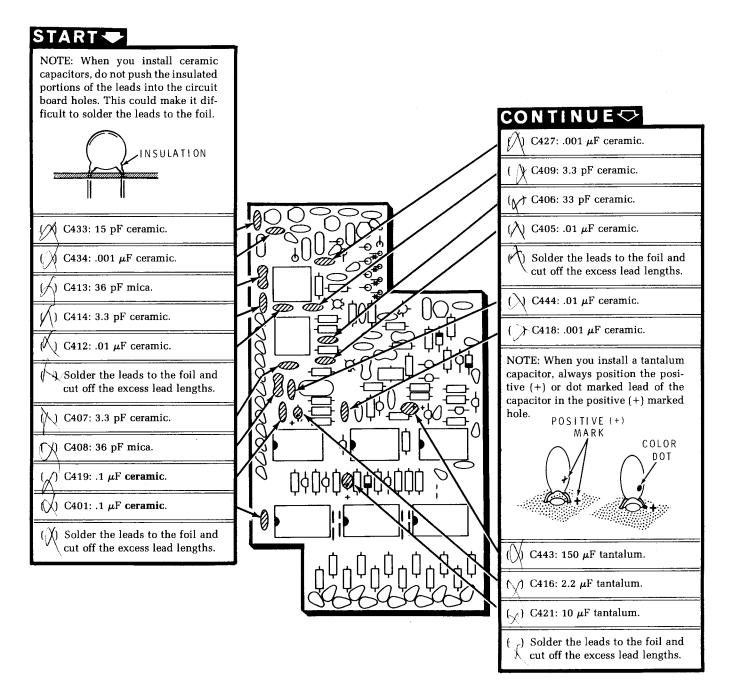

PICTORIAL 4-7

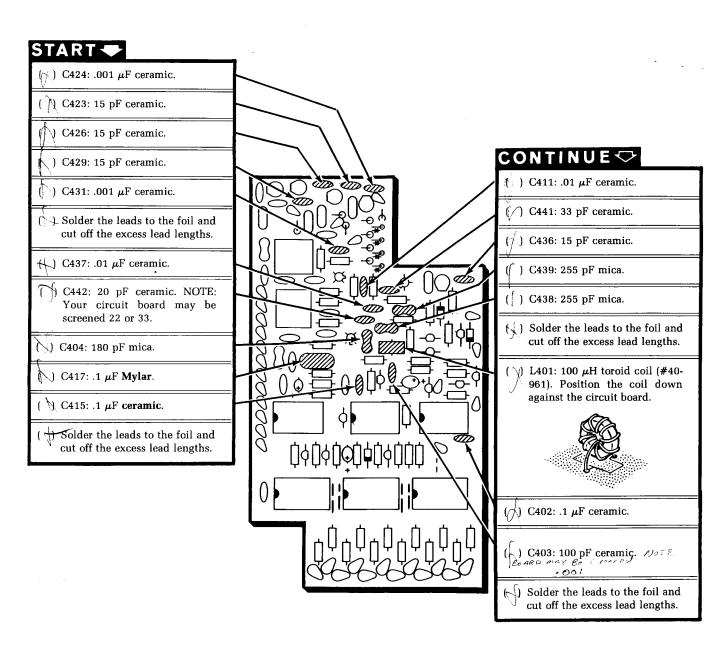



PICTORIAL 4-8

) Y401: 23.2333 MHz crystal (#404-585). (#404-586). (/) Y403: 23.43333 MHz crystal (#404-587). NOTE: The following coils can be installed only one way in the circuit

board. Solder the lugs to the foil and cut off the excess lug lengths as you install them.

- μ L403: .15 μ H coil (#40-1616).
- () L402: .16 μ H coil (#40-1617).
- (\nearrow Form a 3/4" bare wire as shown. Use a cutoff lead. Then push the wire into the wire sockets at J.



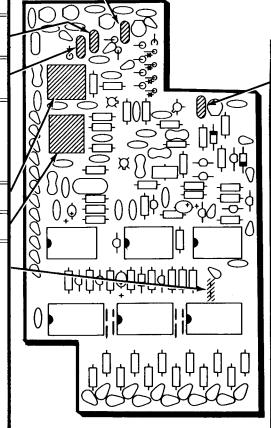

) Y405: 21.55 MHz crystal (#404-584).

CIRCUIT BOARD CHECKOUT


Carefully inspect the foil side of the circuit board for the following most commonly made errors.

- () Unsoldered connections (at leads that have foil).
- (Cold" solder connections.
- (Solder bridges between foil patterns.
- (/) Protruding leads which could touch together.

Refer to the illustrations where the parts were installed as you make the following visual checks.


- () Transistors for proper type and installation.
- () Integrated circuits for the proper type and installation.
- () Electrolytic capacitors for the correct position of the positive (+) mark.
- () Diodes for the correct type and position of the banded end.

PICTORIAL 4-9






INSTALLATION

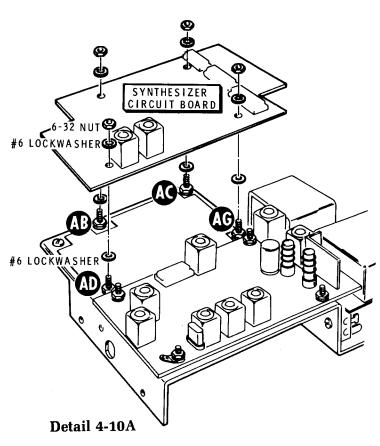

Refer to Pictorial 4-10 (Illustration Booklet, Page 8) for the following steps.

- Refer to Detail 4-10A and mount the synthesizer circuit board to the chassis. Use two #6 lockwashers and a 6-32 nut at AB, AC, AD, and AG.
- Refer to Detail 4-10B and prepare a 4-1/2" shielded cable.

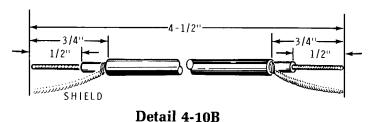

Install ferrite beads and PCB connectors on the inner wire at each end of the prepared cable.

Install only PCB connectors on the shield wire at each end of the prepared cable. Be sure to use a 1/2" length of small sleeving on the shield lead.

(Cut four 5/8" lengths of medium (heat shrinkable) sleeving.

Install a 5/8" length of sleeving on each PCB connector on the ends of the shielded cable.

Connect one end of the prepared cable to the receiver circuit board as follows:

($\sqrt{}$) Inner wire to pin C.

Shield wire to pin D.

Connect the other end of the cable to the synthesizer circuit board as follows:

) Inner wire to pin A.

Shield wire to pin B.

Connect the free end of the shielded cable coming from the VCO assembly to the synthesizer circuit board as follows:


() Inner wire to pin C.

() Shield wire to pin D.

NOTE: When you connect wires to the edge of the synthesizer circuit board, as in the following steps, support the edge of the board to prevent the board from breaking.

Connect some of the wires coming from the lever switch assembly to the synthesizer circuit board as follows:

Gray wire from SW3 to pin A8.

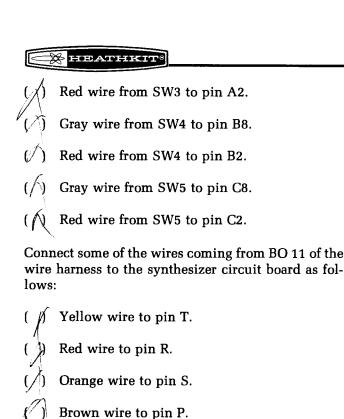

Connect the wires coming from BO 12 of the wire harness to the synthesizer circuit board as follows:

Gray wire to pin W.

(1) White-black wire to pin V.

(2) White wire to pin U.

Black wire to pin N.


Refer to Pictorial 4-11 for the following steps.

Connect the remaining wires coming from the lever switch assembly to the synthesizer circuit board as follows:

Yellow wire from SW3 to pin A4.

Brown wire from SW3 to pin A1.

Yellow wire from SW4 to pin B4.



(/) Yellow wire from SW5 to pin C4.

(Brown wire from SW5 to pin C1.


() Prepare a 4-1/2" small red wire.

Install a PCB connector on one end of the 4-1/2" red wire.

Cut a 5/8" length of medium (heat shrinkable) sleeving and install it on the PCB connector on the red wire.

Connect the free end of the red wire to switch SW6 lug 1 (S-1). Connect the other end to pin X on the synthesizer circuit board.

Connect the wires coming from BO 10 of the wire harness to the synthesizer circuit board as follows:



Connect the wires coming from BO 9 of the wire harness to the synthesizer circuit board as follows:

() Blue cable inner lead to pin G.

(Blue cable shield lead to pin H.

() Orange cable inner lead to pin K.

(Orange cable shield lead to pin L.

() Position the wire harness down against the receiver circuit board and route the wires as shown.

Set the chassis aside until it is called for in a step.





TRANSMITTER CIRCUIT BOARD

PARTS LIST

- () Refer to the Pack Index Sheet and locate Pack
- () Unpack these parts and check each part against the following list. The key numbers correspond to the numbers on the "Transmitter Circuit Board Parts Pictorial" (Illustration Booklet, Page 9).

To order a replacement part, always include the

KEY	HEATH	QTY. DESCRIPTION	CIRCUIT
No.	Part No.		Comp. No.

RESISTORS

NOTES:

- 1. Resistors may be packed in more than one envelope. Open all of the resistor envelopes in this pack before you check them against the following list.
- 2. The following resistors have a tolerance of 5%. 5% is indicated by a gold fourth band.

1/4-Watt

A1	6-100-12	γ ΄1	10 Ω (brown-black-black)	R109
A1	6-330-12	√2	33 Ω (orange-orange-black)	R101, R104
A 1	6-820-12	* 1	82 Ω (gray-red-black)	R106
A 1	6-101-12	. 3	100 Ω (brow-black- brown)	R103, R116, R131
A1	6-151-12	1	150 Ω (brown-green- brown)	R137
A 1	6-681-12	2	680 Ω (blue-gray-brown)	R136, R138
A1	6-222-12	5 1	2200 Ω (red-red-red)	R111
A1	6-472-12	2	4700 Ω (yellow-violet-red)	R112, R117
A1	6-103-12	⅓ 3	10 kΩ (brown-black- orange)	R108, R114, R115

PART NUMBER. Use the Parts Order Form furnished with this kit. If one is not available, see "Replacement Parts" inside the rear cover of this Manual. For price information, refer to the separate "Heath Parts Price List."

KEY HEATH QT No. Part No.		QT	Y. DESCRIPTION	CIRCUIT Comp. No.				
Resistors (cont'd.)								
A1	6-153-12	/4	15 kΩ (brown-green- orange)	R102, R121,				
A 1	6-223-12	12	22 k Ω (red-red-orange)	R122, R123				
A1	6-273-12	V 1	27 k Ω (red-violet-orange)	R124, R135				
A1	6-104-12	/2		R105				
Λ.	0-104-12		100 k Ω (brown-black-yellow)	R132, R133				
A 1	6-124-12	/ 2	120 k Ω (brown-red-yellow)	R113, R118				
A1	6-474-12	ر 1	470 k Ω (yellow-violet-yellow)	R134				
1/2-	-Watt							
A 2	6-510	1	51 Ω (green-brown-black)	R139				
A2	6-181	J 1	180 Ω (brown-gray-	R141				
			brown)					
A 2	6-332	^u 1	3300 Ω (orange-orange-red)	R129				
A 2	6-273	11	27 kΩ (red-violet-orange)	R128				



KEY HEATH QTY. DE No. Part No.		QTY.	DESCRIPTION	CIRCUIT Comp. No.	KEY HEATH QTY. DESCRIPTION No. Part No.		CIRCUIT Comp. No.		
CAPACITORS						INDUCTORS			
Ceramic				C1	40-1633	> ₁	.07 μH coil (blue)	L107	
B1 B1 B1 B1	21-33 21-168 21-61 21-3 21-111	11 12 12 12 12 22	3.3 pF 4.7 pF 6.8 pF 10 pF 15 pF	C114 C121 C101, C119 C115, C143 C107, C109	C1 C1 C2 C3 C4	40-1632 40-1631 40-1630 45-85 475-10	× 2 × 2 × 2 × 2 × 2 × 2 × 2 × 2 × 2 × 2	.104 μH coil (yellow) .25 μH coil (red) .975 μH coil (clear) .16 mH choke 1.07 μH ferrite bead	L105, L106 L103, L104 L101, L102 L108 FB101, FB102
B1 B1 B1 B1	21-167 21-147 21-85 21-17	√2 √4	39 pF 47 pF 56 pF 270 pF	C122 C102, C103 C125 C116, C127, C156, C157	DIC	DES			
B1	21-163	× 7	.001 μF	C111, C113, C118, C124, C133, C134, C135	D1 0	56-57 57-27 56-56	1 1 1	1N716A 1N2071 1N4149	ZD101 D102 D101
B1	21-176	<i>X</i> 11	.01 μF	C104, C105, C106, C112, C117, C126, C128, C131, C138, C141, C142	(IC	s)		- INTEGRATED CIRC	
B1	21-143	V8	.05 μF	C136, C151, C153				the following four ways:	s marked for
B1	21-95	/ 2	.1 μF	C149, C154			numbe	r. er. (On integrated circuits umbers; the letters may be	
Ele	ctrolytic	;			missing.) 3. Part number and type number.				
B2 B2 B3 B3	25-200 25-220 25-145 25-241	/2 ×1 ×1 ×1	.68 μ F (tantalum) 10 μ F (tantalum) 25 μ F 1200 μ F	C139, C145 C129 C155 C152	E1 E2	4. Part listed 417-290 417-293	number I. X1	and a type number other t MRF502 transistor 2N5770 transistor	Q101 Q102
Oth	ner				E3 E4 E5	417-205 417-175 442-21		2N3866 transistor 2N5294 transistor MC1458 or NE5558V IC	Q103 Q104 IC101
B4	27-129	71	.047 μ F Mylar	C132	E 5	442-53	Χì	NE555V IC	IC102
B4	27-77	Δ_{l}^{1}	.1 μF Mylar	C137	E6	443-1	×1	SN7400N IC	IC103
B5	28-3	(/1 	.56 pF phenolic (green- blue-gray-silver)	C123	E 6	443-7	∕∕3	SN7490N IC	IC104 IC105
B 5	28-2	.∕∖3	1 pF phenolic (brown- black-white-silver)	C108, C146, C148	Ee	112.24	17	SN7400N IC	IC106
В6	31-57	¥°2	2.7-20 pF trimmer	C144, C147	E6 E7	443-34 442-54	ki	SN7492N IC UA7805 IC	IC107 IC1



KEY No.	HEATH Part No.	QTY.	DESCRIPTION	CIRCUIT Comp. No.	KEY No.	HEATH Part No.	QTY	. DESCRIPTION	CIRCUIT Comp. No.
СО	NNECTO	₹ — \$	SOCKETS		MISCELLANEOUS				
F1 F2 F3 F4 F5 F6 F7	432-121 432-772 432-865 432-866 434-230 434-298 432-790 432-73	129 4 0 3 12 15 1	Small PCB pin (2 extra) Large PCB pin Connector housing Connector pin 8-pin IC socket 14-pin IC socket Plastic sleeve Female terminal		H1 H2 H3 H4 H5 H6	10-312 10-353 75-159 75-704 434-146 421-32	~1 ~3 ~1 ~1 ~1	10 k Ω control 100 k Ω control Transistor spacer Transistor insulator (packed between two pieces of cardboard.) Phono jack 5-ampere, 3AG fuse	R119 R125, R126, R127 J101, J102 F1
HARDWARE				H7 H8	75-24 404-426	1	Strain relief 10 MHz crystal	Y101	
G1 G2 G3 G4 G5 G6 G7	250-213 250-52 252-2 252-15 254-9 252-3 254-1 259-1	2 5 9 2	$4-40 \times 5/16''$ screw $4-40 \times 1/4''$ screw Large 4-40 nut Small 4-40 nut #4 lockwasher 6-32 nut #6 lockwasher #6 solder lug		PAF J1	R TS FRO 85-1879-7 490-1	M TH 1 1	E MAIN PACK Transmitter circuit board Alignment tool	




STEP-BY-STEP ASSEMBLY

START -


) Position the transmitter circuit board as shown. Then complete the steps in the following Pictorials.

NOTE: There are 27 locations on this circuit board where you will install small PCB (printed circuit board) pins. Sixteen of these locations are marked with a letter; A, B, C, etc.; eight locations are marked TP101 through TP108 and three locations are marked IN, OUT, and GND. Insert all of the pins from the lettered side of the board. Then turn the board over and solder the pins to the foil.

Install small PCB pins (#432-121) at the 27 locations shown in this Pictorial. Be sure each pin is straight and pressed in until the stop ridge is against the circuit board. Do not install pins at G, P, R, or V at this time.




Carefully solder PCB pins B, L, and N to the foil on top of the circuit board. Keep the solder down toward the bottom part of the pins as much as possible. Connectors will be installed on these pins later.

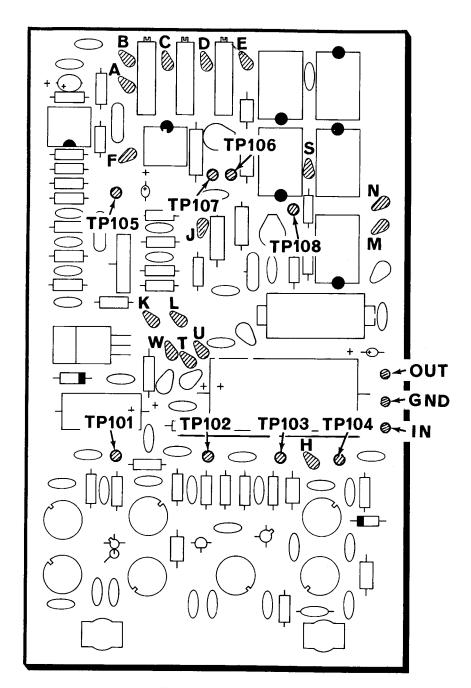


PICTORIAL 5-1


START IMPORTANT: THE BANDED END OF DIODES CAN) Position the transmitter circuit BE MARKED IN A NUMBER OF WAYS. board as shown. Then perform the steps in the following Pictorials. () R115: 10 k Ω (brown-blackorange). () R117: 4700 Ω (yellow-violet-BANDED END CONTINU ($\sqrt{\ }$) R112: 4700 Ω (yellow-violet-Detail 5-2A () R114: 10 k Ω (brown-blackred). orange).) R113: 120 k Ω (brown-red-() R118: 120 k Ω (brown-redyellow). yellow). () R132: 100 k Ω (brown-black-($^{\frac{1}{1}}$) R116: 100 Ω (brown-blackyellow). brown). R133: 100 kΩ (brown-black-() R121: 15 k Ω (brown-greenyellow). orange). ($^{\prime}$) R134: 470 k Ω (yellow-violet-() R122: 15 k Ω (brown-greenyellow). orange).) R135: 22 k Ω (red-red-orange). () Solder the leads to the foil and cut off the excess lead lengths. () R141: 180 Ω, 1/2-watt (brown-($^{\uparrow}$) R123: 15 k Ω (brown-greengray-brown). orange). () Solder the leads to the foil and () R124: 22 k Ω (red-red-orange). cut off the excess lead lengths. NOTE: When you install a diode, al-(Λ) R101: 33 Ω (orange-orangeways match the band on the diode black). with the band mark on the circuit board. A DIODE WILL NOT WORK IF (\)' R106: 82 Ω (gray-red-black). INSTALLED BACKWARDS. See Detail 5-2A.) R105: 27 k Ω (red-violet-orange). BANDED) R104: 33 Ω (orange-orange-END black). () R109: 10 Ω (brown-black-black).) R108: 10 k Ω (brown-blackorange). (\) ZD101: 1N716A diode (#56-57).) Solder the leads to the foil and () D102: 1N2071 diode (#57-27). cut off the excess lead lengths. () R103: 100 Ω (brown-blackbrown)) R102: 15 k Ω (brown-greenorange).) Solder the leads to the foil and cut off the excess lead lengths. PICTORIAL 5-2



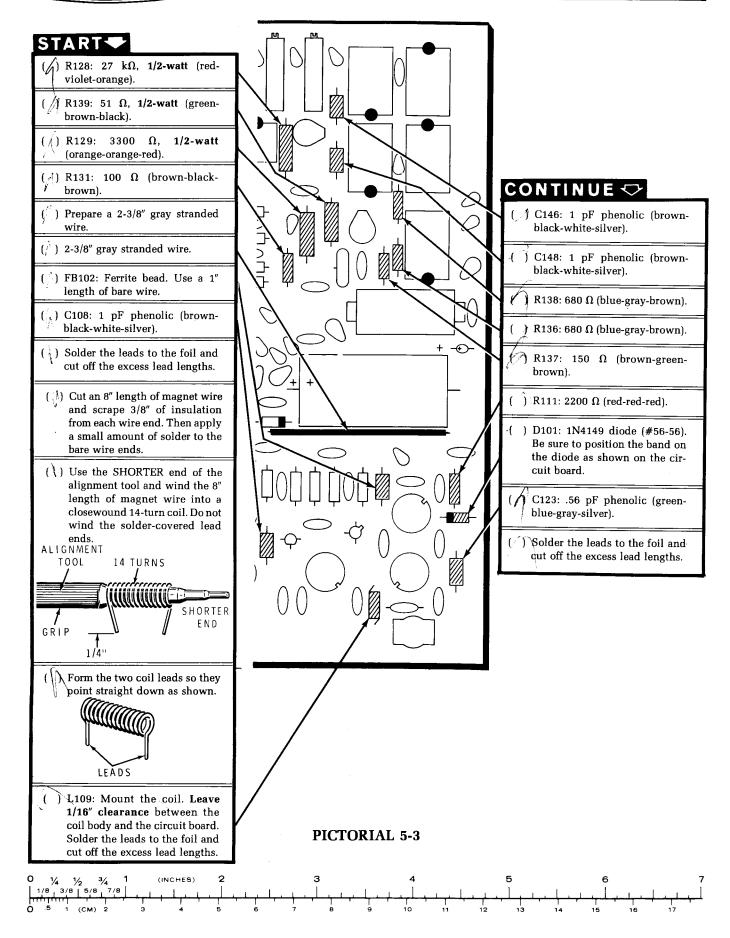

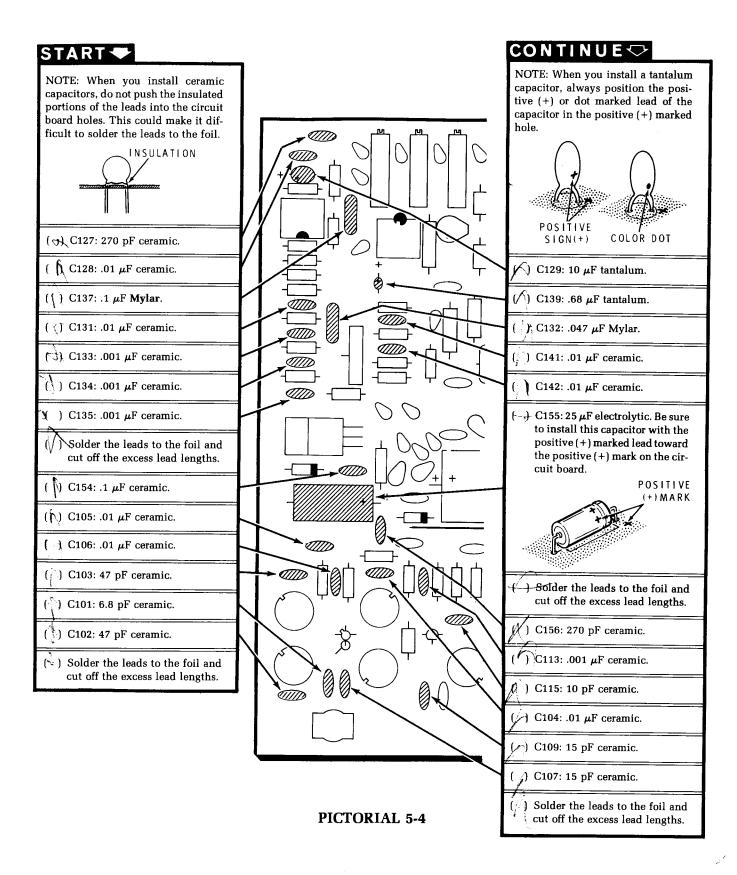



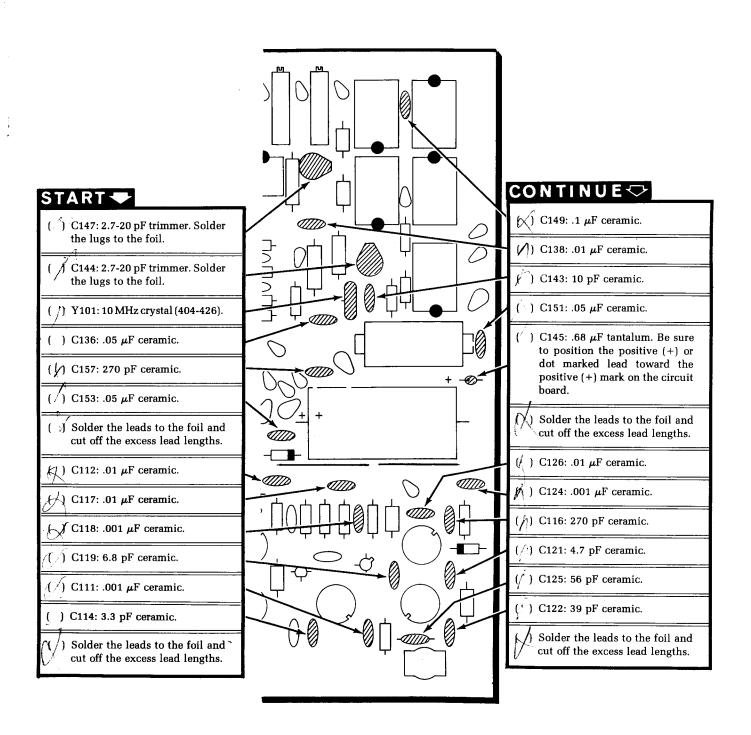


PICTORIAL 5-5




NOTE: To avoid possible damage to the transistor in the following steps, DO NOT bend or spread the broad portion of the leads. To fit the transistor to the circuit board you must bend and spread ONLY the narrow portion of the leads.

Q104: Install a 2N5294 transistor (#417-175) as follows:

- Hold the wide part of the transistor leads with long-nose pliers to prevent any bending where the leads enter the transistor body. Then bend the narrow part of the leads straight down as shown.
- 2. Mount the transistor with $4\text{-}40 \times 1/4''$ hardware and a transistor insulator as shown. Place the insulator between the transistor and the circuit board. Do not let the transistor twist when you tighten the hardware.
- Turn the circuit board over, solder the leads to the foil, and cut off the excess lead lengths.

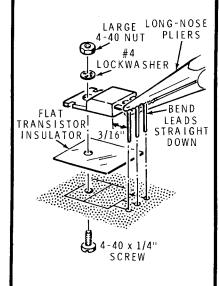


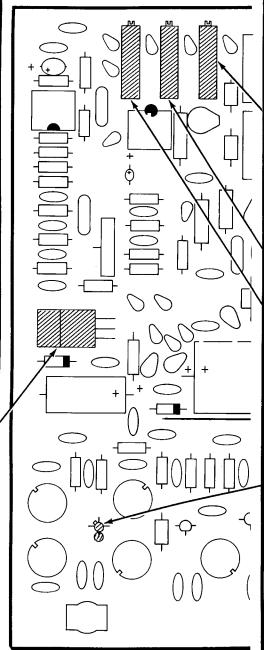

PICTORIAL 5-6

CONTINUE


R127: 100 kΩ control. Position the screw end as shown; then mount the control on the circuit board. Press the control firmly against the circuit board. Solder the lugs to the foil and cut off the excess lug lengths.



- \Re R126: 100 k Ω control. Solder the lugs to the foil and cut off the excess lug lengths.
- \bigcap R125: 100 k Ω control. Solder the lugs to the foil and cut off the excess lug lengths.


NOTE: The ferrite bead that you will install on a transistor lead in the next step may touch other leads on the transistor. This will not affect the operation of the transistor.


Q101/FB101: Refer to the illustration below and slide a 1.07 µH ferrite bead onto the base (B) lead of an MRF502 transistor (#417-290). Then line up the tab on the transistor with the outline of the tab on the circuit board and insert the leads into their corresponding holes in your circuit board. Solder the leads to the foil and cut off the excess lead lengths.



NOTE: The IC sockets that you will install in the next two steps may be installed either way in the circuit board.


- 8-pin IC socket at IC101. Solder the pins to the foil.
- 8-pin IC socket at IC102. Solder the pins to the foil.
- [R119: 10 kΩ control. Push the control down firmly against the circuit board. Then solder the lugs to the foil.
- (*) Q102: 2N5770 transistor (#417-293). First bend the center lead toward the flat side of the transistor. Then line up the flat on the transistor with the outline of the flat on the circuit board and insert the leads into their corresponding holes. Solder the leads to the foil and cut off the excess lead lengths.



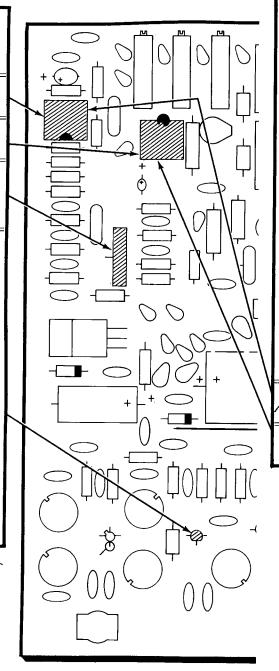


CONTINUE

NOTE: The pin 1 end of inline integrated circuits may be marked in a number of ways; with a notch, triangle, dot, the numeral 1, etc.



Be sure you install each IC so its pin 1 end is toward the index mark on the circuit board.

Before you apply downward pressure to an IC, make sure each pin is centered in its proper socket hole. Handle IC's with care as their pins are very easily bent.




- (A) IC101: MC1458 integrated circuit (#442-21).
- (K) IC102: NE555 integrated circuit (#442-53).


PICTORIAL 5-7



- 14-pin IC socket at IC105. Solder the pins to the foil.
- () IC105: SN7490N integrated circuit (#443-7). Be sure to match the pin 1 end of the IC with the index mark on the circuit board.
- (f) 14-pin IC socket at IC104. Solder the pins to the foil.
- () IC104: SN7490N integrated circuit (#443-7).
- Large PCB pin at P. Solder the pin to the foil.
-) Large PCB pin at V. Solder the pin to the foil.
- () Large PCB pin at R. Solder the pin to the foil.

#417-205). First place a transistor (#417-205). First place a transistor spacer on the leads. Then line up the tab on the transistor with the outline of the tab on the circuit board and insert the leads into their corresponding holes in the circuit board. Push the transistor and spacer down firmly against the circuit board. Then solder the leads to the foil and cut off the excess lead lengths.



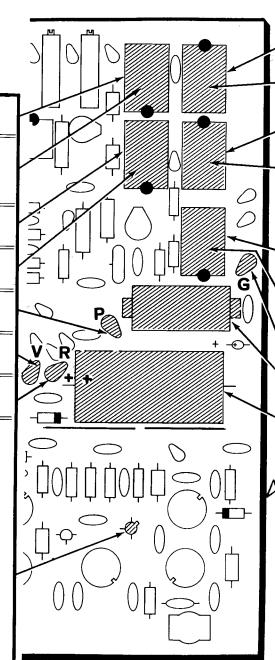


CONTINUE

- () 14-pin IC socket at IC106. Solder the pins to the foil.
- IC106: SN7490N integrated circuit (#443-7).
- 14-pin IC socket at IC107. Solder the pins to the foil.
- (1) IC107: SN7492N integrated circuit (#443-34).


NOTE: Be sure to install the next socket in the holes closest to IC107.

- 14-pin IC socket at IC103. Solder the pins to the foil.
- () IC103: SN7400N integrated circuit (#443-1).
- Large PCB pin at G. Solder the pin to the foil.
- (√) L108: .16 mH choke (#45-85).
- C152: 1200 μF electrolytic. Be sure to position the positive (+) marked lead toward the positive (+) mark on the circuit board.
- Solder the leads to the foil and cut off the excess lead lengths.

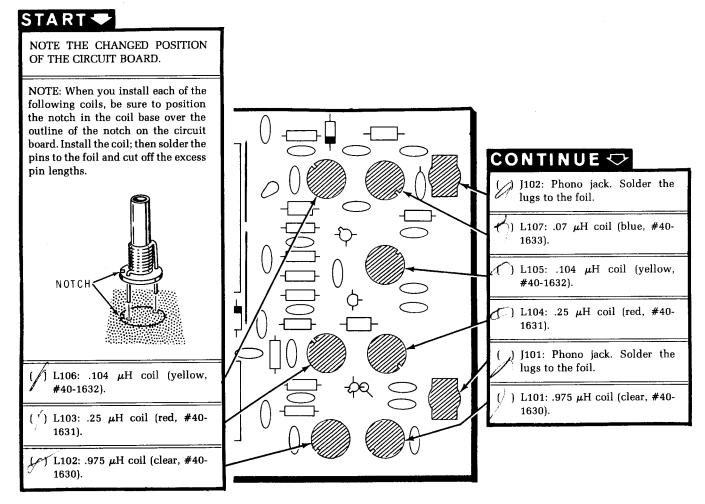


PICTORIAL 5-9

- Cut 3" lengths (one each) of small red, brown, and yellow stranded wire.
- () Remove 1/8" of insulation from one end and 1/4" of insulation from the other end of each wire.
- () Twist together the strands and apply a small amount of solder to the wire ends to hold the strands together.
- Refer to the following drawing and install a connector pin (#432-866) on the 1/8" end of each wire as shown.




NOTE: When you perform the following step, be sure to position the connector housing and connector pins as shown before you insert the pins into the housing. Push in on the wire until the pin snaps into place.

Refer to the following drawing and insert the connector pin on the red wire into hole 1 of the connector housing.



) In a like manner, insert the brown and yellow wires into the indicated holes in the connector housing.

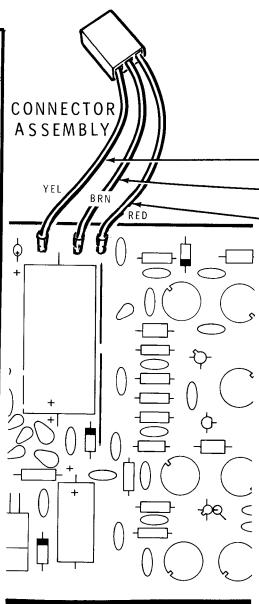

PICTORIAL 5-10

CONTINUE

Connect the wires of the connector assembly as follows. Solder each wire into the top of the pin as you connect it.

- (Yellow to OUT.
- () Brown to GND.
- (Red to IN.

CIRCUIT BOARD CHECKOUT

Carefully inspect the foil side of the circuit board for the following most commonly made errors.


-) Unsoldered connections at leads that have foil.
- () "Cold" solder connections.
- () Solder bridges between foil pat-
- () Protruding leads which could touch together.

Refer to the illustrations where the parts were installed as you make the following visual checks.

- () Transistors for proper type and installation.
- () Integrated circuits for the proper type and installation.
- Electrolytic capacitors for the correct position of the positive (+) mark.
- Diodes for the correct type and position of the banded end.



INSTALLATION

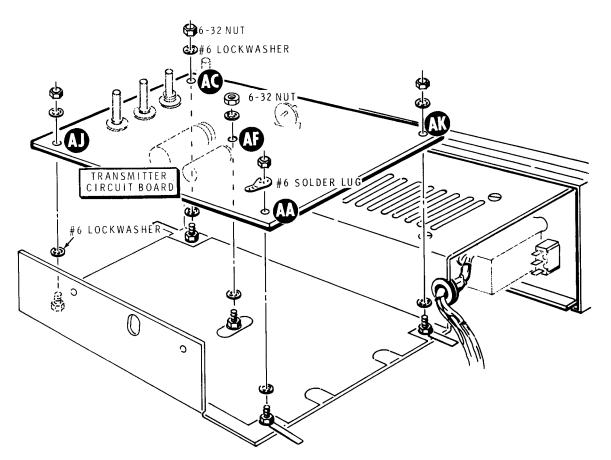


Detail 5-11A

Refer to Pictorial 5-11 (Illustration Booklet, Page 10) for the following steps.

() Refer to Detail 5-11A and mount the transmitter circuit board on the chassis. Use two #6 lockwashers and a 6-32 nut on each stud or screw at AC, AF, AJ, and AK. Use one #6 lockwasher, a #6 solder lug, and a 6-32 nut at AA. Position the solder lug as shown in the Pictorial. Make sure all of the harness wires are

above the circuit board.

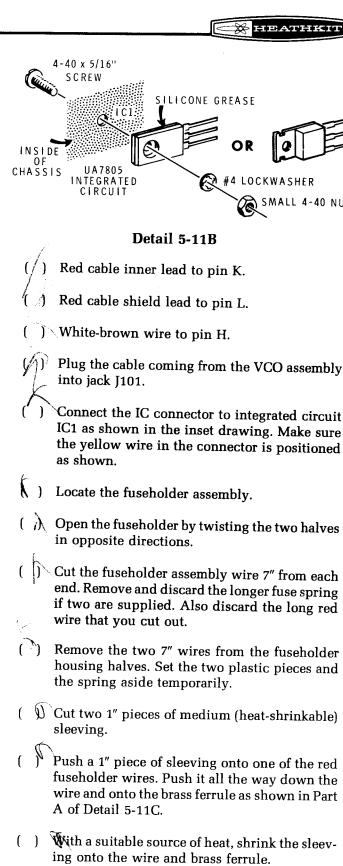

Push this prepared wire through one of the


fuseholder halves and pull it all the way until the sleeving emerges from the wire hole. Set

this fuseholder half aside temporarily.

Refer to the inset drawing on the Pictorial and cut open the silicone grease pod. Place a small amount of silicone grease on the metal side of UA7805 integrated circuit (#442-54). Save the remaining silicone grease for use later. (cf) IC1: Refer to Detail 5-11B and mount the UA7805 integrated circuit (#442-54) at IC1 with a $4-40 \times 5/16$ " screw, a #4 lockwasher, and a small 4-40 nut. Be sure to mount the integrated circuit with the metal side toward the chassis. Then position the integrated circuit as shown. Connect the wires coming from BO 4 of the wire harness to the transmitter circuit board as follows: White-black wire to pin F. White-brown wire to pin C. White-red wire to pin D. White-orange wire to pin E. Green cable inner lead to pin A. Green cable shield lead to pin B. Connect the wires coming from BO 2 of the wire harness to the transmitter circuit board as follows: (White-black wire to pin J. () Slide two ferrite beads over the end of the red wire. Then connect the end of the wire to pin OUT. Wrap the end of the wire around the top of the pin and solder the connection. Orange cable inner lead to pin M. Orange cable shield lead to pin N. Connect the wires coming from BO 1 of the wire harness to the transmitter circuit board as follows: Any of the three white-orange wires to pin U. Either remaining white-orange wire to pin T. Remaining white-orange wire to pin W. Red wire to pin P.

Either orange wire to pin R.

Other orange wire to pin V.

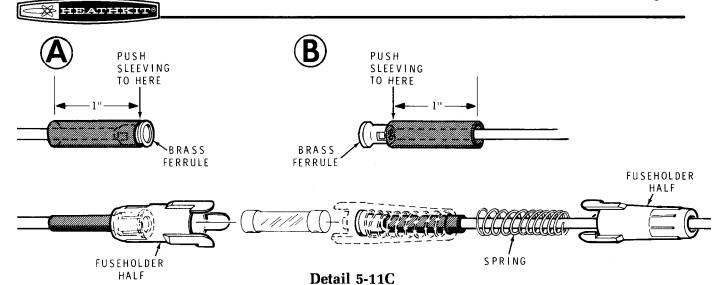

Refer to Part B of Detail 5-11C and place another 1" piece of medium (heal-shrinkable) sleeving onto the remaining 7" fuseholder wire. Slide the sleeving down until it just touches the brass ferrule.

Shrink this sleeving just a little; then push it against the brass ferrule again. Finish shrinking the sleeving onto the wire.

Place the fuseholder spring onto the end of the wire; then pull the wire through the remaining half of the fuseholder until the sleeving emerges from the wire hole.

Prepare the free end of each fuseholder assembly wire.

Install a 5-ampere, 3AG fuse and twist the two fuseholder halves together.

Cut a 2" length of large sleeving. Then slide this length of sleeving over either fuseholder assembly wire and against the assembly.

Refer to Detail 5-11D and solder a female connector to the end of the fuseholder wire that has the sleeving. Then push a plastic sleeve onto the connector. Be sure to position the raised areas on the sleeve as shown.

Route the fuseholder assembly wire (that has the connector) through hole AY in the chassis and push it onto pin G on the transmitter circuit board.

(/) Prepare a 16" large black stranded wire.

Refer to Detail 5-11E (Illustration Booklet, Page 10) and install a #6 solder lug on one end of this 16" wire. Use the outside hole in the solder lug, and solder the wire to the lug. Do not block the inner hole with solder. It will be used later.


Route the other end of this wire through hole AY and through the large sleeving on the red fuseholder wire.

() Stide the sleeving along the wires toward the chassis until the distance between the chassis and the indicated end of the sleeving is 1". Be sure the solder lug on the black wire will reach hole DA.

NOTE: The large sleeving on the black wire and red fuseholder assembly wire is heat shrinkable, the same type as the medium sleeving you installed on PCB connectors earlier. In the next step, use the procedure you used with the medium sleeving on the PCB connectors.

Using a match or lighter, shrink the large sleeving around the black wire and red fuseholder assembly wire.



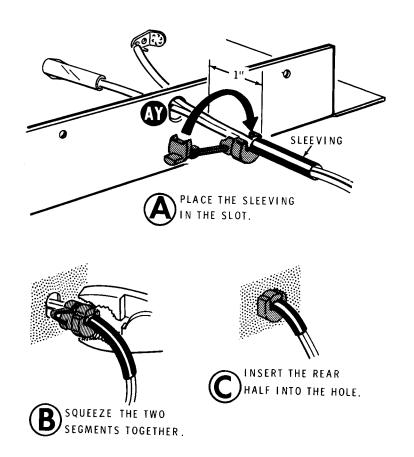

Detail 5-11F

()) Refer to Detail 5-11F and install a strain relief on the sleeved red and black wires at hole AY.

NOTE: The blue and white label shows the Model Number and Production Series Number of your kit. Refer to these numbers in any communications with the Heath Company about your kit. This assures you that you will receive the most complete and up-to-date information in return.

Carefully peel the backing paper from the blue and white label. Then press the label onto the bottom of the chassis in the location shown.

Refer to Pictorial 5-12 for the following steps.

() Refer to Detail 5-12A and cut off the "ears" from the female connector housing.

If the red fuseholder wire is not the same length as the large black stranded wire, cut the longer wire so the lengths are the same.

Install large male connectors on the free ends of the red fuseholder assembly wire and the large black stranded wire as shown in the Pictorial.


) Position the female connector housing as shown and push the male connector on the end of the red fuseholder wire into hole 3 of the housing until the connector locks in place.


In the same way, push the male connector on the end of the large black wire into hole 1 of the housing.

NOTE: An extractor tool is furnished (see Detail 5-12B) so you can remove a pin from one of the connector housings, should it become necessary. To use the tool, push it very firmly over the end of the pin, as shown, until it compresses the expanded ears of the pin. When this occurs, the wire with its pin can be pulled from the other end of the housing.

Set the chassis aside until it is called for in a step.



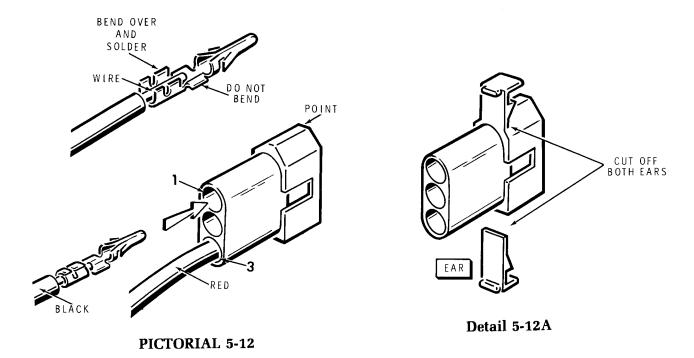

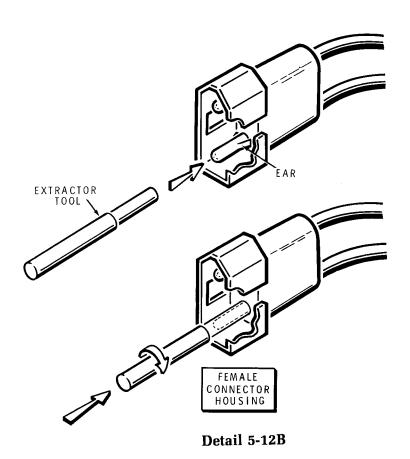



POWER AMPLIFIER CIRCUIT BOARD

PARTS LIST

- () Refer to the Pack Index Sheet and locate Pack #5.
- () Unpack these parts and check each part against the following list. The key numbers correspond to the numbers on the "Power Amplifier Circuit Board Parts Pictorial" (Illustration Booklet, Page 11).

To order a replacement part, always include the List."

KEY HEATH No. Part No.	QTY. DESCRIPTION	CIRCUIT Comp. No.
		<u>Comp. 140.</u>

RESISTORS, 1/4-Watt

NOTE: The following resistors have a tolerance of 5%. 5% is indicated by a gold fourth band.

A 1	6-100-12	ા	10 Ω (brown-black-black)	R301
A 1	6-104-12	M	100 kΩ (brown-black-	R302
		•	yellow)	

CAPACITORS

Ceramic

B1	21-169	1/2	6 pF	C311, C313
B 1	21-3	<i>≱</i> 1	10 pF	C312
B1	21-9	1	100 pF	C309
B1	21-11	The	150 pF	C306
В1	21-17	12	270 pF	C314, C316
				C317, C318,
				C319, C321
				C322, C323,
				C324
B1	21-154	91	.0051 μF (5100 pF)	C304

PART NUMBER. Use the Parts Order Form furnished with this kit. If one is not available, see "Replacement Parts" inside the rear cover of this Manual. For price information, refer to the separate "Heath Parts Price

No.	Part No.	QT\ 	/. DESCRIPTION	CIRCUIT Comp. No.				
Capacitors (cont'd.)								
Electrolytic								
B2	25-220	gr	10 μF (tantalum)	C307				
Oth	er							
В3	20-130	t 1	12 pF mica	C325				
B4	28-3	1	.56 pF phenolic (green- blue-gray-silver)	C315				
B 5	31-54	1	4-40 pF trimmer	C302				
B5	31-52	₹4	8-60 pF trimmer	C301, C303,				
				C305, C308				
DIODE — TRANSISTORS								
C1	56-56	<u>'</u> T1	1N4149 diode	D301				
C2	417-804	71	2N6080 or CTC B3-12 transistor	Q301				
C2	417-803	\bigvee_1	2N6081 or CTC B12-12	Q302				

transistor



KEY HEATH No. Part No. QTY. DESCRIPTION

CIRCUIT Comp. No. KEY HEATH QTY. DESCRIPTION No. Part No.

CIRCUIT Comp. No.

HARDWARE

Hardware packets are marked to show the size of the hardware they contain (HDW#4, HDW #6, etc.). You may have to open more than one packet in this pack to locate all of the hardware of any one (#6, for example) size.

#4 Hardware

D1 250-321

4-40 × 1/8" screw 3

D2 250-163 $4-40 \times 5/16''$ self-tapping screw

3

#6 Hardware

D3 250-56 D4 250-587 D5 250-298

6-32 × 1/4" screw 2 6-32 × 5/16" screw

6-32 × 3/4" hex head self-tapping screw

D6 250-1157 10 $6-32 \times 1/4$ " stud

D7 252-3 D8 254-1

8 6-32 nut 15 #6 lockwasher

2

D9 252-22

2 6-32 push-on nut

D10 259-1 #6 solder lug

#8 Hardware

D11 252-4

8-32 nut

D12 252-181

8-32 shoulder nut

CONNECTORS

E1 432-120 F2

E6

E7

432-121

E3 432-855 E4 432-184 E5 434-174

438-4

438-46

PCB connector Small PCB pin Female connector

9-pin receptacle

P301

J301/J302

Dual phono socket

Phono plug

Phono plug, 3/8" tip

MISCELLANEOUS

× 2 .295 μH choke

RFC301, RFC302

60-80 F2 F3 69-72

F1

45-38

 K_1 Slide switch <u>~</u>1 Relay

1.07 µH ferrite bead

F4 475-10 16 F5 204-2275 Angle bracket F6 431-40

F7 475-17 490-168 Terminal strip Toroidal core $1/4^{\prime\prime}\,\times\,5/16^{\prime\prime}$ end wrench K301 FB301-FB316

SW301

PARTS FROM THE MAIN PACK

85-1661-2

Power amplifier circuit board

203-1466 205-1425-1

Rear panel Panel plate



STEP-BY-STEP ASSEMBLY

START

NOTES


- To avoid confusion when you mount and solder parts, each identification drawing indicates when the component (printed) side or foil side of the circuit board is shown.
- Most of the holes in this circuit board are "plated through" from one side to the other. Be careful. Do not allow solder to run into any hole other than the intended hole.
- Position the power amplifier circuit board component (printed) side up with the notch to the left.
- Bend the terminals of the five mica trimmer capacitors out as shown. Then cut through the center of each terminal lug to shorten the terminal.




NOTES: In the following steps, as you install each trimmer capacitor, solder its terminals to the **foil side** of the circuit board as follows:

- Apply a very thin coating of solder to the foil areas where the terminals will be soldered (on the foil side of the circuit board).
- Solder each terminal to the foil.
 Hold the terminal down against the circuit board with the blade of a screwdriver until the solder cools.

CAUTION: In the Pictorial, the upper plate of each trimmer capacitor is shaded. It is very important that each upper plate be positioned as shown.




COMPONENT SIDE

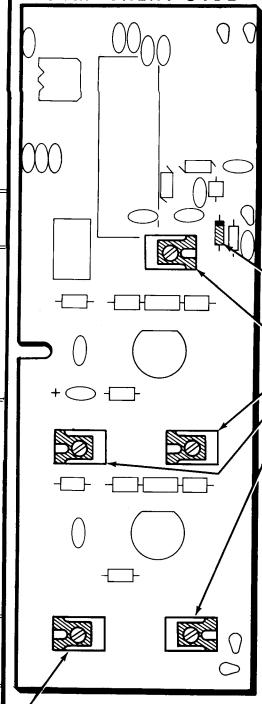

CONTINUE

NOTE: When you install a diode, position its banded end as shown in the Pictorial. A circuit will not operate properly if the diode is installed backward.

IMPORTANT: THE BANDED END OF DIODES CAN BE MARKED IN A NUMBER OF WAYS.




- D301: 1N4149 diode (#56-56).
 Do **not** solder the leads yet.
- C308: 8-60 pF trimmer (#31-52).
 Also solder the leads of diode
 D301 and cut off the excess lead
 lengths.
- (C303: 8-60 pF trimmer (#31-52).
- () C305: 8-60 pF trimmer (#31-52).
- () C301: 8-60 pF trimmer (#31-52).
- Check again and make sure that each trimmer upper plate is positioned as shown.



START

- () Cut two 5" lengths of magnet wire and scrape 3/8" of insulation from each wire end. Then apply a small amount of solder to the bare wire ends.
- () Use the SHORTER end of the alignment tool and wind one 5" length of magnet wire into an 8-turn coil. Do not wind the solder-covered lead ends.




Form the two coil leads so they point straight down as shown.



- It is very important that you have exactly eight turns on the coil you just prepared. Count the number of turns across the top of the coil.
- 1/16" clearance between the coil body and the circuit board. Solder the leads to the foil and cut off the excess lead lengths.
- () Wind another identical coil from the other 5" length of magnet wire.
- 1/16" clearance between the coil body and the circuit board. Solder the leads to the foil and cut off the excess lead lengths.

COMPONENT SIDE

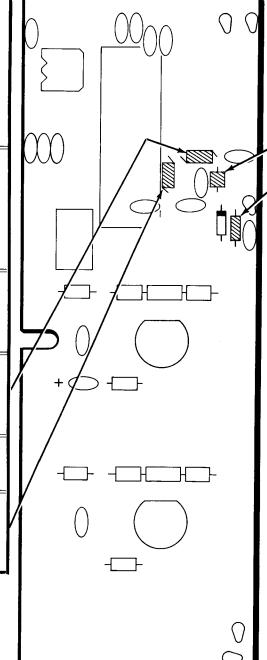


CONTINUE ♥


- C315: .56 pF (green-blue-gray-silver) phenolic capacitor.
- R302: 100 k Ω (brown-black-yellow).
- Turn the circuit board over, solder the leads to the foil, and cut off the excess lead lengths.





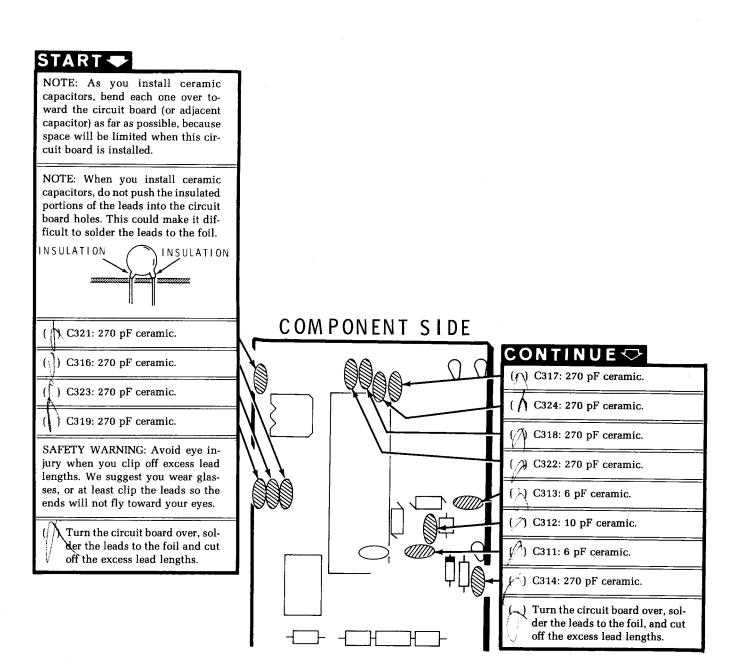



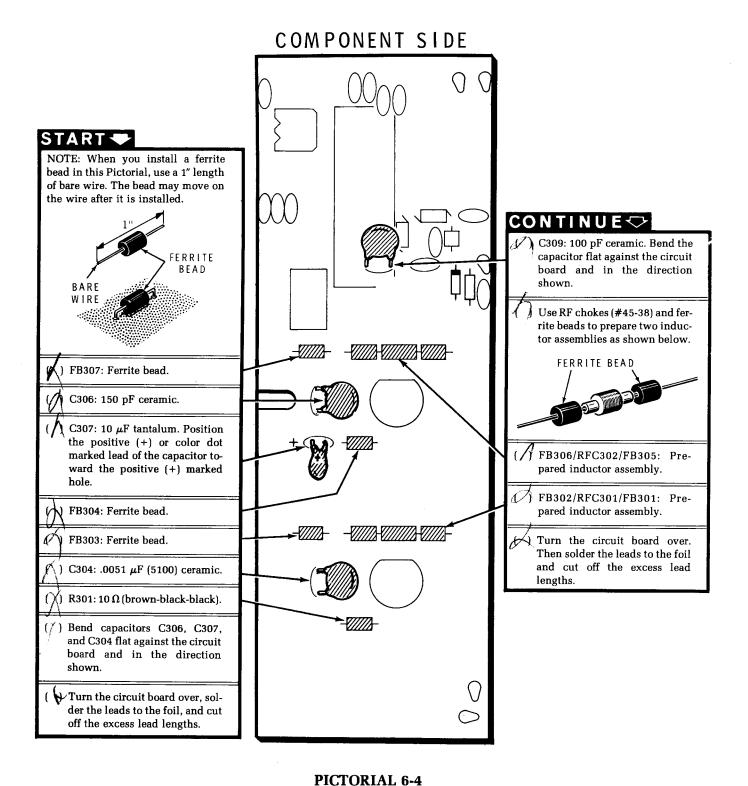



FOIL SIDE V-NOTCHES 000 NOTE THE CHANGED POSITION OF THE CIRCUIT BOARD. CONTINUE In the following numbered steps you ******* 4. As before, install eight 1" will install the 9-pin receptacle hous-bare wires into eight female ing on the foil side of the circuit connectors. board. () 5. As before, push these con-1. Locate the strip of nine nectors into the receptacle female connectors (#432housing. 855) and cut the connectors from the strip. Then cut off () 6. FB308 through FB316: Place the two indicated tabs as a 1.07 μ H ferrite bead on each shown below. of the nine leads extending FEMALE from the receptacle housing. CONNECTOR CUT OFF Be sure each bead is against EVEN WITH the housing. SHORTER TABS -) 7. Insert the receptacle housing leads into their respective () 2. Install a 1" bare wire into a holes from the FOIL SIDE of female connector as shown. the circuit board and install the receptacle housing and SOLDER beads. Be sure the V-notched BEND OVER side is positioned as shown. Disregard any numbers stamped in the housing or printed on the circuit board. Also be sure the receptacle Push the connector into the indicated end of the 9-pin rehousing and beads are pushed tightly against the ceptacle housing. Be sure the circuit board. Then solder V-notched end of the housthe leads to the foil and cut ing is positioned as shown. off the excess lead lengths. V-NOTCH PUSH IN UNTIL Connector pin in hole C. Mount TABS SNAP IN and solder the pin on the foil PLACE side of the circuit board. Avoid getting solder on the top of the pin. FOIL SIDE OF CIRCUIT BOARD STOP RIDGE SOLDER


NOTE THE CHANGED POSITION OF THE CIRCUIT BOARD


- () Relay lugs are numbered on the relay body and are also identified in the drawing to the right. Bend lug 3 back and forth with long-nose pliers until it breaks off where it enters the relay body.
- () Insert the relay into its mounting holes from the FOIL SIDE of the circuit board.

NOTE: When you solder relay lugs to the foil, in the following steps, be sure to apply solder all the way around the lug when possible.



- () Make sure the relay body is tight against the circuit board. Then solder lugs 1 and 14 to the foil.
- Check to make sure the relay body is still tight against the board. If not, melt the soldered terminals and correct the position of the relay.
- () Solder the remaining relay lugs to the foil.

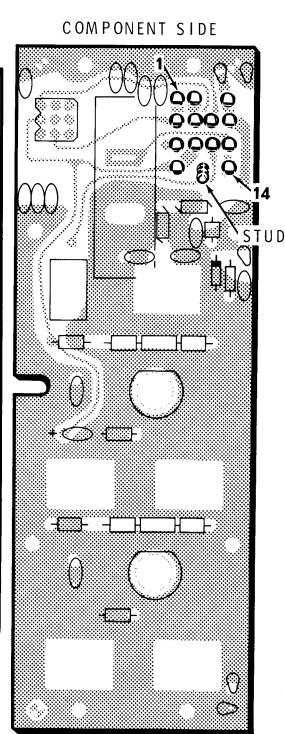

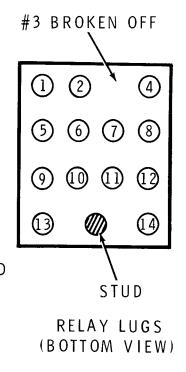

PICTORIAL 6-6




FOIL SIDE

START


NOTE THE CHANGED POSITION OF THE CIRCUIT BOARD.

The power transistors used on this circuit board are similar in appearance, but one has a power rating four times the other. It is therefore very important that you properly identify them before you install them. Transistors with broad leads are illustrated, but transistors with narrow leads may be furnished. There is no difference in ratings. The collector lead is always identified by a clipped corner on the broad leads or by an angle cut across an entire narrow lead.



The transistor leads must be well soldered to the circuit board. A good electrical connection can be assured if you first apply a layer of solder to the lead contact areas of the circuit board foil. Once the transistors have been installed, they can be easily damaged by blows or severe jolts to the studs. Handle them with care.


Use your fingers to turn an 8-32 nut as far as possible onto the stud of each transistor. Do not use the 8-32 shoulder nuts.

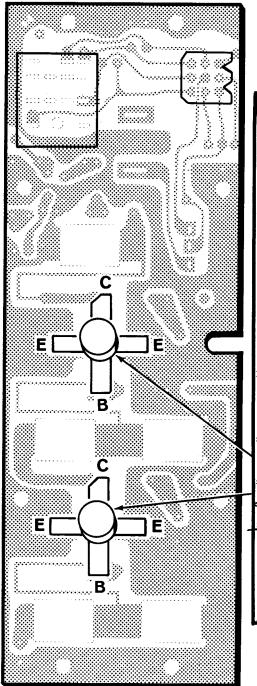

CONTINUE 🗢

Straighten bent or twisted transistor leads. Then proceed as follows to install a transistor:

From the foil side of the circuit board, push the transistor threaded stud into the mounting hole until the shoulder at the base of the stud enters the hole and the leads are flat against the foil side of the circuit board. Position the collector lead as shown, and solder each lead to the foil. Make sure the entire surface of the lead is soldered and is flat against the foil.




Q302: 2N6081 or CTC B12-12 transistor (#417-803).

Q301: 2N6080 or CTC B3-12 transistor (#417-804).

At the B (base) lead of these transistors, be sure the wires coming from ferrite bead FB304 and resistor R301 on the other side of the circuit board remain properly soldered.


NOTE THE CHANGED POSITION OF THE CIRCUIT BOARD.

Cut a 15" length of shielded cable. Prepare both ends as follows:



- 1. Remove 1/2" of the outer insulation.
- Use a pointed object and comb out the braided shield wires.
- 3. Twist the shield wires into a small, tight point.
- 4. Remove 1/4" of insulation from the inner lead.
- Melt a small amount of solder on the twisted shield and on the inner lead.

COMPONENT SIDE

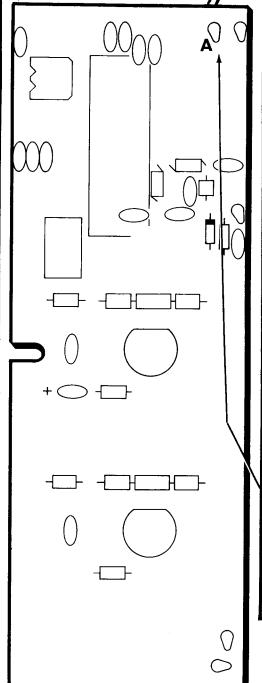


CONTINUE

) Install PCB connectors on one end of the cable as follow:


CRIMP CABLE ENDS

IN CONNECTOR.
THEN SOLDER



PCB SOLDER CONNECTORS HERE ONLY

- Place the end of the shield lead in a PCB connector. Then crimp the connector around the lead.
- Clip the small alligator clip onto the connector, it will help keep the connector from twisting while soldering.
- Carefully solder the lead to the connector. CAUTION: Do not allow the solder to flow into the open end of the connector.
- 4. Similarly install a PCB connector on the inner lead.
- 5. Save the alligator clip for use later.
- 6. Cut two 5/8" lengths of medium (heat shrinkable) sleeving.
- 7. Install the sleeving on the PCB connectors as you did before.
- () From the FOIL SIDE of the circuit board, insert the inner lead of the 15" length of shielded cable into hole A. Solder this connection on the COMPONENT SIDE of the circuit board. The shield lead will be connected later.
- () Cut off any excess lead lengths at the shielded cable connections.



COMPONENT SIDE

START -

-) Cut a 4" length of shielded cable. Prepare the ends of this cable as shown in Detail 6-9A. Use the same procedure as before.
- () From the FOIL SIDE of the circuit board, insert the inner lead at end A of the 4" length of shileded cable into hole D, and insert the shield lead into hole E. Solder both leads to the FOIL SIDE of the circuit board. The other end of this cable will be connected later.
- () Cut off any excess lead lengths at the shielded cable connections.


CONTINUE 🗇

CIRCUIT BOARD CHECKOUT

CAREFULLY INSPECT THE CIRCUIT BOARD FOR THE FOLLOWING CONDITIONS.


- () Unsoldered connections.
- () "Cold" solder connections.
- () Solder bridges between foil patterns.
- () Protruding leads. No wire leads should be longer than 1/8".
- () Transistors for the proper type and installation.
- () Tantalum capacitor for the correct position of the positive (+) lead.
- () Diode for the correct position of the banded end.

NOTE: Save the remaining length of shielded cable for use later.




Refer to Pictorial 6-10 (Illustration Booklet, Page 11) for the following steps.

- () Refer to Detail 6-10A and prepare a toroidal transformer as follows:
 - 1. Cut two 4" lengths of magnet wire.
 - Insert one end of each wire through the toroidal core. Keep the two wires parallel and wind three complete turns around the core as shown. NOTE: Be sure the two wires do not cross.
 - 3. Look carefully at the windings through the core to make sure they are not crossed. Then locate the two wires that are closest together (labeled B and C on the Detail). Cut these wires to 1/2" and use a knife blade to scrape 1/4" of insulation from each wire end. Then twist these wires together.
 - 4. Cut either remaining wire to 1/2" and the other to 3/4". Then scrape 1/4" of insulation from each wire end.

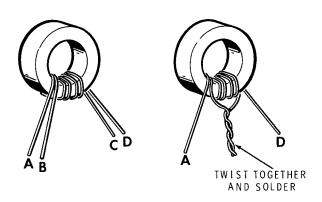


Detail 6-10A




Detail 6-10B

- () Refer to Detail 6-10B and cut off and discard the indicated lug from the terminal strip.
- () Refer to Detail 6-10C and mount the toroidal transformer to the terminal strip as follows:
 - 1. Insert the twisted wires into the eyelet of lug 3 of the terminal strip (NS).
 - 2. Insert the shortest remaining lead into the eyelet of lug 2 of the terminal strip (NS).
 - 3. Insert the remaining lead into the eyelet of lug 1 of the terminal strip (NS).
 - 4. Position the transformer against the terminal strip as shown in the Pictorial and solder the wires to the eyelets. Cut off any excess wire ends.

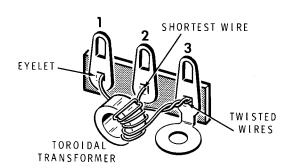


Detail 6-10C

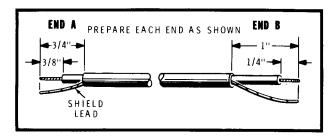

Detail 6-10D

- () Cut a 2-1/2" length of shielded cable. Prepare the ends of this cable as shown in Detail 6-10D. Use the same procedure as before. NOTE: Be sure to remove 1" of outer insulation from one end as shown.
- () Refer to Detail 6-10E and install a phono plug on end B of the shielded cable prepared in the preceding step. Be sure to use plug #438-46. Also, be sure to put 3/4" of teflon sleeving onto the inner lead before you install the plug.
- () Connect the free end of the shielded cable with the plug to the terminal strip as follows. Use 1/2" of small sleeving on the shield lead.
 Inner lead to lug 1 (S-1).

Shield lead to lug 3 (NS).

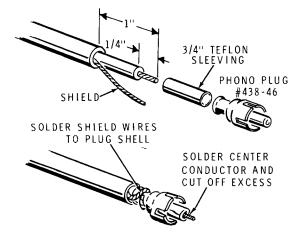

Detail 6-10E


() Position the terminal strip near the PA circuit board assembly. Then connect the free end of the shielded cable coming from the circuit board to the terminal strip as follows:

Inner lead to lug 2 (S-1).

Shield lead to lug 3 (S-2).

Set the circuit board aside temporarily.



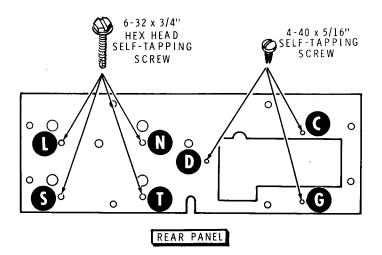

Detail 6-11A

Refer to Pictorial 6-11 (Illustration Booklet, Page 11) for the following steps.

Position the rear panel as shown in Detail 6-11A.

NOTE: You will tap seven holes in the rear panel in the following steps. To tap a hole, place the tip of the screw in the hole and apply downward pressure as you turn the screwdriver. Provide clearance for the screw to come through the other side of the panel. Be sure you keep the screw straight and turn it half way in. Then remove the screw and discard it. Use a new screw for each of the seven holes you will tap.

NOTE: Use four 6-32 \times 3/4" hex head self-tapping screws in the following four steps, and then discard them.

() Tap hole L.() Tap hole N.

(Tap hole S.

() Tap hole T.

Remove the raised metal ridge around the tapped holes with a knife, file, or other tool.

NOTE: Use three 4-40 \times 5/16" self-tapping screws in the next three steps and then discard them. Use caution that the screwdriver does not slip when you tap these holes.


 (\int) Tap hole C.

() Tap hole D.

Tape hole G.

As before, remove the metal ridge around each of the three holes.



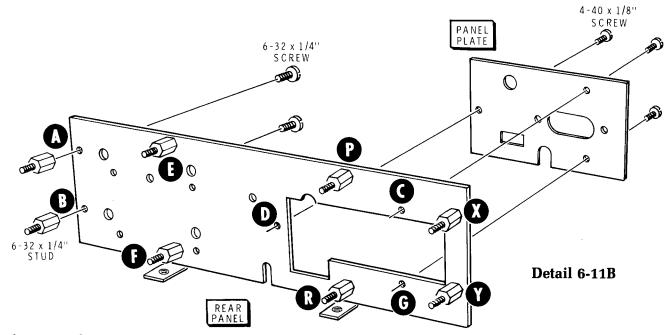

Refer to Detail 6-11B for the next two steps.


- Position the rear panel and the panel plate as shown. Then loosely mount the panel plate to the rear panel with $4-40 \times 1/8''$ screws in holes C, D, and G.
- () Loosely mount 6-32 × 1/4" studs with 6-32 × 1/4" screws in holes A, B, Y, X, P, and E. Be sure the studs are installed loosely on the side of the panel shown. Mount angle brackets at F and R as shown with 6-32 × 5/16" screws and 6-32 × 1/4" studs. Be sure the angle bracket at R is on the **outside** of the panel plate.

Refer to Detail 6-11C for the next five steps.


NOTE: When you perform the next step, use a small screwdriver to open the lips of the push-on nuts just enough to allow you to slide the nuts onto the phono socket.

- Place two 6-32 push-on nuts on the dual phono socket. The curved lips of the nuts must be on the solder lug side of the socket. Align the holes in the push-on nuts with the holes in the socket.
- Position the dual phono socket in the opening at CC in the panel plate. Then loosely mount the socket to the panel plate with 6-32 ×1/4" screws at CE and CA.
- () Push a phono plug into each phono socket.

- Tighten the 6-32 \times 1/4" screws to secure the phono socket to the panel plate while you keep the plugs centered in cutout CC.
- Solder a 1" bare wire to the ground lugs of the phono socket. Position the lead so it points straight out.

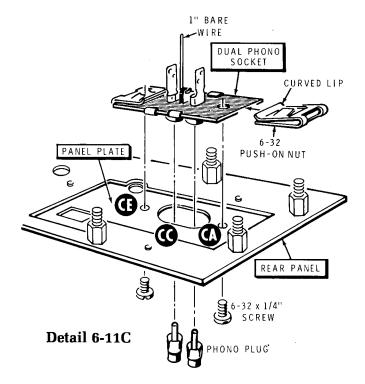



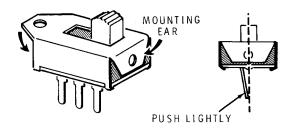


Detail 6-12A

Refer to Pictorial 6-12 (Illustration Booklet, Page 12) for the following steps.

- (<) Position the rear panel as shown. Then place #6 lockwashers on the eight studs.
- Refer to Detail 6-12A and bend the mounting ears of the slide switch down against the ends of the switch body. If it has not already been done, bend the three switch lugs so their ends are in the center of the switch, as viewed from one end.
- SW301: From the component side of the circuit board, insert the three lugs of the slide switch into the three holes at SW301 in the circuit board. DO NOT solder the lugs. Make sure the switch is centered within the outline on the circuit board.
- Position the circuit board over the rear panel exactly as shown. Then carefully fit the two assemblies together as follows:
- 1. Guide the two transistor studs into holes H and Q. (Do not put any strain on these studs.)
- 2. Insert the slide switch into opening CG in the panel plate.
- 3. Insert the two phono socket lugs and ground wire into their holes in the circuit board. You may have to bend the phono socket lugs to fulfill the requirements of step 1, above.
- 4. Insert each stud into its corresponding circuit board hole.
- Carefully inspect the space between the circuit board and the rear panel for any parts which might interfere with a proper fit. For example, if a ceramic capacitor interferes, bend it over.
- () Start 6-32 nuts onto each stud except those at R and F. Turn the nuts down against the circuit board, but do not tighten them.

- () From the rear panel side of the assembly, tighten the 6-32 screws into the eight studs. Use the 1/4" end of the end wrench to hold the studs while you tighten the screws.
- () Tighten all screws on the rear panel and panel plate if this has not already been done.
- () Look into holes CF, K, M, U, and V to see that the trimmer adjusting screws are centered in the holes. If not, melt the solder at the trimmer capacitor terminals and move the capacitor as necessary to center the screws in the holes.
- () Solder the two phono socket lugs and the phono socket ground wire to the foil side of the circuit board. Cut off the excess length of the ground wire.
- Make sure the slide switch body is against the back of the panel plate. Then solder the three switch lugs to the foil.
-) Remove the two phono plugs and lay them aside for use later.
- () Remove the $6-32 \times 1/4''$ screws from holes CA and CE in the panel plate.
-) Remove the 6-32 nuts from the studs on the circuit board side of the assembly and carefully remove the circuit board. Do not drop the lockwashers from the studs under the circuit board.
- () Refer to Detail 6-12B and solder phono socket lug CJ to the foil at CK on the **component side** of the circuit board.

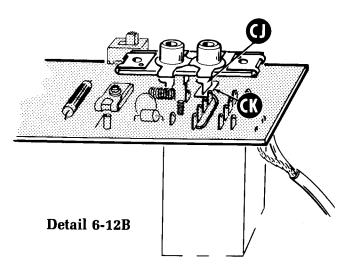


NOTE: In the next two steps the length of the capacitor leads are extremely important. Be sure to cut and bend these leads properly.

Refer to Detail 6-12C (Illustration Booklet, Page 12) for the next three steps.

- () Locate a 12 pF mica capacitor and cut the leads to 7/8".
- () Place 3/4" of small sleeving over each capacitor lead.
- () Bend 1/8" of the end of each lead as shown.
- () Refer to Detail 6-12D and solder the capacitor leads between the ANT phono socket lug and the ground lug as shown. Place the capacitor leads against the already-soldered connection and heat the connection with your soldering iron.
- () Bend the capacitor over against the circuit board away from the relay.

NOTE: Silicone grease will be used to insure proper heat tranfer from the power transistors to the rear panel. CAUTION: Do not get this grease in your eyes or on your clothing. Wash your hands after each application of silicone grease.


- () Squeeze out some silicone grease from the container, about the size of a small pea, and spread it around holes H and Q on the stud side of the rear panel. Save the remaining silicone grease for use later.
- () Again fit the circuit board and the rear panel together. Fasten the circuit board to the panel with #6 lockwashers and 6-32 nuts on all the studs except A, F, R, X, and Y. The nuts should be only finger tight.
- () Refer to inset drawing #1 on the Pictorial and rebend three #6 solder lugs to a 90° angle as shown.
- Fasten the circuit board to the rear panel at holes A and Y with #6 solder lugs and 6-32 nuts. Position the solder lugs as shown in the Pictorial. The nuts should be only finger tight.
- () Refer to inset drawing #2 on the Pictorial and prepare a #8 solder lug as shown.

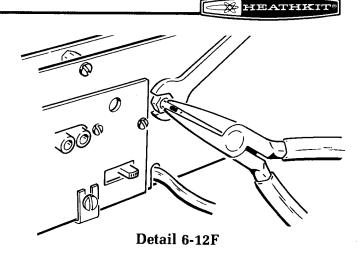

- () Fasten the circuit board to the rear panel at hole X with a #6 lockwasher, a #6 solder lug, a #8 solder lug, and a 6-32 nut as shown. Position the solder lugs as shown. The nut should be only finger tight.
- () Place a small amount of silicone grease on the shoulders of two 8-32 shoulder nuts and turn them onto the two transistor studs. The shoulders of the nuts should just enter the panel holes, but the under side of the nut should not touch the panel. NOTE: Save the remaining silicone grease for use later.
- Install #6 lockwashers and 6-32 studs at F and R. Use the $1/4'' \times 5/16''$ end wrench to securely tighten the studs.
- () Install the previously removed 6-32 \times 1/4" screws in holes CA and CE of the panel plate.
- Refer to Detail 6-12E and, using a screwdriver blade to reach in between the rear panel and the circuit board, turn the nuts on the two transistor studs until they touch the back of the rear panel. DO NOT use the end wrench.
- () Refer to Detail 6-12F and hold the end of a transistor stud with pliers while you use the end wrench to tighten the shoulder nut.
- () Similarly, tighten the shoulder nut on the other transistor stud.
- Securely tighten all rear panel hardware. Pay particular attention to the six nuts on the foil side of the circuit board.
- () Wipe off any excess silicone grease from around the transistor studs.
- () Wash your hands.



INSTALLATION

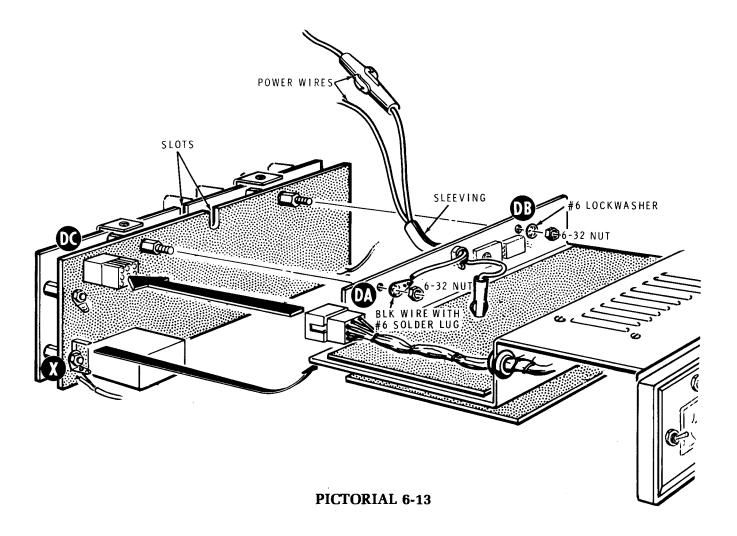


Refer to Pictorial 6-13 for the following steps.

- () Position the chassis upside down as shown.

 Then position the power amplifier circuit board assembly near the chassis as shown.
- () Carefully push the two studs on the power amplifier assembly into holes DA and DB in the chassis. Make sure the sleeving on the power wires is positioned in the slots in the assembly. Also make sure the #8 solder lug, mounted to stud X on the power amplifier circuit board, is on the indicated side of the chassis. CAUTION: Do not force the circuit board assembly into position or you may damage it.
-) Use a 6-32 nut to secure the #6 solder lug on the end of the large black wire to the stud at DA.
- () Mount the power amplifier assembly to the chassis at DB with a #6 lockwasher and a 6-32 nut.
- () Push the 9-pin housing onto the connector at DC.



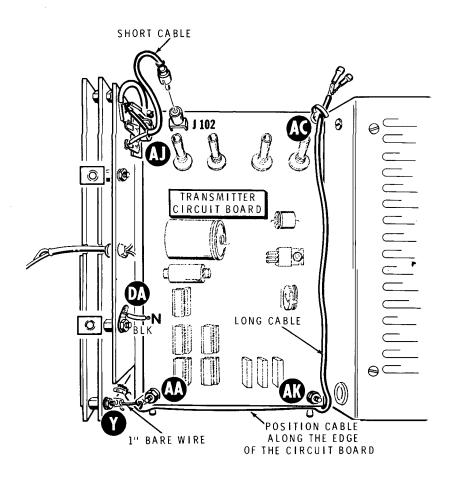


PICTORIAL 6-14

Refer to Pictorial 6-14 for the following steps:

- () Remove the nut and lockwasher from the screw at AJ on the transmitter circuit board. Then use the hardware to mount the terminal strip coming from the power amplifier circuit board assembly at AJ as shown. Be sure to position the terminal strip as shown.
- () Push the plug on the end of the short cable coming from the terminal strip into J102 on the transmitter circuit board.
- () Route the long cable coming from the power amplifier circuit board as shown. Then bend the solder lugs at AA, AK, and AC upward to hold the cable in place. Position the cable along the edge of the circuit board between solder lugs AA and AK. The free end of this cable will be connected to the receiver circuit board later.
- () Connect the free end of the black wire coming from pin N on the transmitter circuit board to the inner hole of solder lug DA (S-1). NOTE: Be sure the black wire that was previously connected to this solder lug remains well soldered.
- () Connect a 1" bare wire from solder lug Y (S-1) on the power amplifier circuit board to solder lug AA (S-1) on the transmitter circuit board.





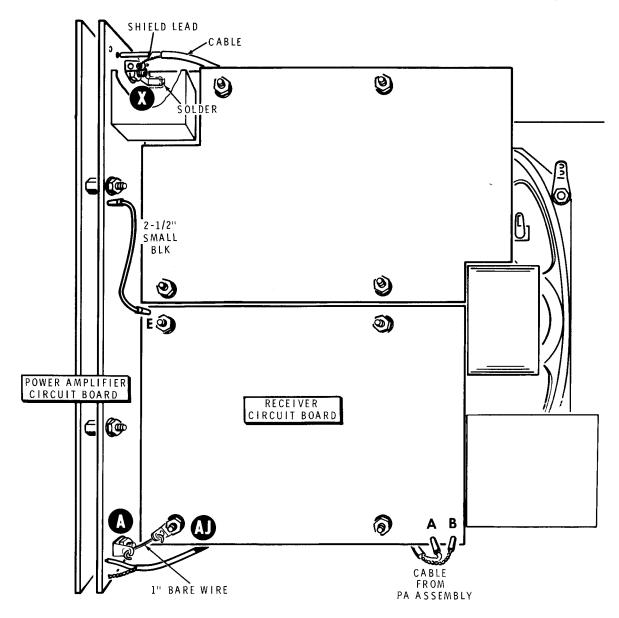

PICTORIAL 6-15

Refer to Pictorial 6-15 for the following steps:


- () Position the chassis right-side-up as shown.
- () Locate the free end of the cable coming from the power amplifier circuit board. Then connect the inner wire to pin A and the shield wire to pin B on the receiver circuit board.
- () Connect a 1" bare wire from solder lug A (S-1) on the power amplifier circuit board to solder lug AJ (S-1) on the receiver circuit board.
- () Prepare a 2-1/2" small black stranded wire.
- () Install PCB connectors on each end of this wire.

-) Cut two 5/8" lengths of medium (heat shrinkable) sleeving.
- () Install a 5/8" length of sleeving on each PCB connector on the 2-1/2" wire.
- Connect the 2-1/2" wire from the indicated PCB pin on the power amplifier circuit board to receiver circuit board PCB pin E.
- Connect the shield lead of the cable connected to hole A on the power amplifier circuit board to the #6 solder lug at X (S-1).
- () Solder the #8 solder lug coming from stud X to the chassis as shown.




MICROPHONE INSTALLATION

NOTE: If you purchased the kit with the standard microphone, proceed directly to "Microphone Wiring." If you purchased the kit with the Micoder, locate that kit and assemble it up to "Level Adjustment."

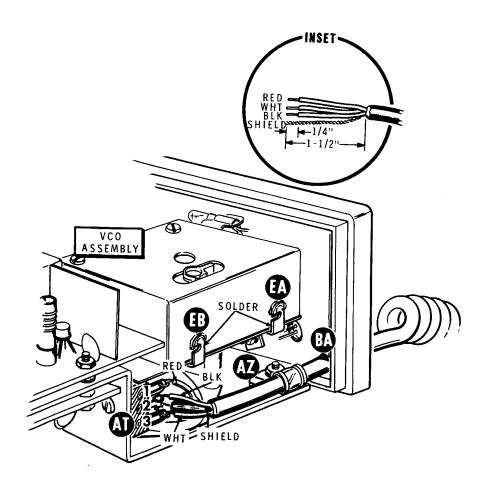

PICTORIAL 7-1

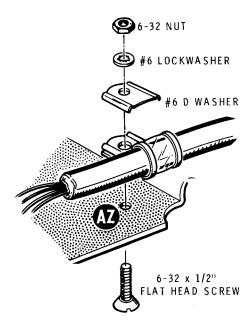

Detail 7-1A

MICROPHONE WIRING

Refer to Pictorial 7-1 for the following steps.

- () Position the chassis right side up.
- () Locate the microphone and prepare the wires at the free end of the microphone cord as shown in the inset drawing. Melt a small amount of solder on each wire to hold the fine strands together.
- () Route the prepared end of the microphone cord through hole BA in the front panel.

Connect the wires of the cord to terminal strip AT as follows:

- () White wire to lug 3 (S-2).
- () Black wire to lug 2 (NS).
- () Shield wire to lug 2 (S-4). Use 1-1/4" of small sleeving on this lead. NOTE: This will be (S-3) if capacitor C1 is not installed.
- () Red wire to lug 1 (S-3). NOTE: This will be (S-2) if capacitor C1 is not installed.

- () Refer to Detail 7-1A and install a cable clamp around the microphone cord at AZ. Then secure the cord to the bottom of the chassis with a 6-32 × 1/2" flat head screw, a #6 D washer, a #6 lockwasher, and a 6-32 nut. Tighten the hardware securely.
- () Bend the solder lugs at EA and EB, on the VCO assembly, up against the top VCO shield as shown. Hold the top shield tight against the bottom shield; then solder the lugs to the shield.

This completes the "Step-by-Step Assembly" of your Synthesized 2-Meter FM Transceiver. Before you proceed to "Initial Tests," look it over carefully to be sure:

- 1. That all the hardware is tightened.
- 2. There are no unsoldered connections.
- 3. There are no cut off wire ends or solder splashes lodged in the wiring.
- 4. There are no protruding wire ends that could short out to adjacent lugs.





INITIAL TESTS

POWER SOURCES

Your Transceiver must have power applied to it so you can perform the steps in the "Initial Tests" and "Alignment" sections of this Manual. If you have the Heathkit Model HWA-2036-3 Power Supply, or some other power supply capable of supplying 13.8 volts DC at 2.6 amperes, perform the steps under "Fixed Station." If you plan to use this tranceiver as a mobile station only, proceed to "Mobile Station."

Fixed Station

NOTE: This Transceiver should be powered at a fixed station by the Heathkit Model HWA-2036-3 Power Supply or equivalent. If you use the HWA-202-1 Power Supply, you may have to decrease its output voltage to 12.5 volts. This will somewhat decrease the Transceiver's power output, but will still keep the Power Supply ripple within limits by decreasing the current drain.

Install a connector on the output wires of your power supply. Refer to the first four steps under "Fixed Station Installation" on Page 128. Then return to this section of the Manual.

Mobile Station

If you will use this Transceiver in a mobile installation only, locate the large red and large black wires furnished with this kit. Refer to the first four steps under "Fixed Station Installation" on Page 128 and install a connector on one end of each wire. Temporarily connect the free end of the red wire to the positive (+) terminal and the free end of the black wire to the negative (-) terminal of your battery. Then return to this section of the Manual.

Refer to Pictorials 8-1 and 8-2 (in the Illustration Booklet) for the location of the controls and switches called out in the following steps.

TESTS

() Preset the controls and switches as follows:

SQUELCH	Fully Counterclockwise
SPKR	INT
MODE	SIM
TONE	OFF
VOLUME	Fully counterclockwise
	until it clicks.

The position of the other controls and switches is not important at this time.

Adjust your power supply for 13.8 volts. Then plug the power supply connector into the Transceiver's power connector.

NOTE: DO NOT depress the microphone button until you are directed to do so in a step.

() Turn your power supply on if you are using one.

NOTE: If your Transceiver does not respond correctly in the next step (in all three ways), turn the Transceiver off and proceed to the "Initial Tests Troubleshooting Chart."

() Turn the VOLUME control clockwise about 1/2 turn. The meter lamp should light, the Synth Lock Lamp should light (either briefly or continuously), the relay may or may not click, and you should hear random noise.




Use a voltmeter to check the voltages at the following points. If the voltages are outside the limits given, turn the Transceiver off and proceed to the "Initial Test Troubleshooting Chart."

NOTE: Refer to Pictorials 9-10 through 9-12 in the Illustration Booklet for the pins called out in the following steps.

- () 11 volts (10.7 to 12) at pin U on the transmitter circuit board.
- () 5 volts (4.75 to 5.25) at pin S on the transmitter circuit board.
- () Turn the Transceiver off.

This completes the "Initial Tests." Proceed to "Alignment."

INITIAL TEST TROUBLESHOOTING CHART

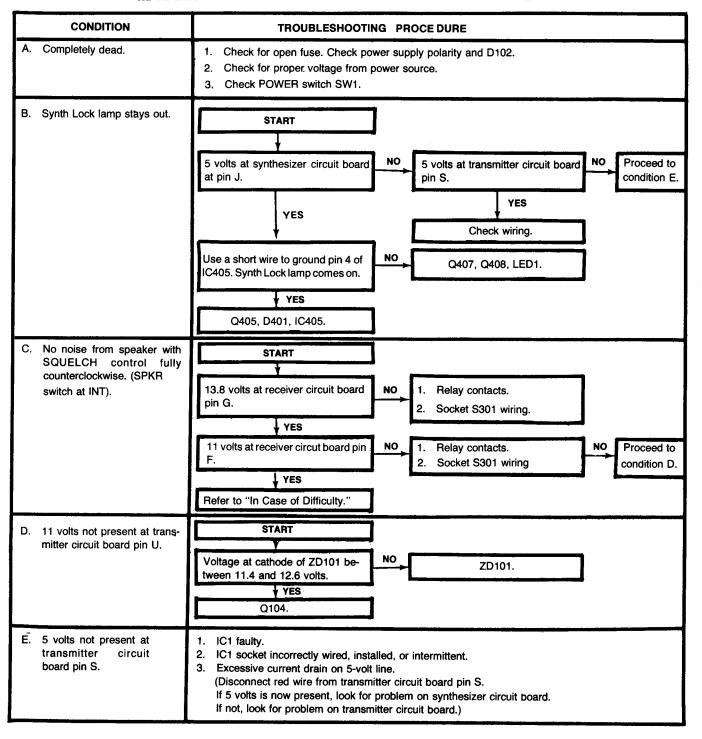



ALIGNMENT

You can completely align your Transceiver, with the exception of the tones, with a VTVM or a high input impedance VOM (at least 20,000 ohm/volt) and a receiver capable of receiving WWV on 15, 20, or 25 MHz. A frequency counter, however, would be helpful to check the transmitter frequencies and to set the tones. Alignment with a frequency counter will insure optimum performance.

IMPORTANT: DO NOT align this Transceiver with the antenna connected. This could cause a transmitter power loss and, more important, harmonic radiation which could interfere with television reception and other communication devices. As emphasized in the "Installation" section, all adjustments for antenna matching must be made to the antenna and transmission line and not to the Transceiver.

COIL CORES


During the alignment procedure, you will use the coil alignment tool to adjust a number of coil cores. You will find that these cores are usually within two turns of the correct position.

- If a coil core will turn but offers resistance, put a
 very small amount of petroleum jelly on the
 inside of the coil form next to the core and then
 back the core out. Its threads will pick up the
 lubrication and the core will turn more easily.
- If you wedge a core down against the circuit board and cannot back it out, you will have to unsolder the coil form pins so the coil form can move away from the board slightly to relieve the pressure.

ALIGNMENT PREPARATION

Refe	er to Pictorial 9-1 for the following steps:	Refer to Pictorial 9-2 for the following steps:
()	Prepare an 8" small red stranded wire.	() Prepare an 8" small black stranded wire.
()	Solder a PCB connector (#432-120) to one end of the prepared wire.	() Solder a PCB connector (#432-120) to one end of the prepared wire.
()	Solder a small PCB pin to the other end of the prepared wire.	() Solder an alligator clip to the other end of the prepared wire.
) 1/4	½ ¾ 1 (INCHES) 2 3	4 5 6 7




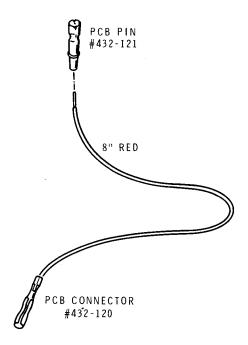

PICTORIAL 9-1

Refer to Pictorial 9-3 for the following steps:


- () Prepare a 14" shielded cable as shown.
- () Solder a PCB connector (#432-120) to each lead at each end of the cable.

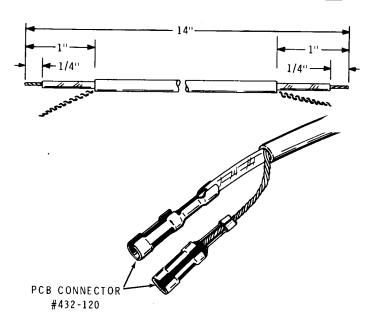


PICTORIAL 9-3

Refer to Pictorial 9-4 for the following steps.:

- () Locate a 51 ohm, 1/2-watt (green-brown-black) resistor. Then cut each lead to 1/2".
- () Install the prepared 51 ohm resistor in a phono plug. Be sure to use the #438-46 plug. Then cut off the excess lead lengths. This assembly forms an "alignment load."

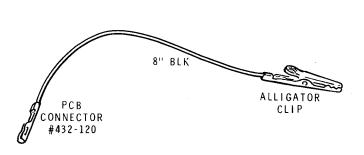

PICTORIAL 9-2

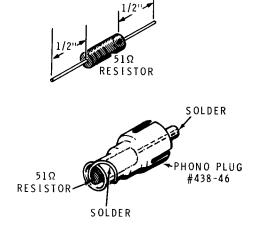

PICTORIAL 9-4

4		Re loa	fer to Pictorial 9-5 and assemble a 50 ohm dummy ad as follows:
250)	() Cut one lead of a 100 ohm, 2-watt (brown- black-brown) resistor to 1/4". Then form the lead into a small hook.
NEC		(Bend down the lead of another 100 ohm resistor, hook the lead of the first resistor around this lead, and solder the leads together as shown.
		(]	Cut a 1/4" length of small black sleeving. Then place it into the back (large opening) of a phono plug.
4	([]	Push the lead of the resistor as far as possible through the sleeving and out the phono plug tip. Solder the resistor lead to the phono plug tip and cut off the excess lead.
S. S	()	Form the leads of the two resistors so they touch the phono plug tip as shown. Then solder each lead to the housing.
0	٠ (و ()	If you have an ohmmeter, measure the resistance from the phono plug tip to its outer shell to make sure there is no short circuit. The correct resistance is about 50 ohms.
J	f f	Refe ollo	er to Pictorial 9-6 and assemble an RF probe as ows:
63	()	Prepare a 4-lug terminal strip as shown in Detail 9-6A.
19 m	()	Position the 4-lug terminal strip as shown in Detail 9-6B. Then push a small PCB pin into the eyelets of lugs 1, 3, and 4. Solder the pins to the eyelets.
	()	Connect the lead at the banded end of a 1N191 diode (#56-26, brown-white-brown) to lug 2 (NS). Connect the other diode lead to lug 3 (NS).
7 /	16	aa	E: In the following step, bend over the capacitor connected to lug 1 as shown. DO NOT cut this off except as you are directed in the step.
	()	Connect a .001 μ F ceramic capacitor between lugs 1 (S-1) and 2 (NS). Cut the lead extending from lug 1 to 3/4".
1 3	()	Connect another .001 μ F ceramic capacitor between lugs 3 (\$-2) and 4 (NS).

Connect a 22 k Ω , 1/4-watt (red-red-orange)

resistor between lugs 2 (S-3) and 4 (S-2).

()	Push the PCB connector on the red jumper wir onto pin C of the RF probe.	·e

- Push the PCB connector on the black jumper wire onto pin B of the RF probe.
- () Refer to Pictorial 9-7 and use a pair of pliers to push the 1" steel blade into the smaller end of the nut starter until 1/8" remains exposed. Use this tool when you are instructed to adjust trimmer capacitors and the controls that are mounted on the circuit boards.



PICTORIAL 9-8

- () Refer to Pictorial 9-8 and place a small tape "flag" on the long end of the coil adjustment tool. This will aid you in counting the number of turns of the tool during alignment.
- Set the jumper wires, the alignment load, the 50 ohm dummy load, the RF probe and the adjustment tools aside. They will be used during alignment of this Transceiver.


Refer to the following Pictorials (Illustration Booklet, Pages 12 and 13) to determine the location of components and circuit points in the following steps.

Front panel	Pictorial 8-1
Rear panel	Pictorial 8-2
VCO assembly	Pictorial 9-9
Synthesizer circuit	Pictorial 9-10
board	
Transmitter circuit	Pictorial 9-11
board	
Receiver circuit	Pictorial 9-12
board	

- () Turn the VOLUME control fully counterclockwise until it clicks (off position).
- () Turn the SQUELCH control fully counterclockwise.
- () Connect the Transceiver to your power source.
- () Make sure the crystals at Y401, Y402, Y403, and Y405 on the synthesizer circuit board are pressed firmly into their socket pins.



VCO ADJUSTMENT

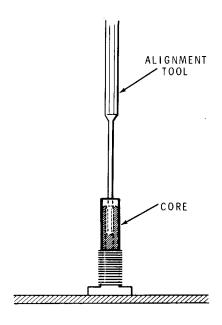

Detail 9-9A

- () Preset trimmer capacitor C511 on the VCO circuit board to mid capacity (metal part as shown in the inset drawing on Pictorial 9-9).
- () Refer to Detail 9-9A and use the coil adjustment tool to turn the core of L501 on the VCO assembly until the top of the core extends 1/16" from the top of the coil form.

NOTE: The circuits in this Transceiver are designed to operate properly over any 4 MHz segment within the range from 143.500 MHz to 148.500 MHz. Before you proceed, select the segment in which you wish to operate and write down the upper and lower limits of that segment in the margin of this page. Be sure to include the transmitter offset frequencies when you figure your 4 MHz range. Only the last four digits of the operating frequency are displayed on the switches. A setting of 6.940 is actually 146.940 MHz, etc.

- () Set the frequency selector switches to the center of your 4 MHz segment (normally 146.000 MHz).
- () Set the MODE switch to SIM.

() Turn the Transceiver on. The Synth Lock lamp should light.

NOTE: If the Synth Lock lamp will not go out in the following step, refer to the "Synthesizer Problems" troubleshooting chart (Illustration Booklet, Page 15).

-) **Slowly** adjust the slug in coil L501 clockwise until the Synth Lock lamp goes out. NOTE: The top of the slug should be almost flush with the top of the coil form.
- Push the connector on the end of the black jumper wire onto TP402 on the synthesizer circuit board. Then connect the alligator clip to the chassis.
- () Push the 50 ohm dummy load (two 100 ohm resistors prepared earlier) into the ANT socket on the rear panel.

NOTE: Depress the microphone button only long enough to make the following adjustments.

- Depress the microphone button. The Synth Lock lamp should light briefly and then go out. If it stays on, adjust coil L501 slightly until the lamp goes out.
- () Depress the microphone button and use a VTVM to measure the voltage at TP401 on the synthesizer circuit board, and adjust coil L501 for an indication of 2.2 volts.
- () Remove the jumper wire you connected between TP402 and the chassis.

NOTE: DO NOT press the microphone button when you perform the next step.

- With the VTVM still connected to TP401, adjust trimmer capacitor C511 on the VCO circuit board for 2.2 volts.
- () Turn the Transceiver off.



TRANSMITTER ALIGNMENT

()	Set the frequency selector switches to the center of your 4 MHz segment (normally 146.000 MHz) and set the MODE switch to SIM, if this	() 5. Depress the microphone button and adjust coil L105 for a maximum meter indication.
	has not already been done.	() 6. Move the VTVM probe from TP103 to TP104
()	Unplug the cable from J102 on the transmitter circuit board.	() 7. Depress the microphone button and adjus coils L105, L106, and L107 for maximum
()	Plug the alignment load (51 ohm resistor and phono plug) into J102.	meter indication. Repeat this adjustment two or three times. NOTE: If coil L105 has two peaks, use the peak with the slug highest in the coil.
()	Turn the slugs in coils L101 and L102 counterclockwise until the top of the slugs are flush with the top of the coil forms. Then turn each slug clockwise 9 turns.	() 8. Move the VTVM probe from TP104 to TP101 and repeat steps 1 through 7.
()	Turn the Transceiver on.	() 9. Set the frequency selector switches 1.5 MHz below the center of your 4 MHz segment
VTV	E: Use the black jumper wire to connect your M to the test points in the following steps. Be to connect the common VTVM lead to the chas-	(normally 144.500 MHz). Move the VTVM probe from TP104 to TP101. Then depress the microphone button and adjust coil L101 for maximum meter indication.
()	Connect the probe of your VTVM to TP101 on the transmitter circuit board.	()10. Set the frequency selector switches 1.5 MHz above the center of your 4 MHz segment (normally 147.5 MHz). With the VTVM probe
step,	E: If you do not obtain a meter reading in the next try turning the slugs of coils L101 and L102 (no than 1-1/2 turns) in either direction until you get	still on TP101, depress the microphone but- ton and adjust coil L102 for maximum meter indication.
a rea	ding.	()11. Repeat steps 9 and 10.
()	 Depress the microphone button and adjust coils L101 and L102 for maximum meter in- dication. Repeat this adjustment two or three times. 	()12. Adjust coil L103 exactly 1/4 turn clockwise.
()	2. Move the VTVM probe from TP101 to TP102.	() Turn the Transceiver off.
()	3. Depress the microphone button and adjust	() Disconnect your VTVM from the Transceiver.
•	coils L103 and L104 for maximum meter indication. Repeat this adjustment two or three times.	() Unplug the alignment load from J102 on the transmitter circuit board and reconnect the cable coming from the power amplifier circuit
()	4. Move the VTVM probe from TP102 to TP103.	board to I102.



10 MHz OSCILLATOR ADJUSTMENT

NOTE: The 10 MHz oscillator is divided down to provide the 833.333 Hz signal which determines the spacing between adjacent channel frequencies (when it is multiplied by 6). It is very important that this oscillator be set as accurately as possible, since any error will accumulate across the band. Two methods of adjustment are given, in the order of preference.

ALIGNMENT WITH WWV

- () Tune a short-wave receiver to WWV on 10, 15, 20, or 25 MHz. Use the highest frequency that you can receive in your area.
- () Turn the Transceiver upside down, if this has not already been done.
- Remove 1/4" of insulation from one end of a suitable length of insulated wire. Then wrap this end of the wire around TP108 on your transmitter circuit board.
- () Position the free end of the wire coming from TP108 near the antenna input on your receiver.
- () Turn the Transceiver on.

- () Adjust trimmer C144, on the transmitter circuit board, for a zero beat with WWV (during a time when no tone is being transmitted). The frequency may shift slightly when you remove the alignment tool, so be sure the zero beat occurs AFTER you remove the tool.
- () Turn the Transceiver off and remove the insulated wire.

ALIGNMENT WITH A FREQUENCY COUNTER

NOTE: The frequency counter must have a crystal time base, recently checked for accuracy with WWV, and must read out to ± 1 Hz.

- () Connect the frequency counter to TP108 on the transmitter circuit board.
- () Turn the Transceiver on.
- Adjust trimmer capacitor C144, on the transmitter circuit board, for a reading of 10.000,000 MHz. Check this reading after you remove the adjustment tool from the trimmer.
- () Turn the Transceiver off and disconnect the frequency counter.

(normally 145.000 MHz).

NOTE: Unless you are directed otherwise, do not depress the microphone button for more than 30 sec-

onds continuous. Release the microphone button



20 seconds, the dummy load resistors should be

too hot to touch.

() Turn the Transceiver off.

POWER AMPLIFIER ADJUSTMENT

NOTE: Make sure all the screws are in the rear panel before you attempt to align the power amplifier.				you make each adjustment. DO NOT adjust any oils L101 through L107 on the transmitter circuit		
()	Unplug the black wire from connector pin C on the PA circuit board. Use the 8" black jumper wire to connect a VTVM to pin C. Then connect		board for maximum output. You should only adjust these coils by following the procedure under "Transmitter Alignment."			
	the common VTVM lead to the chassis. If you have an in-line wattmeter (capable of accurate readings at the operating frequency), connect	R	efe	r to Pictorial 8-2 for the following steps.		
	the wattmeter between the 50 ohm dummy load and the ANT socket on the rear panel. Use the	()	Turn the Transceiver on.		
	VTVM for an indication of relative power output when you perform the following adjustments.	()	Depress the microphone button. The VTVM should indicate upscale. If there is no meter indication, adjust trimmer capacitor A or B (or		
nent	u find it necessary to gain access to the composide of the PA (power amplifier) circuit board, to "PA Circuit Board Access" in the "In Case of			both) until there is some indication on the meter.		
Diffic	Refer to Pictorial 8-2 (in the Illustration Booklet) and turn each trimmer capacitor fully clockwise (tighten each trimmer only until you feel resistance). Then turn each trimmer coun-	()	Depress the microphone button and adjust the trimmer capacitors, through the rear panel holes, for a maximum meter indication. Use the following adjustment sequence: A, B, C, D, E, D, C, A, B. Remember to observe the 30 second		
	terclockwise as follows:			limit when you depress the microphone button.		
	trimmer at A 1/4 turn trimmer at B 3/4 turn trimmer at C 3/4 turn	()	Try different settings of trimmer capacitors C and D to obtain a maximum meter indication.		
	trimmer at D 1 turn trimmer at E 1/2 turn	()	Again adjust trimmer capacitors A and B for a maximum meter indication. NOTE: Do not adjust trimmer capacitor A any further capacitors.		
()	Locate the free end of the short shielded cable coming from the PA circuit board. Then plug it into J102 on the transmitter circuit board, if this			just trimmer capacitor A any further counterclockwise than necessary to obtain maximum power output.		
	has not already been done.	()	Allow the dummy load to cool to room temperature.		
()	If it has not already been done, connect the 50 ohm dummy load to the ANT socket on the rear	(,			
	panel (either direct or through an in-line watt- meter).	,)	Disconnect the VTVM and 8" black jumper wire. Then reconnect the black wire, coming from pin E on the receiver circuit board, to pin C		
()	Be sure the MODE switch is at SIM.			on the PA circuit board.		
()	Set the frequency selector switches to the center of your 4 MHz segment, if this has not already been done. Then reduce this setting by 1 MHz	()	Depress the microphone button for 20 seconds. The meter indication should be between the first scale division and midscale. At the end of		



RECEIVER ALIGNMENT

Refer to Pictorials 9-10 and 9-12 in the Illustration Booklet for the location of the coils called out in the following steps.

NOTE: Read the next step completely before you actually perform the step. Then perform the step carefully; you may need to refer to the chart later.

() Adjust the slug in each of the following coils (on the receiver and synthesizer circuit boards) counterclockwise until the top of the slug is flush with the top of the coil form, or until you encounter resistance to further adjustment. Count the number of turns that each coil requires to accomplish this and write the number, to the nearest 1/4 turn, in column A of the following chart.

COIL	A	В	С	
L201		2		
L202		3-3/4		
L203		2	• • • • • • • •	
L204		7-1/2		
L205		1-1/2		• • • • • • • •
L206		-1		
L207		1/2		
L208		2		
L209		1		
L210		2		
L212	l	0		
L213	1	0		
L402		1		
L403	1	1		

- () Add the number you entered in column A to the number shown in column B and write the sum in column C for each coil.
- () Adjust the slug in each coil clockwise by the number of turns in column C.
- () Locate the RF probe that you assembled earlier.

NOTE: Refer to Pictorial 9-13 for the location of the RF probe pins called out in the following steps.

() Push the PCB connector on the red jumper wire onto pin C of the RF probe, if this is not already done.

()	Temporarily disconnect the green wire from pin P on the receiver circuit board. Then push this wire onto the PCB pin on the free end of the red jumper wire (coming from the RF probe).
()	Push the PCB connector on the end of the black jumper wire onto pin B of the RF probe, if this is not already done. Connect the alligator clip on the other end of the wire to the chassis.
()	Temporarily disconnect the inner lead of the shield cable from pin C on the receiver circuit board and push the connector on this wire onto pin A of the RF probe.
()	Set the frequency selector switches to 146.000 MHz.
()	Make sure the RF probe assembly is not touching any wires or components which could cause a short circuit.
()	Turn the Transceiver on.
()	Adjust coils L402 and L403 on the synthesizer circuit board for a maximum indication on the S meter.

Turn the Transceiver off.

Turn the Transceiver on.

Turn the Transceiver off.

same position.

board.

on the receiver circuit board.

() Disconnect the inner shielded cable lead from pin A of the RF probe and reconnect it to pin C

Hold the RF probe by the ground lug and touch the bare wire extending from lug 1, to gate 2

(G2) of transistor Q202 on the receiver circuit

the receiver circuit board for maximum deflection on the S meter. NOTE: These two coils interact. When they are properly adjusted, the

slugs in these coils will be at approximately the

() Adjust coils L212 and L213 (in that order) on



(J	of the receiver circuit board.	s	till	essary to reduce the meter reading. If the meter goes past midscale, detune coil L207 clockwise, ecessary, to keep the meter below midscale.
()	Temporarily unplug the shielded cable from pins A and B on the receiver circuit board.	()	Adjust coils L201 through L209 on the receiver circuit board for a maximum indication on the S meter. NOTE: It may be necessary to begin the alignment by adjusting these coils for
()	Connect the inner lead at one end of the shielded jumper wire to TP106 and connect the shield lead to TP107 on the transmitter circuit			maximum quieting (least noise) until there is enough signal to cause a meter indication.
		board.	()	- <u>-</u>
()	Connect the inner lead at the free end of the shielded jumper wire to pin A and connect the shield lead to pin B on the receiver circuit board.			is no further improvement. NOTE: Coil L204 may have two peaks. If yours does, use the peak that occurs with the slug nearest the circuit board.
()	Refer to the inset drawing on Pictorial 9-11 and	()	Adjust coil L207 for maximum indication on the S meter.
	,	adjust trimmer capacitor C147 on the transmitter circuit board to minimum capacity.	()	Turn the Transceiver off.
()	Set the frequency selector switches to 145.000 MHz.	()	Remove the shielded jumper wire between TP106 and TP107 on the transmitter circuit board and pins A and B on the receiver circuit
()	Turn the Transceiver on. The S meter should indicate up-scale and/or the receiver should			board.
		show quieting (a reduction in noise from the speaker). NOTE: You can check this by changing the setting of the center frequency selector switch to 1 and back to zero. The receiver should be quieter when you have the switch in	()	Reconnect the inner wire of the shielded cable coming from the PA circuit board to pin A and the shield wire to pin B on the receiver circuit board.
		the zero position. If not, adjust trimmer capacitor C435 on the synthesizer circuit board	()	Turn the Transceiver on.
N.T	О Т	until it is.	()	Adjust coil L210 on the receiver circuit board for maximum noise.
		E: If the meter goes beyond midscale in the next adjust C147 on the transmitter circuit board as	()	Turn the Transceiver off.



OFFSET OSCILLATOR ADJUSTMENT

Receiver Offset Oscillator

NOTE: You will now adjust the 21.55 MHz receiver offset oscillator and quadrature coil. Two methods are given. The first method is best, but the second method is acceptable.

ALIGNMENT WITH A FREQUENCY COUNTER

NOTE: The frequency counter you use for this adjustment must be capable of counting up to at least 25 MHz.

()	Attach the frequency counter probe to pin C on the synthesizer circuit board.
()	Turn the Transceiver on.
()	Set the frequency selector switches to 146.000 MHz. Then adjust C435 on the synthesizer circuit board until the counter indicates 22.550,000 MHz.
()	Disconnect the frequency counter from pin C.
()	Connect the Transceiver to a suitable antenna. Then readjust coil L210 on the receiver circuit board for the best audio quality of a received signal.

() Turn the Transceiver off.

ALIGNMENT WITH AN ACCURATE ON-THE-AIR SIGNAL

NOTE: Most repeaters are kept to tight frequency tolerances. It is desirable to use a repeater station in the next step, if possible.

()	Connect the Transceiver to a suitable antenna and set the frequency selector switches to the frequency of a station of known accuracy.
()	Turn the Transceiver on.
()	Adjust trimmer capacitor C435 on the synthesizer circuit board and coil L210 on the receiver circuit board for the best audio quality.
()	Turn the Transceiver off.

Transmitter Offset Oscillators

NOTE: You will now adjust the transmitter offset oscillators. Four methods are outlined below in the order of preference. Use the method that you can perform with your available equipment.

METHOD #1

NOTE: If your frequency counter will not operate as high as the 2-meter band, proceed to "Alternate Method."

()	Connect the 50 ohm dummy load to the ANT socket on the rear panel.
()	Set the frequency selector switches to 146.000 MHz.
()	Be sure the MODE switch is at SIM.

()	Connect an accurate frequency counter across the dummy load. CAUTION: Since as much as 30 volts may be present at the ANT socket, and many counters have a 2-volt maximum input, use a suitable attenuator or you may damage the counter. Consult the instruction book for your counter.	Ì)	Depress the microphone button and adjust trimmer capacitor C432 until the counter indicates the proper transmitter frequency. Turn the Transceiver off and disconnect the frequency counter from the dummy load.			
()	Turn the Transceiver on.						
NOTE: When you perform the adjustments in the next seven steps, adjust the trimmers as close as possible to the proper frequency.			Alternate Method				
			NOTE: The frequency counter you use for this adjustment must be capable of counting up to at least 25				
()	Depress the microphone button and adjust trimmer capacitor C425 on the synthesizer cir-	N	1H2	Z.			
	cuit board until the counter indicates 146.000,000 MHz.	()	Disconnect the white-brown wire from pin H on the transmitter circuit board.			
()	Place the MODE switch in the -600 position.	()	Connect the frequency counter probe to pin C on the synthesizer circuit board.			
()	Depress the microphone button and adjust trimmer capacitor C422 until the counter indi-	. ()	Turn the Transceiver on.			
	cates 145.400,000 MHz.	(1	Place the MODE switch in the SIM position.			
()	Place the MODE switch in the +600 position.	ľ	,	Tace the MODE switch in the 51M position.			
()	Depress the microphone button and adjust trimmer capacitor C428 until the counter indi-	()	Set the frequency selector switches to 146.000 MHz.			
	cates 146.600,000 MHz.	()	Depress the microphone button and adjust trimmer capacitor C425 until the counter indicates 24.333,333 MHz.			
	NOTE: Perform the next two steps only if you have an						
auxi	ciliary crystal installed at Y401.)	Release the microphone button.			
()	Place the MODE switch in the AUX position.	()	Place the MODE switch in the -600 position.			



()	Depress the microphone button and adjustrimmer capacitor C422 until the counter indicates 24.233,333 MHz.			
()	Release the microphone button.			
()	Place the MODE switch in the +600 position.			
()	Depress the microphone button and adjust trimmer capacitor C428 until the counter indicates 24.433,333 MHz.			
()	Release the microphone button.			
NOTE: Perform the next two steps only if you have an auxiliary crystal installed at Y401.					
()	Place the MODE switch in the AUX position.			
()	Depress the microphone button and adjust trimmer capacitor C432 until the counter indicates 1.000,000 MHz + f_{XTAL} (MHz).			
()	Release the microphone button.			
ſ)	Turn the Transceiver off.			

() Reconnect the white-brown wire to pin H on the transmitter circuit board.

METHOD #2

Use the facilities of a commercial two-way radio shop.

METHOD #3

Use a receiver of known frequency accuracy which has a metered discriminator. Tune the receiver to each transmit frequency and adjust each trimmer capacitor for an on-frequency indication.

METHOD #4

Adjust each trimmer capacitor for an acceptable modulation quality as judged by several other amateur radio operators.



DEVIATION ADJUSTMENT

If a deviation monitor meter is available, adjust control R119 on the transmitter circuit board for 4.5 to 5 kHz of FM deviation. A good way to accomplish this is to whistle a steady tone into the microphone.

If a deviation monitor meter is not available, preset control R119 halfway between 11 and 12 o'clock, as viewed from the knob side of the control. Use on-the-air checks with other amateur operators. Check with three or four stations to get a consensus of opinion on

recaptured audio in their receivers. NOTE: If the operator with which you are checking has an old, surplus, commercial piece of equipment, it may have been designed to receive 15 kHz FM deviation signals. In this case, you may get a report of low-level recaptured audio. Attempting to increase the deviation for this type of receiver will cause phase distortion or may even close the squelch on narrow bandwidth receivers designed for 5 kHz FM deviation signals.

TONE ADJUSTMENTS


NOTE: A frequency counter is required for the following adjustments.	 Depress the microphone button and adjust control R125 on the transmitter circuit board for the desired tone.
() Remove the white-brown wire from pin H on the transmitter circuit board.	() Place the TONE switch in position B.
() Connect a frequency counter to TP105 on the transmitter circuit board.	() Depress the microphone button and adjust con- trol R126 on the transmitter circuit board for the desired tone.
 Determine the continuous tone frequencies you desire. Consult a repeater directory, if neces- sary. 	() Place the TONE switch in position C.
NOTE: When you make the following adjustments, try to set each tone as accurately as possible. Most	 Depress the microphone button and adjust control R127 on the transmitter circuit board for the desired tone.
repeaters that use a tone are quite critical as to what frequency will key them.	() Turn the Transceiver off and disconnect the frequency counter.
() Place the TONE switch in position A.	() Reconnect the white-brown wire to pin H on the transmitter circuit board.

MICODER ADJUSTMENTS

If you purchased the Transceiver kit with the Micoder, proceed to that Manual and perform the "Adjustments."

This completes the alignment of your Transceiver. Proceed to "Final Assembly."



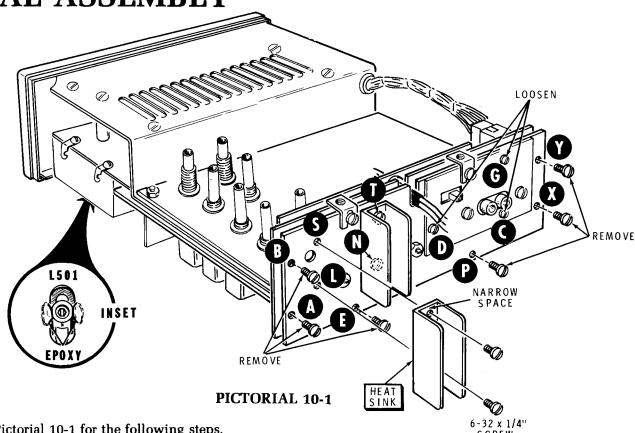

Refer to Pictorial 10-1 for the following steps.


() Position the chassis as shown.

NOTE: If you wish, you may install an auxiliary crystal at this time. Before you order crystals from a supplier, refer to "Aux Crystal Information" in the "Operation" section of this Manual.

- () Identify the two heat sinks and four $6-32 \times 1/4''$ screws. Note that one of the holes in each heat sink is closer to the edge.
- Rub silicone grease over the side of a heat sink that will be against the PA assembly. Then install the heat sink on the PA assembly with 6-32 \times 1/4" screws at N and T.
- () Similarly install the remaining heat sink with $6-32 \times 1/4''$ screws at L and S.
- () IMPORTANT: To suppress the radiation of harmonics and spurious frequencies, there must be very good contact between the rear panel, the PA circuit board, and the chassis. Therefore, use the end wrench to again tighten the six nuts and two studs on the foil side of the PA circuit board.

- () Remove the six $6-32 \times 1/4''$ screws at A, B, E, P, X, and Y in the PA assembly. Discard these screws.
- () Loosen the 4-40 \times 1/8" screws at C, D, and G. CAUTION: These screws are very short and can be loosened only slightly.
- () Turn the chassis right-side-up.
- () Use a soft cloth to wipe fingerprints etc. from around the hole where the coil extends from the VCO cover. Do not scrape or use any solvent.
- () Mix together the epoxy you saved from the VCO circuit board assembly.
- () Refer to the inset drawing and use a toothpick or similar object to put a bead of epoxy around coil L501. Use only enough epoxy to secure the coil form to the top VCO cover. Also put a small amount of epoxy around the edge of the coil slug to secure it at its proper adjustment.



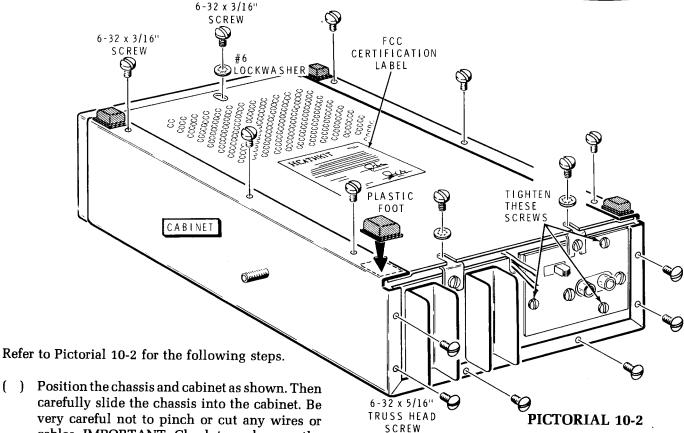


- carefully slide the chassis into the cabinet. Be very careful not to pinch or cut any wires or cables. IMPORTANT: Check to make sure the Squelch control terminals do not touch the underside of the cabinet.
- () Secure the chassis to the cabinet. Install six 6-32 × 5/16" truss head screws through the cabinet and into the PA assembly. It may be necessary to shift the position of the panel plate slightly so it is not pinched.
- () Tighten the three $4-40 \times 1/8''$ screws to secure the panel plate to the PA assembly.
- Refer to Detail 10-2A and slide the bottom plate into position between the chassis and the cabinet. Be very careful not to pinch or cut any wires or cables.
- () Secure the bottom plate to the cabinet with nine 6-32 × 3/16" screws. Use #6 lockwashers on the three indicated screws.
- () Read, sign, and date the FCC certification label. Then carefully peel away the backing paper and press the label onto the bottom plate as shown in the Pictorial.

NOTE: In the following steps, be sure each foot is properly positioned before you allow it to touch the metal.

- () Remove the backing paper from a plastic foot and press the foot into place on one corner of the cabinet, as shown.
- () Similarly, mount a plastic foot on each remaining corner of the cabinet.

This completes the "Final Assembly." Proceed to the "Installation" section of this Manual.

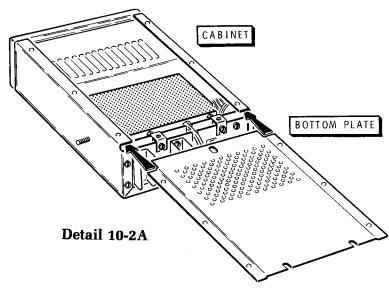



INSTALLATION

You can install this Transceiver in any location where a nominal 13.8 VDC supply is available (negative ground only). The usual power sources are a "12volt" battery system or a power supply that furnishes DC from an AC source. Read the "Power Supply" discussion in the "Operation" section of this Manual.


Most installations can be defined as either a "fixed station" or as a "mobile station," although many operators use their Transceivers in both fixed and mobile service. A Heathkit AC power supply is available for use with this Transceiver in fixed station service. Mating power supply connectors are furnished for connection to both fixed and mobile power supply outputs.

We recommend that you use a low-loss transmission line of known quality. Some inexpensive cables have high losses, which would cause poor efficiency. For mobile installation, a gimbal plate is included that provides a permanent mount for the gimbal bracket which holds the Transceiver. The plate has two sets of slots which provide versatility in the mounting position of the plate, and therefore the Transceiver. Both the gimbal bracket and the Transceiver can be easily removed. Plastic feet are provided for the gimbal bracket to protect supporting surfaces in fixed station when the gimbal bracket remains with the Transceiver.

Pictorial 11-1 (in the Illustration Booklet) shows a few positions in which you may mount the Transceiver in both fixed and mobile use.


CAUTION: When you connect your Transceiver to an antenna, DO NOT change any transceiver adjustments, as you have already aligned it to a 51 Ω load. All adjustments for antenna matching must be made to the antenna and transmission line, and NOT to the Transceiver.

GIMBAL BRACKET INSTALLATION

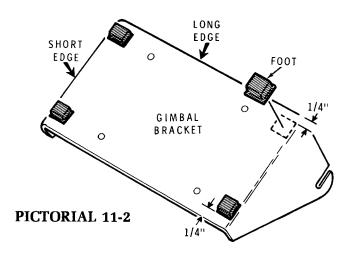


Refer to Pictorial 11-2 and turn the bracket upside down as shown. Then remove the paper backing from each of the feet and press them into place on the underside of the bracket. Be sure to keep 1/4" distance between the sides of the feet and the longer sides of ths bracket, as shown. The edges of the feet should be flush with the shorter edges of the bracket.



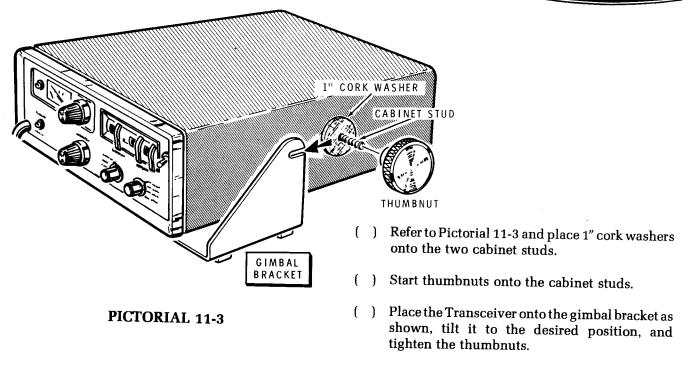


FIXED STATION INSTALLATION

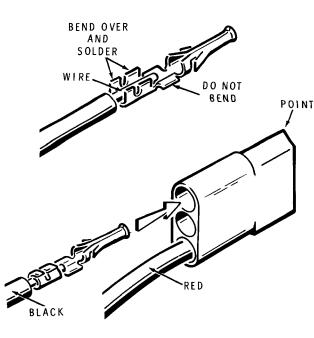

PICTORIAL 11-4


NOTE: In the following steps you will install a connector on the output wires of the Heathkit power supply for this Transceiver. The output has one red (positive) and one black (negative, or ground) wire.

- () If it has not already been done, remove 1/4" of insulation from the end of each of the power supply output wires. Twist the fine strands together and melt a small amount of solder on the bare wire ends.
- () Refer to Pictorial 11-4 and solder a female connector (#432-73) to the end of each of the two wires you prepared in the preceding step.
- () Position a male connector housing (#432-723) with the point up and push the female connector on the black wire into the upper hole, as shown, until the connector locks into place.
- Similarly, push the connector on the red wire into the lower hole; leave the center hole open.
- () Plug the power supply connector into the Transceiver power connector.

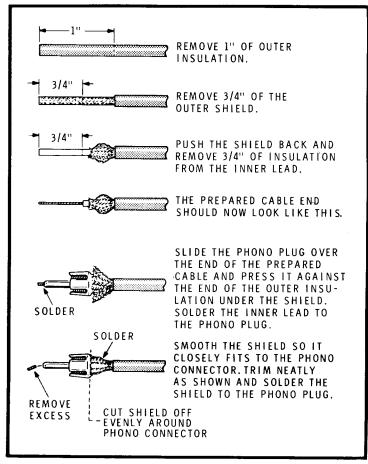

PICTORIAL 11-5

- () Refer to Pictorial 11-5 and, if it has not already been done, install a phono plug on your transmission line.
- () Connect the transmission line to the ANT connector on the rear panel.

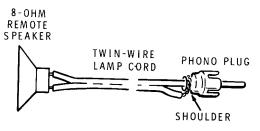

PICTORIAL 11-6

NOTE: Your Transceiver has an internal speaker. If you prefer, you can connect an external 8-ohm speaker to the Transceiver.


- () If you are going to use the Transceiver's internal speaker, push the rear panel slide switch to INT.
- If you are going to use an external speaker, refer to Pictorial 11-6 and install a phono plug on the speaker leads. Connect the plug to the SPKR socket on the rear panel, and push the rear panel slide switch to EXT.


This completes the "Fixed Station" installation instructions. If your are also going to use your Transceiver as a mobile station, proceed to the "Mobile Installation" section of this Manual. If you do not plan a mobile installation, proceed to the "Operation" section.

MOBILE STATION INSTALLATION

This section of the Manual will discuss the installation of the Transceiver in an automobile, but the same principles apply to installations in other types of conveyance, such as a boat, airplane, or snowmobile. Read the information before you install your Transceiver.

() Make sure that the voltage output of your battery charging system is at least 12.6 volts and that it does not exceed 16 volts under any circumstances. If the voltage is not within these limits, have the system adjusted. See the "Power Supply" discussion in the "Operation" section of this Manual.




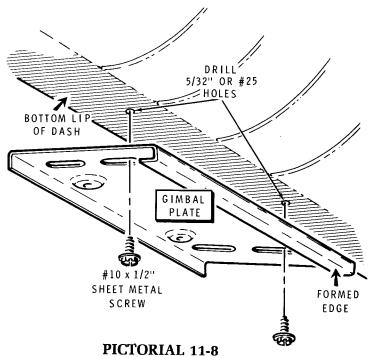

2. Decide upon the power wire routing path. You can run the red power wire through an existing opening in the fire wall direct to the battery. Alternately, there may be an unused circuit available on the accessory fuse block of your automobile, and the power can be taken from this source. The ignition switch will usually control the accessory circuit. Also determine where you will connect the black (ground) power wire.


NOTE: If you prefer, you can install an additional fuse in the red power wire near the battery. The in-line fuse already installed will protect the Transceiver in either fixed or mobile installations; but will not, for example, protect the battery should the power wire short-circuit to the fire wall.

- Determine the routing of the antenna transmission line.
- () Refer to Pictorial 11-7 (Illustration Booklet, Page 14), the "Installation X-Ray View," for a suggested arrangement of components and their interconnections. Then decide where and how you will mount your Transceiver. Look at Pictorial 11-1 (in the Illustration Booklet) for some under-the-dash mounting suggestions. A "home-brew" adapter could be made for the drive shaft hump, and the gimbal plate (or gimbal bracket) could be mounted on the adapter.
- 1. Pictorial 11-8 shows the gimbal plate, which can be permanently mounted in the automobile. This gives you the option of removing the gimbal bracket from the passenger compartment when the Transceiver is not mounted there. Pictorial 11-9 and 11-10 show how the gimbal bracket, the gimbal plate, and the Transceiver fit together. You can remove the Transceiver by loosening the thumbnuts (and pulling apart the power line connector). and you can remove the gimbal bracket by removing the thumbscrews. Of course, you can attach the gimbal bracket permanently to the automobile and not use the gimbal plate. However, it is often convenient to be able to remove the gimbal bracket.

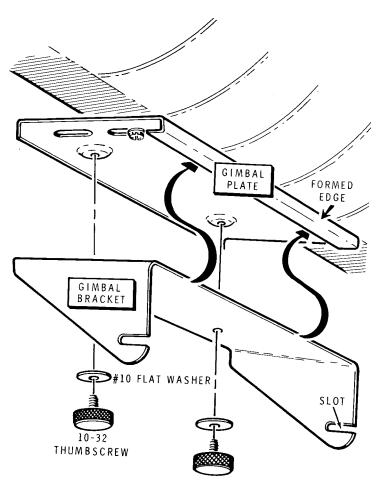

PICTORIAL 11-9



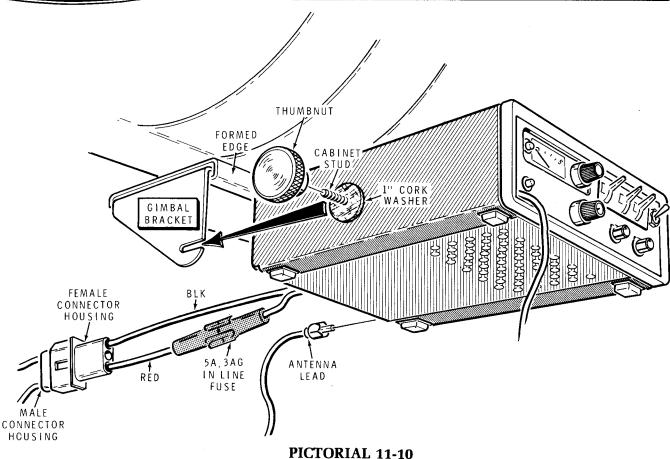

MOUNTING HARDWARE

- () If you are going to use the gimbal plate, refer to Pictorial 11-8 and use the gimbal plate as a template to drill two mounting holes in the lower lip of the dash. Use a 5/32" or a #25 bit.
- () Secure the gimbal plate to the dash with two #10 × 1/2" sheet metal screws. Use either pair of slots to position the plate as desired. NOTE: Four screws have been supplied in case they are needed in some installations.
- () Refer to Pictorial 11-9 and secure the gimbal bracket to the gimbal plate. Use #10 flat washers and 10-32 thumbscrews. The slots in the gimbal bracket may be toward the rear of the vehicle, if you prefer.

NOTE: Your Transceiver has an internal speaker. If you prefer, you can connect an external 8-ohm speaker to the Transceiver.

- If you are going to use the Transceiver's internal speaker, push the rear panel slide switch to INT.
- () If you are going to use an external speaker, refer to Pictorial 11-6 on Page 129 and install a phono lug on the speaker leads. Connect the plug to the SPKR socket on the rear panel, and push the rear panel slide switch to EXT.
- () Refer to Pictorial 11-10, loosen the two thumbnuts, insert the studs on the sides of the Transceiver into the slots in the gimbal bracket, and tighten the thumbnuts.



POWER WIRING


You can connect the power wire to the battery, although it is possible there is an unused terminal available on the accessory fuse block of your automobile. In this case, connect the red power wire to the unused terminal. (A 1/4" push-on connector is furnished. Any other type of connector you may require should be purchased locally.) The automobile ignition switch will usually control this circuit in the same manner as the other accessory circuits. To make sure the circuit is suitable, connect a voltmeter between the terminal and the automobile body and turn the ignition key to either "on" or to "accessory." If there is no voltage reading, check to make sure a fuse is actually installed.

On some automobiles, the starter relay terminal is a convenient place to obtain battery voltage. If you decide to use this connection, secure locally a solder lug which will fit the relay terminal.

If you used an AC power supply to align your Transceiver and are now making a mobile installation, install a male connector on the large red and large black power wires by performing the first four steps under "Fixed Station Installation" on Page 128. Then perform numbered steps 1 through 8 that follow.

If you used your 12-volt battery as a power source for the alignment of your Transceiver, you will already have the male connector housing installed on the red and the black power wires. In this case, perform only the following steps, but perform all of them.

- 1. () Remove and set aside the fuse from the Transceiver's fuseholder.
- 2. () Temporarily place the Transceiver in its permanent position.
- 3. () Plug the male connector on the power wires into the female connector on the Transceiver.
- () Route the red wire to your battery (or the accessory fuse block). Allow a little extra length for strain relief and cut the wire to length.

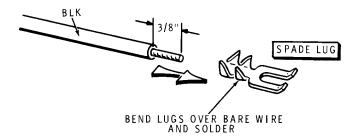


PICTORIAL 11-11

- 5. () Install the required type of connector on the red wire and connect it to your battery or the fuse block.
- 6. () Route the black wire from the power connector to the ground point you have selected. Allow a little extra length for strain relief and cut the wire to length.
- 7. () Refer to Pictorial 11-11 and install a spade lug (#259-22) on the end of the black wire and secure the lug to the ground point with a #6 sheet metal screw.
- 8. () Turn the VOLUME control counterclockwise until it clicks and then replace the fuse in the fuseholder.
- Turn the VOLUME control clockwise until it clicks. The meter face should light, indicating that you have correctly made your power connection.
- () Start your automobile engine.
- () Check for alternator whine in the receiver and transmitter.

NOTE: If alternator whine exists, refer to the ARRL Handbook or your local automotive garage for assistance in locating the problem.

() Turn the Transceiver off.



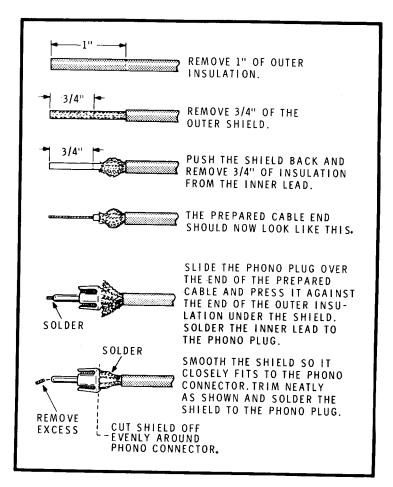

PICTORIAL 11-12


- () Refer to Pictorial 11-12 and install a phono plug on the transmission line coming from your antenna.
- () Push the phono plug into the ANT socket on the rear panel.

NOTE: A microphone clip and two #6 \times 3/8" sheet metal screws to mount it have been furnished. Mount the clip at a convenient location.





ANTENNAS

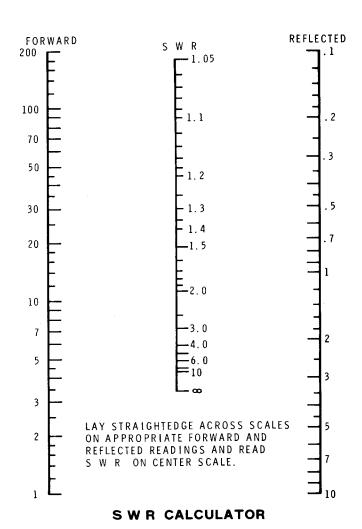

PICTORIAL 11-13

Two-meter antennas are available commercially from the Heath Company, and others, or you can construct your own. A discussion of antennas is beyond the scope of this Manual. Refer to the several good handbooks on the subject, one of which is the ARRL Antenna Book, available from most radio equipment dealers or from ARRL, 225 Main Street, Newington, CT. 06111. In the absence of an SWR (standing wave ratio) meter capable of accurate measurements at two meters, use a directional wattmeter for forward and reflected power readings. You can convert these readings to SWR by use of the SWR Calculator, Pictorial 11-13. The optimum SWR is 1, but you will obtain good results at any reading less than 2. Higher ratios will not damage this Transceiver but are undesirable from an operational standpoint.



OPERATION

CONTROLS AND CONNECTIONS

Refer to Pictorial 12-1 (Illustration Booklet, Page 14) for the location and functions of front and panel controls, connections, and adjustment access points.

SPEAKER

If you use an external 8-ohm speaker, connect it to the rear panel SPKR socket and push the rear panel speaker switch to EXT. If you use the built-in speaker, make sure the rear panel speaker switch is at INT.

MICROPHONE

Use only the microphone supplied with the Transceiver.

Depress the Microphone switch to activate the transmit circuits; release the switch to receive.

SIGNAL METER

The front panel meter shows relative transmitted signal strength and relative received signal strength.

SQUELCH

To adjust the SQUELCH control, first turn it fully counterclockwise. Turn the Transceiver on and set the VOLUME control so you hear background noise at average volume. Then turn the SQUELCH control knob clockwise until the noise just disappears. Setting the SQUELCH control further clockwise requires a stronger received signal to break the squelch.

CHANNEL ACTIVITY INDICATOR

The amber LED (to the left of the meter) lights whenever the receiver is unsquelched.

SYNTH LOCK INDICATOR

The red LED lights whenever the synthesizer is unlocked. It will normally light briefly when you change

frequency, switch from transmit to receive, or switch from receive to transmit.

MODE SWITCH

The SIM (Simplex) position provides transmitter and receiver operation on the displayed frequency. In the -600 mode, the transmitter operates 600 kHz below the receiver frequency. In the +600 mode, the transmitter operates 600 kHz above the receiver frequency. An AUX (Auxiliary) position is provided for an alternate frequency split, should you require one. Do not use this position if you have not installed an auxiliary crystal because the transmitter will not operate.

TONE SWITCH

Some repeaters require a subaudible continuous access tone. This switch allows you to select one of three tones (adjustable internally) or a no-tone (off) condition. This switch should normally be OFF when you use simplex operation.

CHANNEL SELECTION SWITCHES

Use the lever switches to select the 1 MHz, 100 kHz, and 10 kHz digits of the desired receive frequency. Use the toggle switch to select either 0 kHz or 5 kHz. The left-hand lever switch must be set to 4, 5, 6, or 7 (also 3 or 8 for CAP or MARS operation). The displayed frequency is always the receiver frequency, and will be the transmit frequency only when the Mode switch is in the SIM (Simplex) position.

NOTE: You must add the displayed frequency to 140 MHz to obtain the correct operating frequency.

Example: 6.940 = 146.940

CAUTION: In the +600 or -600 modes, the transmitter frequency is 600 kHz higher or 600 kHz lower, respectively, than the receiver frequency. You must use care to avoid out-of-band transmission in these modes. A similar condition exists in the auxiliary mode, if it is used.



POWER SUPPLY

A DC voltage between 12.6 volts and 16 volts will operate the Transceiver. The voltage can be furnished by an AC-operated power supply or a 12-volt system, such as an automobile battery. The supply must have a negative ground and be capable of at least 2.6 amperes output. For fixed station use, the Heathkit Model HWA-2036-3 will sufficiently power this Transceiver at normal line voltages.

CAUTION: Before you connect this Transceiver to mobile "12-volt" power source, check the voltage at the battery with the engine running above a fast idle. The voltage MUST NOT exceed 16 volts or the Transceiver may be damaged.

AUX (AUXILIARY) CRYSTAL INFORMATION

If you desire to add a crystal to the AUX position to provide an alternate transmitter offset frequency, you should supply the crystal manufacturer with the following information:

Required Frequency, calculate as follows:

Example: For an offset of +400 kHz (transmitter .4 MHz higher than receiver),

$$f_{XTAL} = 23.3333 \text{ MHz} + \frac{.4 \text{ MHz}}{6} = 23.3999 \text{ MHz}.$$

Note that for negative offsets (transmitter below the receiver frequency), the required crystal frequency will be below 23.3333 MHz. In other words, you should change the plus (+) sign in the above formula to a minus (-).

Frequency tolerance = $\pm .002\%$ or better

at 25°C.

Crystal type = Fundamental

Load Capacity = 23 pF.

Series Resistance = $40 \Omega \text{ max}$. (0°C to 60°C).

Stability = ± 10 parts per million

(0° to 50°C).

Holder = HC-25U.

Holder pin size = .040'' dia.

Holder pin spacing = .192".



NORMAL OPERATING CHARACTERISTICS

- 1. The relay will click when you turn the Transceiver on.
- 2. When you depress or release the microphone button, the Synth Lock lamp should light briefly.
- If you attempt to operate outside the band, and the jumper is installed on the synthesizer circuit board, the relay will click briefly before lock-out is established.
- 4. The Channel Activity lamp may light briefly when you depress or release the microphone button.

- 5. The time required to achieve lock will vary across the band due to changing loop parameters.
- 6. Without modulation, a low level tone may be detected on your transmitted carrier.
- 7. A microphonic condition may occur at a few frequencies with the VOLUME control at a high setting and the Transceiver unsquelched but not receiving a signal. This will not affect the performance under normal operating conditions.



IN CASE OF DIFFICULTY

Begin your search for any trouble that occurs after assembly by carefully following the steps listed below in the "Visual Tests." After you complete the "Visual Tests" refer to the Troubleshooting Charts.

NOTE: Refer to the "Circuit Board X-Ray Views" on Page 150 for the physical location of parts on the circuit board.

VISUAL TESTS

- Recheck the wiring. Trace each lead with a colored pencil on the Pictorial as you check it. It is frequently helpful to have a friend check your work. Someone who is not familiar with the unit may notice something that you have consistently overlooked.
- 2. About 90% of the kits that are returned to the Heath Company for repair do not function properly due to poor connections and soldering. Therefore, you can eliminate many troubles by reheating all connections to make sure they are soldered as described on Pages 28 and 29. Be sure there are no solder "bridges" between circuit board foils.
- Check to be sure all transistors and diodes are in their proper locations. Make sure each lead is connected to the proper point. Make sure that each diode band is positioned above the band printed on the circuit board.
- 4. Check electrolytic capacitors to be sure their positive (+) mark is at the correct position.
- 5. Check to be sure that each IC is properly installed in its socket, and that the pins are not bent out or under the IC. Also be sure the IC's are installed in their correct positions.


- 6. Check the values of the parts. Be sure in each step that you wired the correct part into the circuit, as shown in the Pictorial. It would be easy, for example, to install a 22 k Ω (red-red-orange) resistor where a 2200 Ω (red-red-red) resistor should have been installed.
- Check for bits of solder, wire ends, or other foreign matter which may be lodged in the wiring.
- 8. Look between each circuit board and the chassis to be sure all leads were cut off short.
- 9. A review of the "Circuit Description" may also help you determine where the trouble is.

If you have still not located the trouble after the "Visual Tests" are completed, and a voltmeter is available, check voltage readings against those shown on the Schematic Diagram. Read the "Precautions for Troubleshooting" before you make any measurements. NOTE: All voltage readings were taken with a high impedance voltmeter. Voltages may vary as much as $\pm 20\%$.

NOTE: In an extreme case where you are unable to resolve a difficulty, refer to the "Customer Service" information inside the rear cover of this Manual. Your Warranty is located inside the front cover.



PRECAUTIONS FOR TROUBLESHOOTING

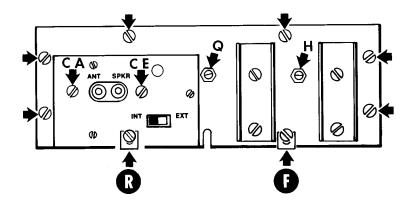

PICTORIAL 13-1

- Use caution when you test IC and transistor circuits. Although they have almost unlimited life when used properly, they are much more vulnerable to damage from excessive voltage or current than other circuit components.
- 2. Be sure you do not short any terminals to ground when you make voltage measurements. If the probe should slip, for example, and short across terminals or voltage sources, it is very likely to cause damage to one or more IC's, transistors, or diodes.

PA CIRCUIT BOARD ACCESS

To gain access to the component side of the power amplifier circuit board after initial assembly, refer to Pictorial 13-1 and proceed as follows.

Dissassembly

- () Remove the 6-32 screws at CA and CE.
- () Hold the flats in the ends of the transistor studs with pliers to keep them from turning, and use the end wrench to remove the two 8-32 shoulder nuts from the transistor studs at H and Q.
- () Remove the eight 6-32 screws that hold the rear panel to the eight studs.

() Lift off the rear panel.

Reassembly

- () Place the rear panel over the studs so the eight panel holes are aligned with the holes in the studs.
- () Turn the 8-32 nuts (which remained on the transistor studs) down against the transistors.
- () Start the eight 6-32 × 1/4" screws into the studs. Tighten these screws firmly, but do not overtighten them. NOTE: You will remove six of these screws when the cabinet is installed.
- () Insert two 6-32 \times 1/4" screws at CA and CE.
- () Reach in between the rear panel and the component side of the circuit board with a screwd-river and turn the 8-32 nuts on the transistor studs so they are snug against the back of the rear panel. DO NOT use the end wrench.
-) Replace the two 8-32 nuts on the transistor studs at H and Q. Again hold the end of the studs with pliers and tighten these nuts with the end wrench but DO NOT overtighten them, as the threads of the brass studs can be damaged.



CHECKING TRANSISTORS AND DIODES

SILICON BIPOLAR TRANSISTORS

To check a transistor accurately, you should use a transistor tester. However, if one is not available, you can use an ohmmeter to determine the general condition of any one of the bipolar transistors in this kit. The ohmmeter you use must have at least 1 volt DC at the probe tips to exceed the threshold of the diode junctions in the transistor you are testing. Most vacuum tube voltmeters meet this requirement.

To check a transistor with an ohmmeter, proceed as follows:

- 1. Remove the transistor from the circuit.
- 2. Set the ohmmeter to the $R \times 1000$ range.
- 3. Connect one of the ohmmeter test leads to the base (B) of the transistor. Touch the other meter lead to the emitter (E) and then to the collector (C). Both readings should be the same, but may be either high or low. If one reading is high and the other low, the transistor should be replaced. (Use the Identification Chart on Page 154 to identify the transistor leads.)
- 4. Interchange the test leads and repeat step 3.

NOTE: In the unusual case when the readings are all low, or all high, no matter which ohmmeter lead is connected to the base, the transistor should also be replaced.

MOSFETs

Insulated gate type MOSFETs are used at Q201, Q203, and Q205 on the receiver circuit board and at Q408 on the synthesizer circuit board. Usually, any defect in these devices is an internal short circuit between the source and one of the gates. You can check them in the circuit with a high impedance voltmeter (10 megohms or higher). An abnormally low source voltage may indicate an internal short circuit.

DIODES

To check a diode, unsolder one end from the circuit board, pull the lead up and out of the circuit board hole, and proceed as follows:

- 1. Set the ohmmeter to the $R \times 1000$ range.
- 2. Connect one of the ohmmeter test leads to the lead at the cathode (banded) end of the diode. Connect the other test lead to the other diode lead. Note the meter reading. Then interchange the meter leads and take another reading. One reading should be high and the other low (at least 10:1). If both readings are either high or low, the diode should be replaced.



TROUBLESHOOTING CHARTS

The following charts list the "Condition" and the "Possible Cause" or "Troubleshooting Procedure" of a large number of malfunctions. If a particular part or parts are mentioned (transistor Q112, for example, or switch SW7) as a possible cause, check these parts to see if they are wired or installed incorrectly. Also

check to see if an improper part was installed at that location. It is also possible, on rare occasions, for a part to be faulty.


NOTE: A synthesizer troubleshooting chart is located on Page 15 in the Illustration Booklet.

TRANSMITTER PROBLEMS

CONDITION	POSSIBLE CAUSE
No meter indication at TP101 (synthesizer locks okay).	 Q101. L101 and L102 not adjusted properly.
No meter indication at TP102; TP101 okay.	 Q102. L103 and L104 not adjusted properly.
No meter indication at TP103; TP102 okay.	 Q103. L105 not adjusted properly.
No meter indication at TP104; TP103 okay.	 L106 and L107 not adjusted properly. D101. Cable shorted at P102.
No transmitter power output; TP104 okay and relay pulls in.	 Q301, Q302. Trimmer capacitors C301, C302, C303, C305, C308, misadjusted.
Relay does not close when the microphone button is pressed.	 Microphone cable wired incorrectly. Q409, Q413, Q414. S301 wired wrong.
Relay closes when microphone button is pressed, but quickly drops back out.	 Synthesizer unlocking. Outside band (jumper installed in synthesizer circuit board).
Relay is continuously energized.	 D407 shorted. Q414 shorted.
Meter indicates output, dummy load remains cold. PA tuning is critical.	 Antenna socket not soldered on both sides of circuit board. Relay K301 defective.
No voice or tone modulation; power output okay.	 Relay contacts. Socket S301 wired wrong. VD501.
No voice modulation; tone okay.	 IC101. Microphone cable wired wrong or shorted. Green shielded cable shorted.
No tone modulation; voice okay.	 IC102. Switch SW2.



RECEIVER PROBLEMS

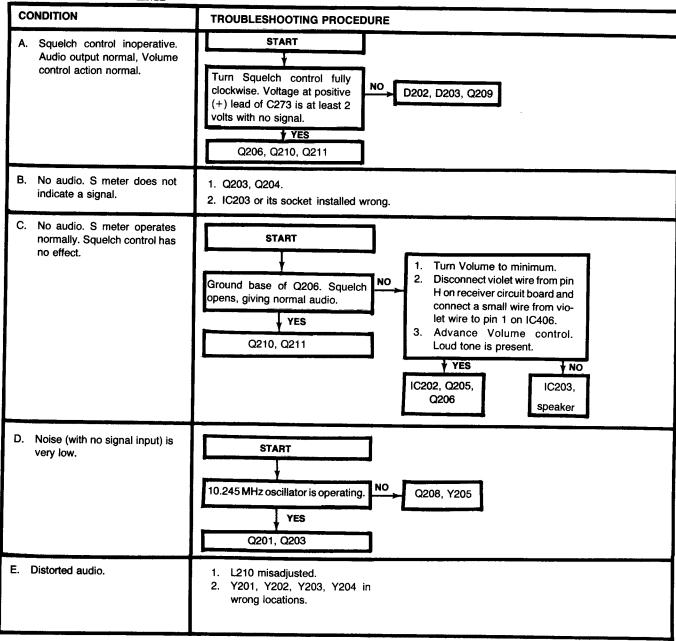



SPECIFICATIONS

RECEIVER

Sensitivity	12 dB SINAD* (or 15 dB of quieting) at .5 μ V.
Squelch threshold	$0.3~\mu V$ or less.
Audio Output	1.5 watts at less than 10% THD; 2 watts maximum
Image Rejection	output (typical). —45 dB or greater.
Spurious Rejection	-50 dB or greater.
IF Rejection	-80 dB or greater.
Internally Generated Spurious Signals	Below 1 μV equivalent (except at 144, 146, and 148 MHz).
Bandwidth	6 dB at 15 kHz minimum and 60 dB at 30 kHz maximum.
Modulation Acceptance	7.5 kHz, minimum.

*SINAD = Signal + noise + distortion

Noise + distortion



TRANSMITTER

 Power Output
 10 watts minimum to a 50 Ω load (13.8 VDC, 25°C).

 Spurious and Harmonic Output
 -60 dB.

 Modulation
 FM, 0-7.5 kHz, adjustable.

 Duty Cycle
 100% with infinite VSWR.

 Tone Encoder
 3 tones, 70 to 200 Hz, approximately 700 Hz deviation.

0 (simplex), -600 kHz, +600 kHz with crystals supplied. Provision for one other offset crystal.

GENERAL

Transmitter Offset

Frequency Coverage Any 4 MHz segment from 143.5 to 148.5 MHz. (Transmitter lockout can be defeated for out-of-band operation.) Offset must not exceed ±1 MHz. Frequency Increments 5 kHz. ± .0015%. Operating Temperature Range 15 to 125 degrees F (-10 to +50 degrees C). 12.6 to 16 VDC (13.8 VDC, nominal). Receive Mode: 700 mA maximum, squelched. Transmit Mode: 2.6 amperes maximum at 13.8 VDC. Dimensions 2-3/4" high \times 8-1/4" \times 9-7/8" deep (7.1 \times 21 \times 24.5 cm). Weight 2.25 lbs (2.83 kg).

The Heath Company reserves the right to discontinue products and to change specifications at any time without incurring any obligation to incorporate new features in products previously sold.



CIRCUIT DESCRIPTION

Refer to the Block Diagram (Illustration Booklet, Page 16) and the Schematic while you read this "Circuit Description." The part numbers are arranged in the following groups to help you locate specific parts on the Schematic, circuit boards, and chassis.

99 Pa	rts mounted on the chassis.
	rts mounted on the transmitter cuit board.
	rts mounted on the receiver cuit board.
	rts mounted on the power aplifier circuit board.
0-499 Pa	rts mounted on the synthe- er circuit board.
	rts mounted on the VCO cuit board.
siz 0-599 Pa	er circuit board. rts mounted on the VCO

The voltage controlled oscillator (VCO), which is the heart of this Transceiver, provides the proper frequencies for the transmitter and receiver injection. The VCO is part of a phase-locked loop, called a frequency synthesizer, which determines the frequency of the VCO and holds it as stable and accurate as a crystal-controlled oscillator. Three lever-operated binary-coded decimal switches and a 0/5

kHz miniature toggle switch select the receiver frequency you desire. A four position rotary switch allows you to select the transmitter offset frequency so that the transmitter automatically tracks the receiver. The frequency of the VCO is varied in step with the output of the transmitter audio stages (on the transmitter circuit board) to cause modulation.

The receiver mixes the incoming signal at the antenna with the sixth harmonic of the VCO signal. The resulting 10.7 MHz IF signal is filtered by an 8-pole crystal filter, amplified, and mixed with the output of a crystal-controlled oscillator to produce a 455 kHz IF signal. The transmitted audio is recovered from this IF signal by means of a quadrature detector. This audio signal is then amplified to a level sufficient to drive the speaker.

The transmitter multiplies the VCO output frequency by a factor of six and steps up the power to the level required to drive the power amplifier.

The power amplifier boosts the RF signal coming from the transmitter circuit board to provide a minimum of 10 watts of RF power, which is coupled to the antenna.



SYNTHESIZER

GENERAL

The synthesizer circuit board receives an 833.333 Hz reference signal from the transmitter circuit board and also the output signal from the voltage-controlled oscillator (VCO) on the VCO circuit board. The frequency of the signal coming from the VCO circuit board is one-sixth the desired transmitter frequency in the transmit modes, and is automatically switched in the receive mode so that, when multiplied by six, it provides a receiver injection signal that is 10.7 MHz below the receive frequency selected on the front panel switches.

The accuracy and stability of the VCO are proportional to the combined accuracy and stability of two temperature-compensated, crystal-controlled oscillators. One of these oscillators operates at 10 MHz and provides the 833.333 Hz reference signal. The other oscillator (offset oscillator) operates in the 20 MHz range. The VCO is phase-locked to these two oscillators. If the VCO becomes unlocked, the red "Synth Lock" LED will light. If this unlocked condition lasts for more than about one-half second, the transmitter is automatically disabled to prevent operation outside the band. This inhibit circuitry also disables the transmitter if the front panel switches are set below 144.000 MHz or above 147.995 MHz. This feature can be defeated if you desire to operate on MARS or CAP frequencies.

Transistor Q402 mixes the output of the offset oscillator (Q406) with the output of the VCO. A low-pass filter, consisting of C404 and L401 passes the difference signal to Q401 where it is shaped to be compatible to drive a programmable divider formed by IC401 through IC404. When the VCO is on the frequency that corresponds to that selected on the front panel switches, the output of the programmable divider is 833.333 Hz. If the VCO is not on the correct frequency, the output of the programmable divider is other than 833.333 Hz, which is required for lock.

IC406 compares the output frequency of the programmable divider to the 833.333 Hz reference. If they are equal, the tune voltage to the VCO remains unchanged and IC406 phase-locks the loop. If they are not equal, the phase-frequency detector, IC406, puts out pulses which are integrated (averaged) by loop filter Q404. This changes the tune voltage in the proper direction to tune the VCO toward the correct frequency and brings the output of the programmable divider toward 833.333 Hz (establishing the locked condition).

PROGRAMMABLE DIVIDER

The programmable divider, (see Figure 1) consists of IC401, IC402, IC403, and IC404. IC401, IC402, and IC403 are cascaded programmable, decade down-counters. The divisor, which is the number selected

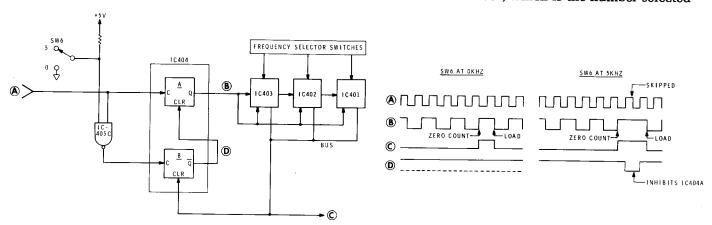


Figure 1



on the front panel switches, is "loaded" into the counters on the indicated negative edge, and each subsequent positive edge decrements this number by one. For example, if 6.94 (146.94 MHz) is selected, a 6 is loaded into IC401, a 9 into IC402, and a 4 into IC403. This makes the divisor 694. After 694 cycles have been counted, the "buss" line (common line between pins 12) goes high briefly. The resulting series of positive pulses on the bus line is the output of the programmable divider.

Flip-flop IC404A, just ahead of the cascaded counters, multiplies the total divisor by 2 which, in the example given, makes the total divisor $2\times694=1388~(0/5~\text{kHz}$ switch is in the 0 kHz position). In the simplex (SIM) mode, the offset oscillator is operating at 23.333 MHz. If this is mixed with the required VCO frequency of 24.49 MHz (146.94 MHz/6), a difference frequency of 1.1567 MHz is obtained. If this difference is divided by 1388 (2 \times 694), the result is 833.333 Hz, as required for lock.

If the 0/5 kHz switch is set to the 5 kHz position, the total divisor must increase by one to 1389 (2 \times 694.5). This is accomplished by disabling IC404A during the cycle which just follows the positive edge of the buss output. In effect, IC404B counts the extra cycle and "hides" it from IC404A.

OFFSET OSCILLATOR

The offset oscillator is formed by Q406 and the associated circuitry. In the receive mode, the required oscillator frequency is 21.55 MHz. This crystal (Y405) is switched in by D406, which is turned on by Q412. Q412 conducts due to the 13.8 volts present on pin U via the relay coil.

In the transmit mode, the push-to-talk switch removes the base bias from Q413, which allows Q414 to turn on and energize the relay. Q411 and Q412 turn off and Q410 conducts, which switches in the appropriate transmitter offset crystal as selected by the front panel Mode switch, SW7.

OUT-OF-LOCK/BAND DETECTION AND TRANSMIT INHIBIT

Whenever the phase-locked loop is not locked, negative pulses will appear on one of the two inputs to IC405A. The active input is determined by whether

the output of the programmable divider is higher or lower than the 833.333 Hz reference. Positive pulses at the output of IC405A charge capacitor C421, which turns on Q405. When Q405 is turned on, it applies a low to pin 4 of IC405B, which causes its output to go high and turn on Q409. Q409 prevents Q414 from turning on when you press the PTT switch and thus inhibits the transmitter. The low on pin 4 of IC405B is also applied to Q407, which turns it off and allows Q408 to light the Synth Lock LED.

If the 1 MHz lever switch (SW3) is set to a number other than 4, 5, 6, or 7, the "4" output of the switch is grounded. This grounds pin 5 of IC405B and inhibits the transmitter as was described in the above paragraph. This helps prevent you from operating outside the 2-meter amateur band. (Out-of-band transmissions can still occur when the selected receive frequency is within the band, but the offset transmitter frequency is not.) If MARS or CAP operation is desired, you can remove the jumper on the synthesizer circuit board to disable the out-of-band inhibit feature.

R448, R449, and C443 briefly delay the inhibit circuitry to allow the synthesizer to lock on different frequencies in transmit and receive. The delay gives the loop a chance to lock when the Transceiver switches from receive to transmit. This transition typically takes less than 150 mS, but if the loop does not re-lock within approximately 500 mS, the transmitter inhibit circuitry releases the relay.

IC502, an ECL (emitter-coupled logic) integrated circuit, is the heart of the VCO. It is tuned by L501, C513, and varactor diode VD502. In the receive mode, Q502 switches in C509 and C511 which lower the frequency range by the required amount. In transmit, frequency modulation is accomplished by applying the transmitter audio to a second varactor diode, VD501. This assures constant deviation over the entire frequency range.

Q503 and Q504 make up a low-pass filter, which helps remove any residual 833.333 Hz reference from the tune voltage.

IC501, a separate 5-volt regulator, is included on the VCO circuit board. This regulator supplies only the oscillator IC and loop filter and thus helps to isolate the analog circuitry from the digital circuitry.



RECEIVER

The signal from the antenna passes through a double-tuned circuit to RF amplifier Q201. The output of Q201 is again double-tuned and then mixed by Q202 with the injection signal from Q207. This injection signal is 10.7 MHz below the selected receive frequency.

The 10.7 MHz IF output from Q202 passes through an 8-pole crystal bandpass filter to IF amplifier/limiter IC201. The output of this filter is mixed by Q203 with a 10.245 MHz signal from crystal oscillator Q208 and produces a 455 kHz IF signal.

The 455 kHz IF signal is amplified by Q204, which drives quadrature detector IC202. The output of Q204 is also rectified by D201 to produce an indication of relative signal strength on the S meter.

The recovered audio from IC202 passes through a filter, consisting of L211 and C237, which removes any remaining 455 kHz IF signal. The audio is preamplified by Q205 and then passes through the Volume control and a de-emphasis network to audio amplifier IC203, which drives the speaker.

The high frequency (noise) component of the audio signal passes through the Squelch control to squelch noise amplifier Q209. The amplified noise is then rectified by D202 and D203. When the resulting DC voltage is of a sufficient level, it will trigger the Schmitt trigger formed by Q210 and Q211. When triggered, the collector of Q211 is high and turns on Q206. This pulls the emitter of Q205 high, turning it off, and squelches the reciever. When the receiver is unsquelched, Q212 does not conduct, which allows Q213 to light the Channel Activity LED.

The audio output coming from IC203 is routed to the speaker through the PA circuit board where it is grounded in the transmit mode by a pair of relay contacts. SW301 selects either the internal speaker or an optional external 8-ohm speaker.

TRANSMITTER

MICROPHONE AMPLIFIER

The microphone audio passes through C128 to two cascaded amplifier stages in IC101. The values of R112 and C128 were chosen so any audio frequencies below 3 kHz are attenuated at a 6 dB-per-octave rate and thus provides pre-emphasis. Pre-emphasizing the audio at the transmitter and de-emphasizing it in the receiver results in a higher signal-to-noise ratio.

IC101B saturates on relatively low levels of speech and causes symmetrical clipping of the audio peaks. This limits the possible deviation for a given setting of the Deviation control. This type of limiting produces harmonics of the voice frequencies which must be eliminated. The network following the Deviation control is a post-limiter roll-off network which attenuates these higher frequencies.



TONE OSCILLATOR

The subaudible tones that are required to access some repeaters are generated by IC102 which is an astable multivibrator. Three separate tones may be set by multiturn controls R125, R126, and R127. Since the output of this IC is a square wave that contains many undesired harmonics, a roll-off network is also used here.

TRANSMITTER RF STAGES

The output signal from the VCO circuit board is coupled through a double-tuned circuit to tripler Q101. The output is again double-tuned and then doubled by Q102. The output of Q102 is amplified by Q103 to the level required to drive the PA.

Test points TP101, TP102, and TP103 provide a means of measuring the relative drive level to each stage. TP104 provides an indication of the output from the entire transmitter chain.

REFERENCE OSCILLATOR AND DIVIDERS

IC103A and IC103D together with Y101 form a stable 10 MHz oscillator whose output is buffered by IC103C. IC104, IC105, and IC106 divide the signal by 1000 and IC107 divides it by 12. The resulting 833.333 Hz is buffered by IC103B and provides the reference source for other circuits in the radio.

The network consisting of C146, C147, C148, and R139 provides a terminated, variable-signal source of 1 MHz harmonics for use as a receiver alignment aid if a signal generator is not available.

HASH FILTER/REGULATOR

The line coming from the power source is filtered by C151, L108, C152, and C153 to eliminate noise such as alternator whine and ignition noise.

D102 provides protection for the Transceiver against the reversed supply polarity, which causes D102 to conduct and blow the fuse. Q104 is a conventional series regulator that provides 11 volts. IC1 is a chassis-mounted, 5-volt regulator which supplies all the digital intergrated circuits in the transceiver.

POWER AMPLIFIER

C301, C302, and L301 (a printed circuit coil) match the input of the power amplifier circuit to the impedance of the signal coming from the transmitter.

C303, C304, C305, and L302 (another printed circuit coil) provide matched interstage coupling between Q301 and Q302.

L303, C308, and C309 match the impedance of the output of Q302 to the 50 Ω antenna output. C311, C312, C313, L304, and L305 form a low-pass filter for the output circuit of Q302.

The output signal is routed through relay K301 to the antenna socket on the rear panel of the Transceiver.


D301 rectifies a sample of the RF output so the S meter can provide an indication of relative power output.



CIRCUIT BOARD X-RAY VIEWS


NOTE: To find the PART NUMBER of a component for the purpose of ordering a replacement part:

- A. Find the circuit component number (R5, C3, etc.) on the X-Ray View.
- B. Locate this same number in the "Circuit Component Number" column of the "Parts List."
- C. Adjacent to the circuit component number, you will find the PART NUMBER and DESCRIPTION which must be supplied when you order a replacement part.




VCO CIRCUIT BOARD (Shown from component side. Foil on component side is shown in red.)



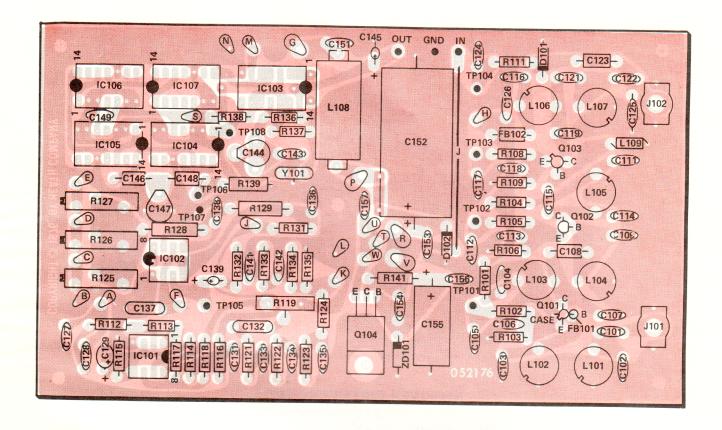


TRANSMITTER CIRCUIT BOARD (Shown from component side.

Foil on component side is shown in red.)

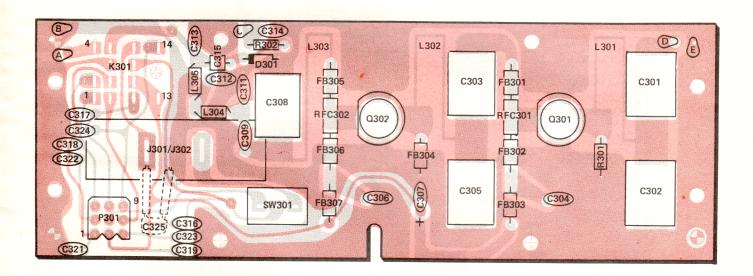


POWER AMPLIFIER CIRCUIT BOARD (Shown from component side. Foil on component side is shown in red.)



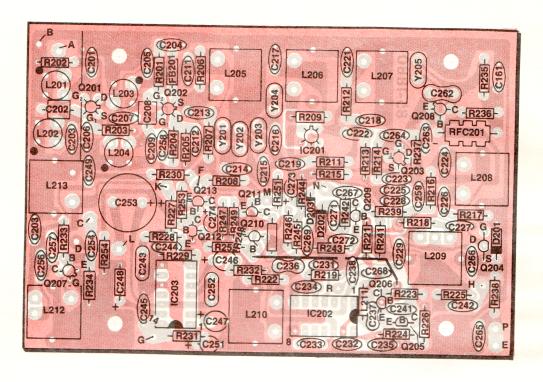

RECEIVER CIRCUIT BOARD (Shown from component side. Foil on component side is shown in red.)

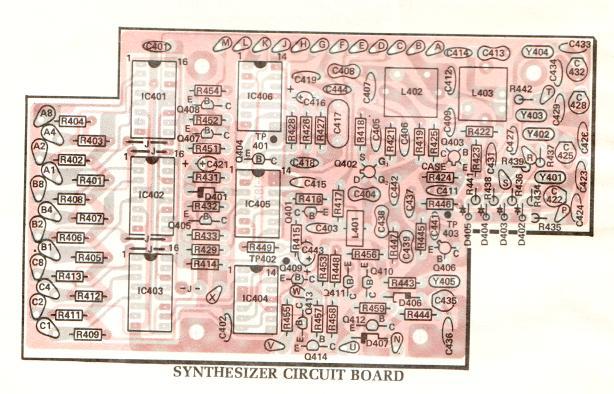

Foil on component side is shown in red.)



IDENTIFICATION CHARTS

DIODES

HEATH PART NUMBER	MAY BE REPLACED WITH	CIRCUIT COMPONENT NUMBER	IDENTIFICATION
56-24	I N 458	D402, D403, D404, D405, D406	NOTE: HEATH PART NUMBERS ARE
56-26	IN191	D202, D203	STAMPED ON MOST DIODES.
56-56	IN4149	D101, D201, D301, D401	
56-57	IN716A	Z D 1 0 1	
56-77	FV1010	V D 5 0 1	
57-27	IN 2071	D102	BAN DED EN D
57-65	I N 4 0 0 2	D407	DANDED END
56-640	MV2110	V D 502	ANODE



TRANSISTORS

HEATH PART NUMBER	MAY BE REPLACED WITH	CIRCUIT COMPONENT NUMBER	BASING DIAGRAM	
417-134	M P S 6520	Q 50 2	E	A
417-154	2N2369	Q208,Q414	Α	C B FLAT
417-175	2N 5294	Q104	С	**. B
417-205	2N3866	Q103	Α	S D G
417-240	40673	Q402	G	C
417-241	EL131	Q204	В	B C E
417-290	MRF502	Q101,Q207,Q403	D	CASE
417-293	2N5770	Q102	E	C B E FLAT
417-801	M PSA 20	Q205, Q206, Q209, Q210, Q211, Q212, Q213, Q401, Q404, Q405, Q407, Q408, Q409, Q410, Q411, Q412, Q413, Q501, Q503	E	E B C
417-803	2N6081 OR B12-12	Q302	F	c* E
417-804	2N6080 OR B3-12	Q301	F	F F
417-863	MFE131	Q201, Q202, Q203	G	G
417-865	M P S A 55	Q504	E	G_{2}

 $f{st}$ THE COLLECTOR LEAD IS CUT ON AN ANGLE.

 $[\]ensuremath{^{\star\star}}$ The source and the drain are electrically the same and may be interchanged.



INTEGRATED CIRCUITS

HEATH PART NUMBER	MAY BE REPLACED WITH	CIRCUIT COMPONENT NUMBER	IDENTIFICATION
442-21	M C 1458 O R N E 5558 V	1 C 1 O 1	
442-53	NE 555 V	I C102	
442-20	UA703	I C 2 0 1	
442-54	U A 7805	101	OR OR OND OUT
442-627	78L05	I C 5 0 1	OUT
442-28	M C 1357 P	I C 2 0 2	
442-610	TBA820	I C 2 0 3	
443-1	SN7400N	IC103, IC405	
443-5	S N 7 4 7 3 N	I C404	Demonator 1
443-7	SN7490N	10104,10105,10106	
443-34	SN7492N	I C107	1
443-62	M C 4044 P	I C 4 0 6	
443-740	M C 1648 P	I C 502	
443-61	M C 4016 P	IC401, IC402, IC403	

FOR PARTS REQUESTS ONLY

- Be sure to follow instructions carefully.
- Use a separate letter for all correspondence.
- Please allow 10 14 days for mail delivery time.

DO NOT WRITE IN THIS SPACE

INSTRUCTIONS

- Please print all information requested.
- Be sure you list the correct HEATH part number exactly as it appears in the parts list.
- If you wish to prepay your order, mail this card and your payment in an envelope. Be sure to include 10% (25¢ minimum, \$3.50 maximum) for insurance, shipping and handling. Michigan residents add 4% tax.

Total enclosed \$____

 If you prefer COD shipment, check the COD box and mail this card.

NAME	
ADDRESS	
CITY	
STATE	ZIP

The information requested in the next two lines is not required when purchasing nonwarranty replacement parts, but it can help us provide you with better products in the future.

Invoice #

Location

Purchased	Purchased		
LIST HEATH PART NUMBER	QTY.	PRICE EACH	TOTAL PRICE
			·

TOTAL FOR PARTS

Model #

Date

HANDLING AND SHIPPING

MICHIGAN RESIDENTS ADD 4% TAX

TOTAL AMOUNT OF ORDER

SEND TO:

HEATH COMPANY

BENTON HARBOR MICHIGAN 49022

ATTN: PARTS REPLACEMENT

Phone (Replacement parts only): 616 982-3571

THIS FORM IS FOR U.S. CUSTOMERS ONLY OVERSEAS CUSTOMERS SEE YOUR DISTRIBUTOR

FOR PARTS REQUESTS ONLY

- Be sure to follow instructions carefully.
- Use a separate letter for all correspondence.
- Please allow 10 14 days for mail delivery time.

DO NOT WRITE IN THIS SPACE

INSTRUCTIONS

DOTTED

ALONG

- Please print all information requested.
- Be sure you list the correct HEATH part number exactly as it appears in the parts list.
- If you wish to prepay your order, mail this card and your payment in an envelope. Be sure to include 10% (25¢ minimum, \$3.50 maximum) for insurance, shipping and handling. Michigan residents add 4% tax.

Total enclosed \$_____

 If you prefer COD shipment, check the COD box and mail this card.

NAME		
ADDRESS		
CITY		
STATE	ZIP	

The information requested in the next two lines is not required when purchasing nonwarranty replacement parts, but it can help us provide you with better products in the future.

Model # Date Purchased	Invoice # Location Purchased		
LIST HEATH PART NUMBER	QTY.	PRICE EACH	TOTAL PRICE
TOTAL FOR PARTS			
HANDLING AND SHIPPING			
MICHIGAN RESIDENTS ADD	0 4% TAX		
TOTAL AMOUNT OF ORDE	R		

SEND TO:

HEATH COMPANY

BENTON HARBOR MICHIGAN 49022

ATTN: PARTS REPLACEMENT

Phone (Replacement parts only): 616 982-3571

THIS FORM IS FOR U.S. CUSTOMERS ONLY OVERSEAS CUSTOMERS SEE YOUR DISTRIBUTOR

CUSTOMER SERVICE

REPLACEMENT PARTS

Please provide complete information when you request replacements from either the factory or Heath Electronic Centers. Be certain to include the HEATH part number exactly as it appears in the parts list.

ORDERING FROM THE FACTORY

Print all of the information requested on the parts order form furnished with this product and mail it to Heath. For telephone orders (parts only) dial 616 982-3571. If you are unable to locate an order form, write us a letter or card including:

- Heath part number.
- Model number.
- Date of purchase.
- Location purchased or invoice number.
- Nature of the defect.
- Your payment or authorization for COD shipment of parts not covered by warranty.

Mail letters to:

Heath Company Benton Harbor

MI 49022

Attn: Parts Replacement

Retain original parts until you receive replacements. Parts that should be returned to the factory will be listed on your packing slip.

OBTAINING REPLACEMENTS FROM HEATH ELECTRONIC CENTERS

For your convenience, "over the counter" replacement parts are available from the Heath Electronic Centers listed in your catalog. Be sure to bring in the original part and purchase invoice when you request a warranty replacement from a Heath Electronic Center.

ECHNICAL CONSULTATION

Need help with your kit? — Self-Service? — Construction? — Operation? — Call or write for assistance. you'll find our Technical Consultants eager to help with just about any technical problem except "customizing" for unique applications.

The effectiveness of our consultation service depends on the information you furnish. Be sure to tell us:

- The Model number and Series number from the blue and white label.
- The date of purchase.
- An exact description of the difficulty.
- Everything you have done in attempting to correct the problem.

Also include switch positions, connections to other units, operating procedures, voltage readings, and any other information you think might be helpful.

Please do not send parts for testing, unless this is specifically requested by our Consultants.

Hints: Telephone traffic is lightest at midweek — please be sure your Manual and notes are on hand when you call.

Heathkit Electronic Center facilities are also available for telephone or "walk-in" personal assistance.

REPAIR SERVICE

Service facilities are available, if they are needed, to repair your completed kit. (Kits that have been modified, soldered with paste flux or acid core solder, cannot be accepted for repair.)

If it is convenient, personally deliver your kit to a Heathkit Electronic Center. For warranty parts replacement, supply a copy of the invoice or sales slip.


If you prefer to ship your kit to the factory, attach a letter containing the following information directly to the unit:


- Your name and address.
- Date of purchase and invoice number.
- Copies of all correspondence relevant to the service of the kit.
- A brief description of the difficulty.
- Authorization to return your kit COD for the service and shipping charges. (This will reduce the possibility of delay.)


Check the equipment to see that all screws and parts are secured. (Do not include any wooden cabinets or color television picture tubes, as these are easily damaged in shipment. Do not include the kit Manual.) Place the equipment in a strong carton with at least THREE INCHES of *resilient* packing material (shredded paper, excelsior, etc.) on all sides. Use additional packing material where there are protrusions (control sticks, large knobs, etc.). If the unit weighs over 15 lbs., place this carton in another one with 3/4" of packing material between the two.

Seal the carton with reinforced gummed tape, tie it with a strong cord, and mark it "Fragile" on at least two sides. Remember, the carrier will not accept liability for shipping damage if the unit is insufficiently packed. Ship by prepaid express, United Parcel Service, or insured Parcel Post to:

Heath Company Service Department Benton Harbor, Michigan 49022

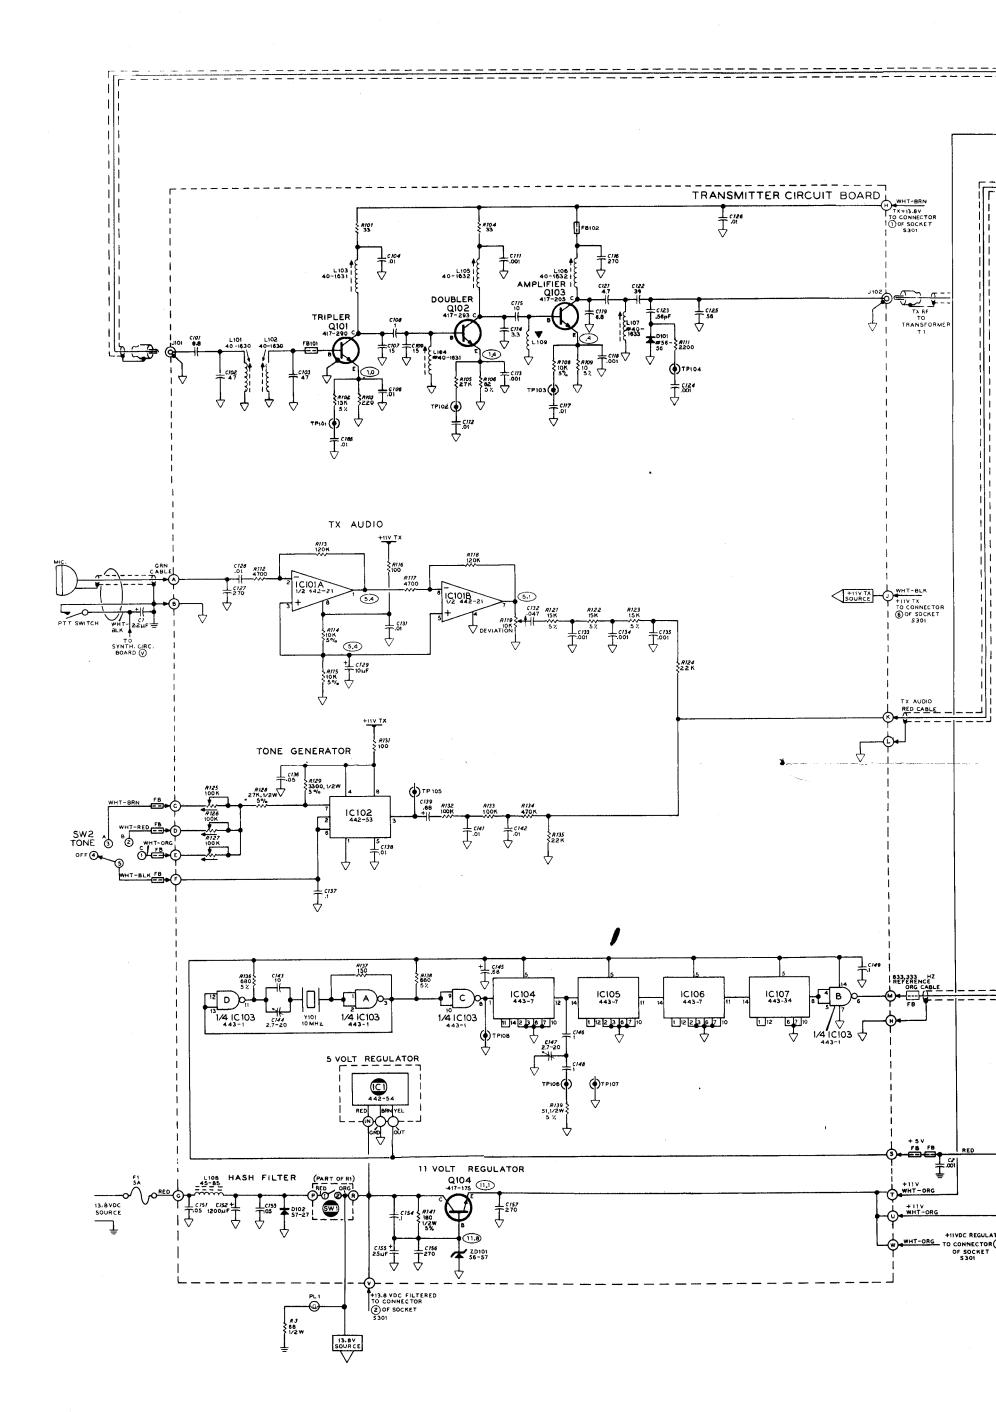

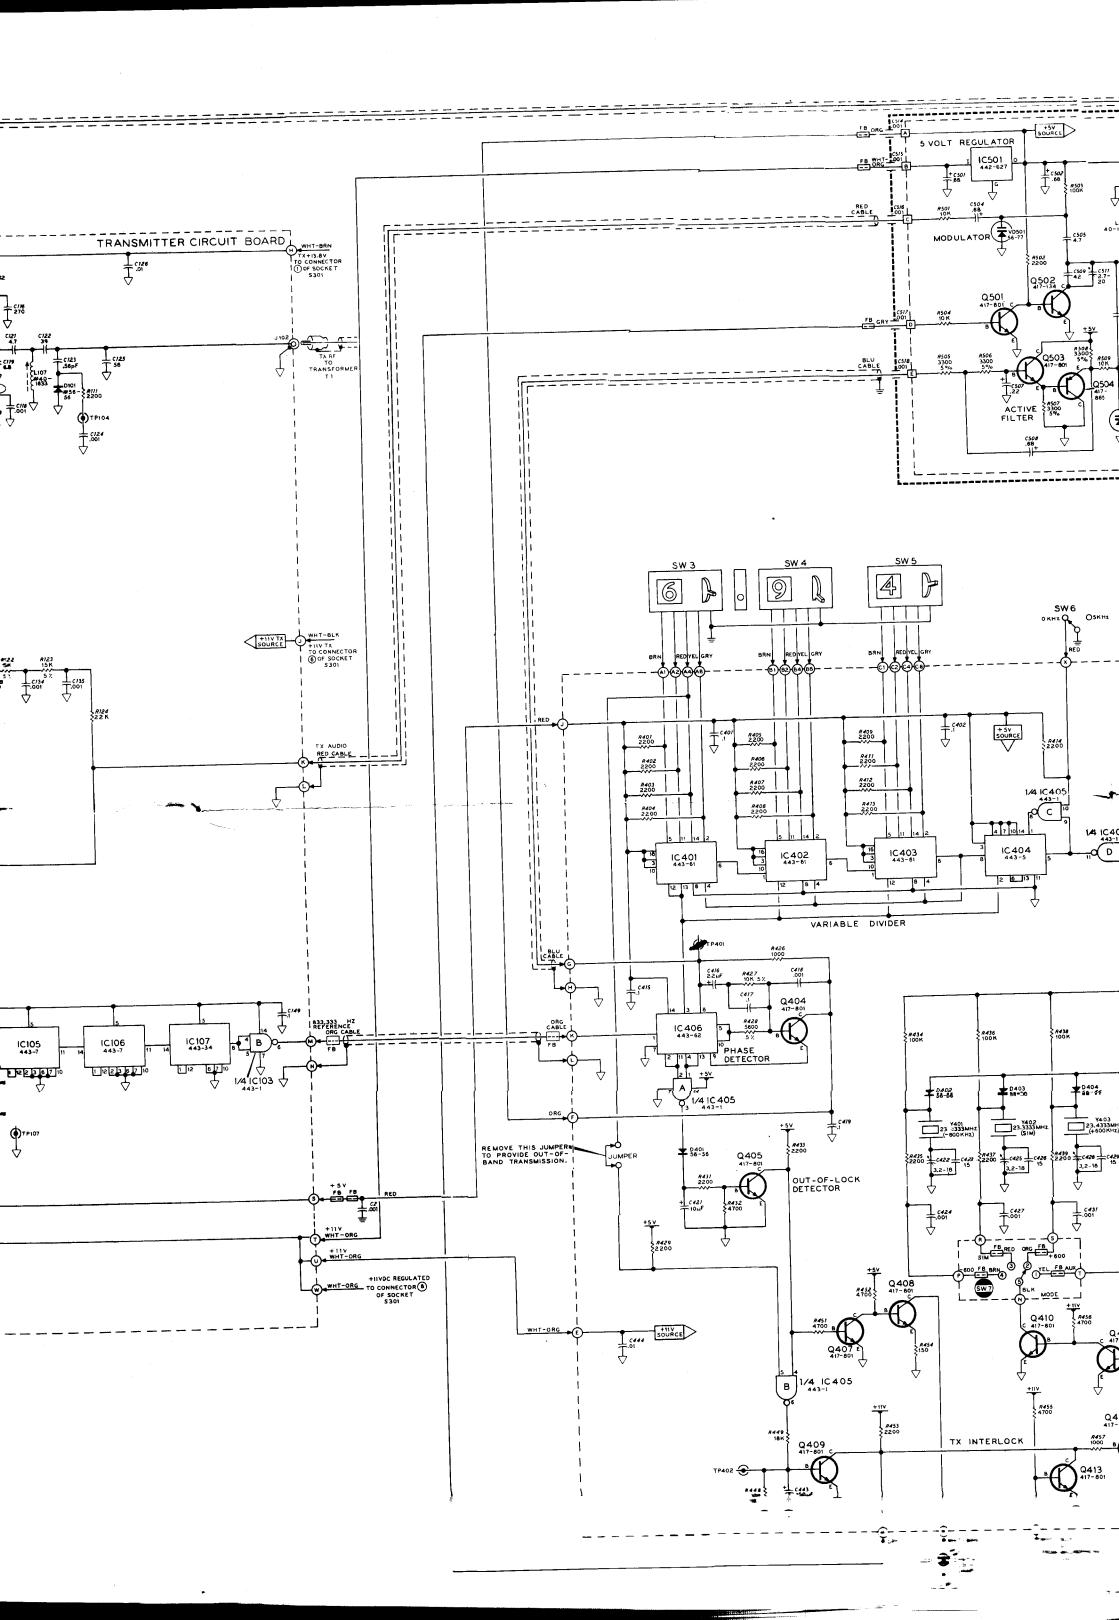

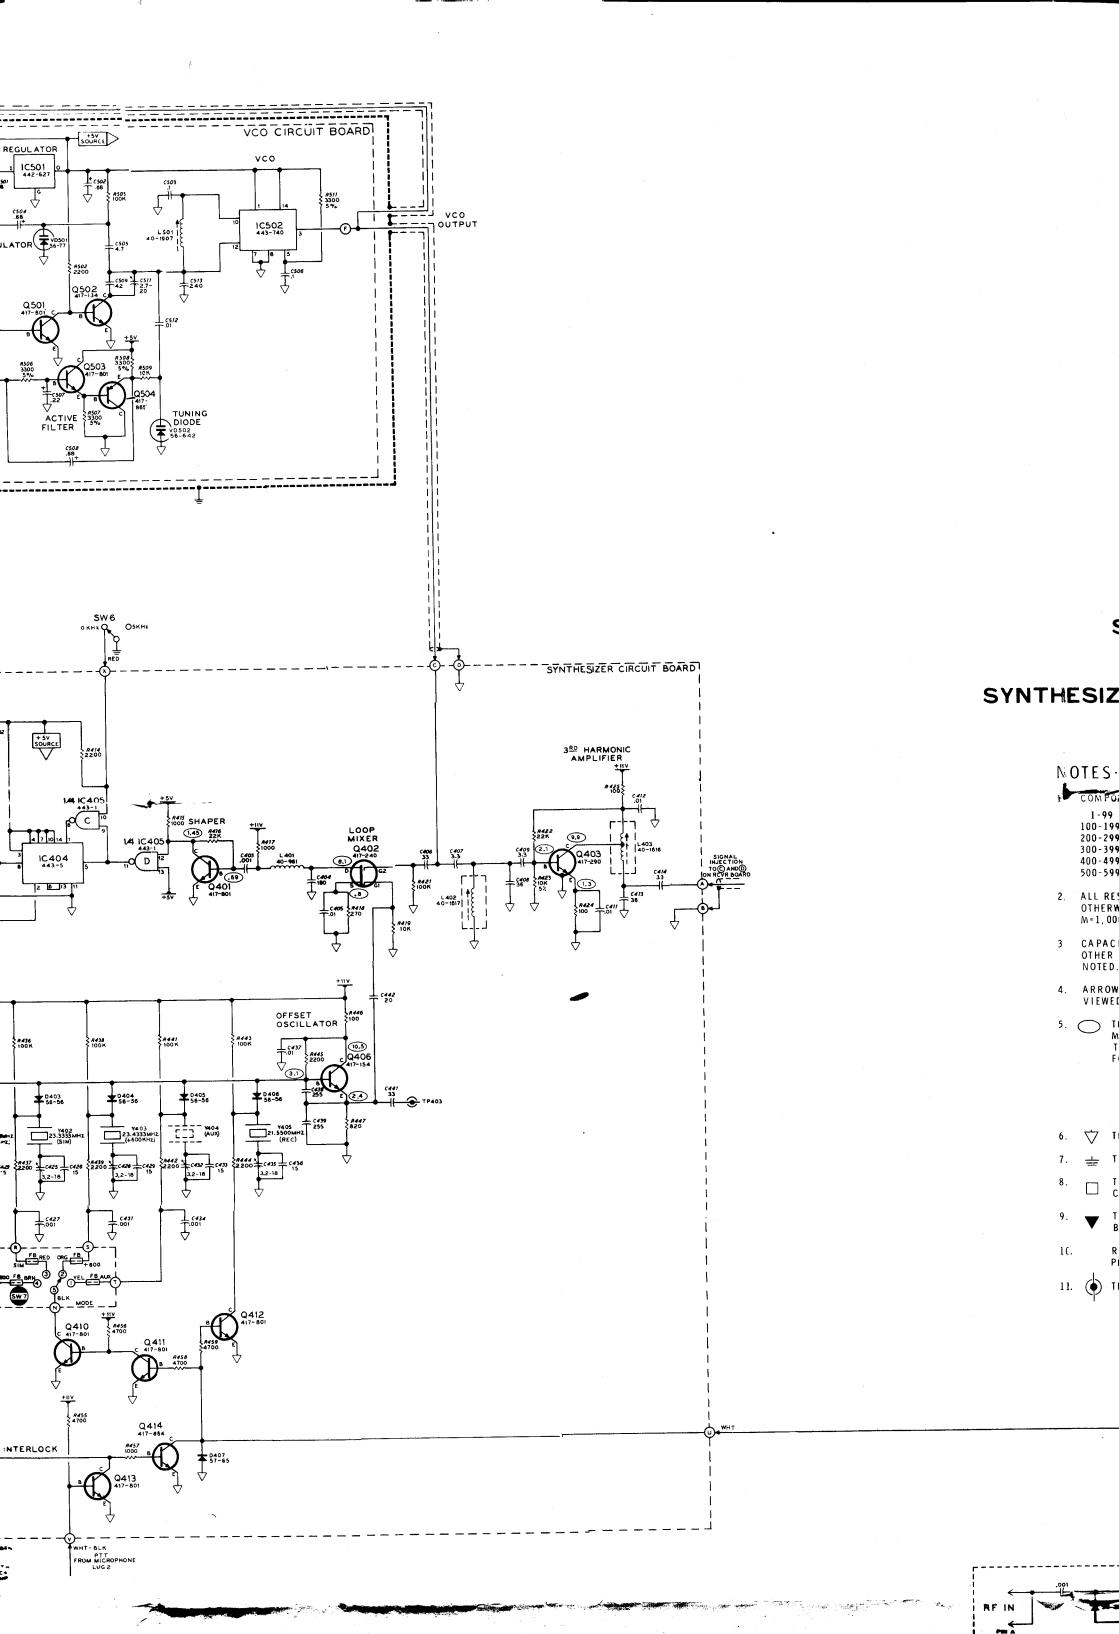

SCHEMATIC OF THE HEATHKIT® SYNTHESIZED 2-METER FM TRANSCEIVER MODEL HW-2036


NOTES


Part of 595-1939-03


1-99 PARTS MOUNTED ON THE CHASSIS.
100-199 PARTS MOUNTED ON THE TRANSMITTER CIRCUIT BOARD.
200-299 PARTS MOUNTED ON THE RECEIVER CIRCUIT BOARD.
300-399 PARTS MOUNTED ON THE POWER AMPLIFIER CIRCUIT BOARD.
400-499 PARTS MOUNTED ON THE SYNTHESIZER CIRCUIT BOARD.
500-599 PARTS MOUNTED ON THE VCO CIRCUIT BOARD.


 ALL RESISTORS ARE 1/4-WATT, 10% TOLERANCE, UNLESS OTHERWISE NOTED. RESISTOR VALUES ARE IN OHMS: k=1000, M=1,000,000.


- CAPACITORS LESS THAN 1 ARE IN µF (MICROFARADS). ALL OTHER CAPACITORS ARE IN pF (PICOFARADS) UNLESS OTHERWISE NOTED.
- ARROWS AT CONTROLS INDICATE CLOCKWISE ROTATION AS VIEWED FROM THE SHAFT END OF THE CONTROL.
- 5. THIS SYMBOL INDICATES A POSITIVE DC VOLTAGE MEASURED WITH A HIGH IMPEDANCE VOLTMETER FROM THE POINT INDICATED TO CHASSIS GROUND UNDER THE FOLLOWING CONDITIONS:
 - 1. NO SIGNAL INPUT.
 - 2. RECEIVER SQUELCHED AT THRESHOLD.
 - 3. VOLUME CONTROL FULLY COUNTERCLOCKWISE.
 4. TRANSMITTER VOLTAGES: KEYED WITHOUT MODULATION.
- 6. THIS SYMBOL INDICATES CIRCUIT BOARD GROUND.
- 7. 🚢 THIS SYMBOL INDICATES CHASSIS GROUND.
- 8.
 THIS SYMBOL INDICATES A SOLDERED CONNECTION TO A CIRCUIT BOARD.
- 9. THIS SYMBOL INDICATES A COIL WOUND BY THE KIT BUILDER.
- 1C. REFER TO THE "CIRCUIT BOARD X-RAY VIEWS" FOR THE PHYSICAL LOCATION OF PARTS.
- 11. THIS SYMBOL INDICATES A TEST POINT.

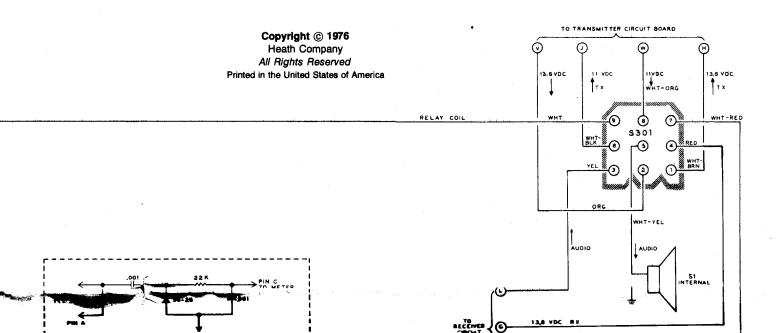

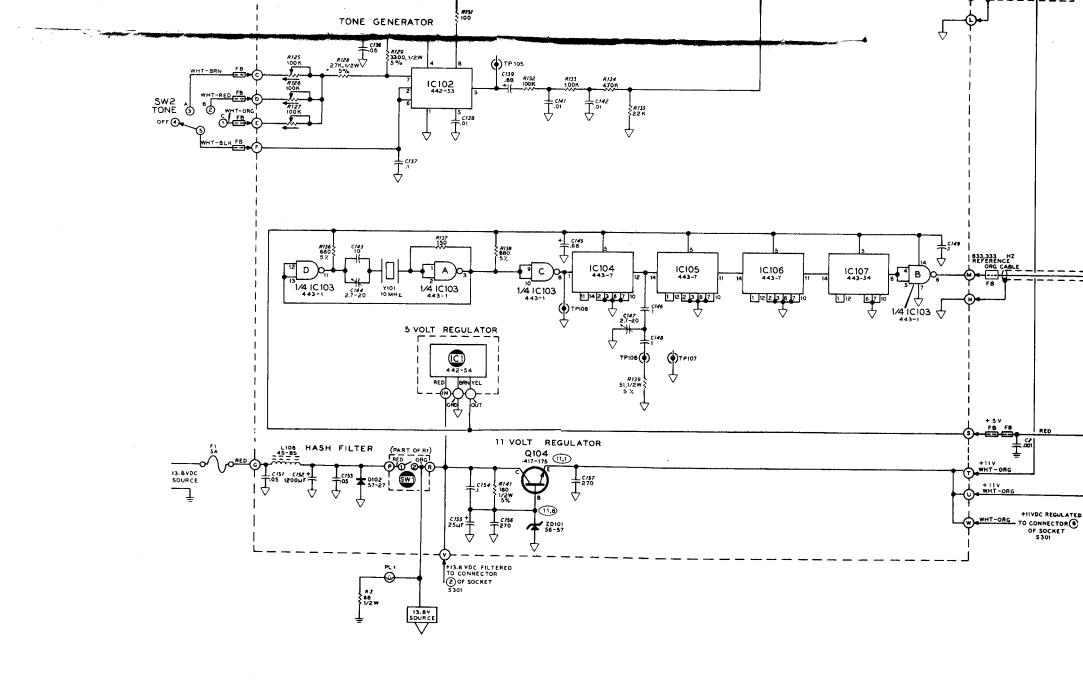

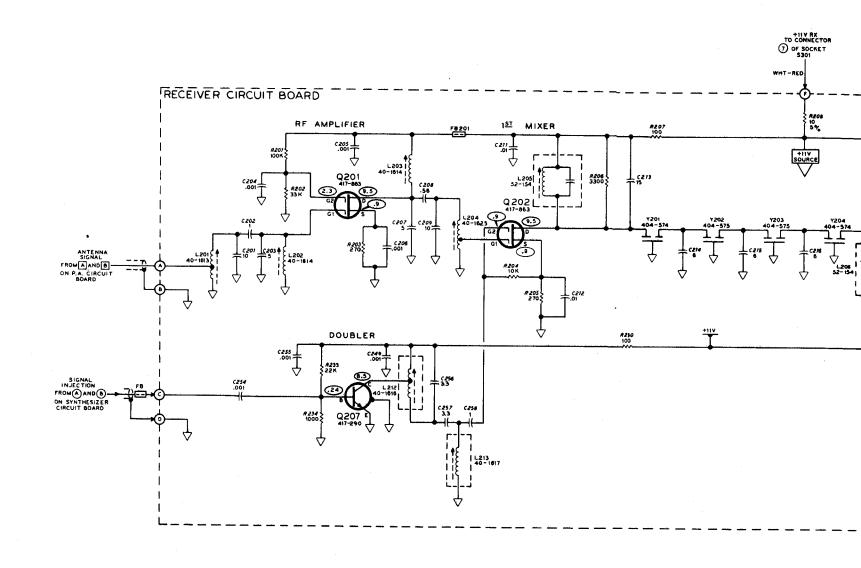

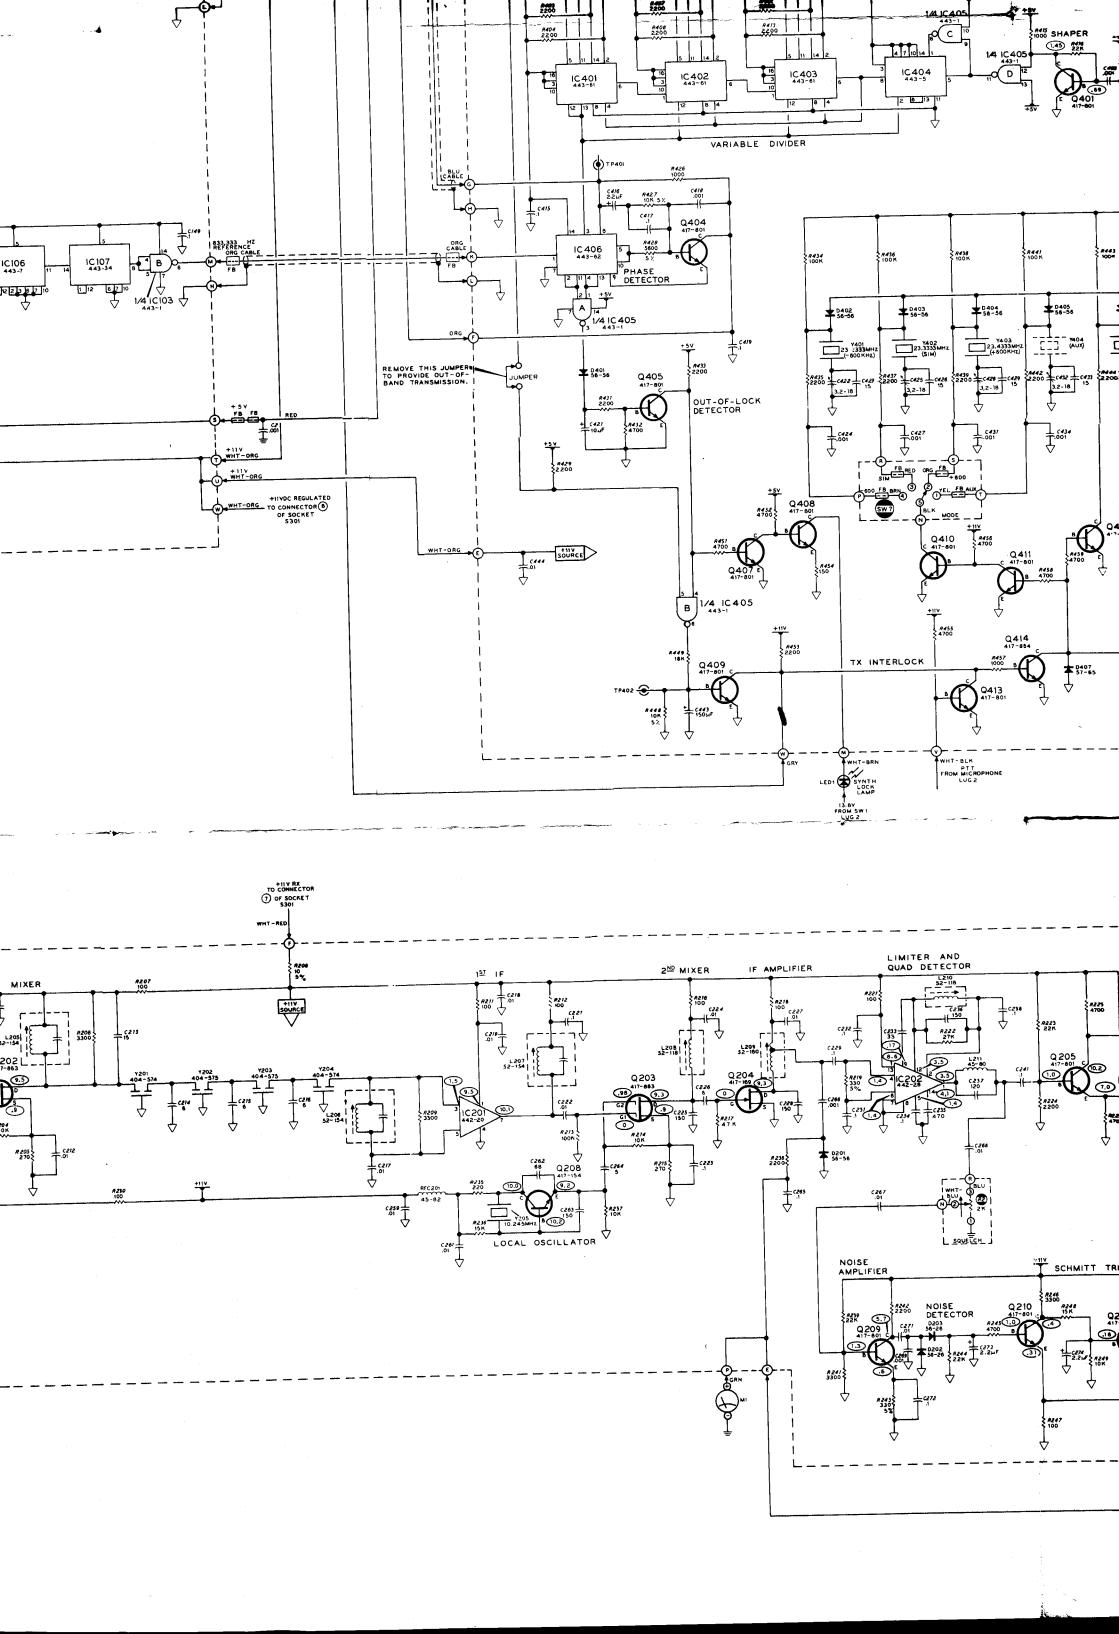

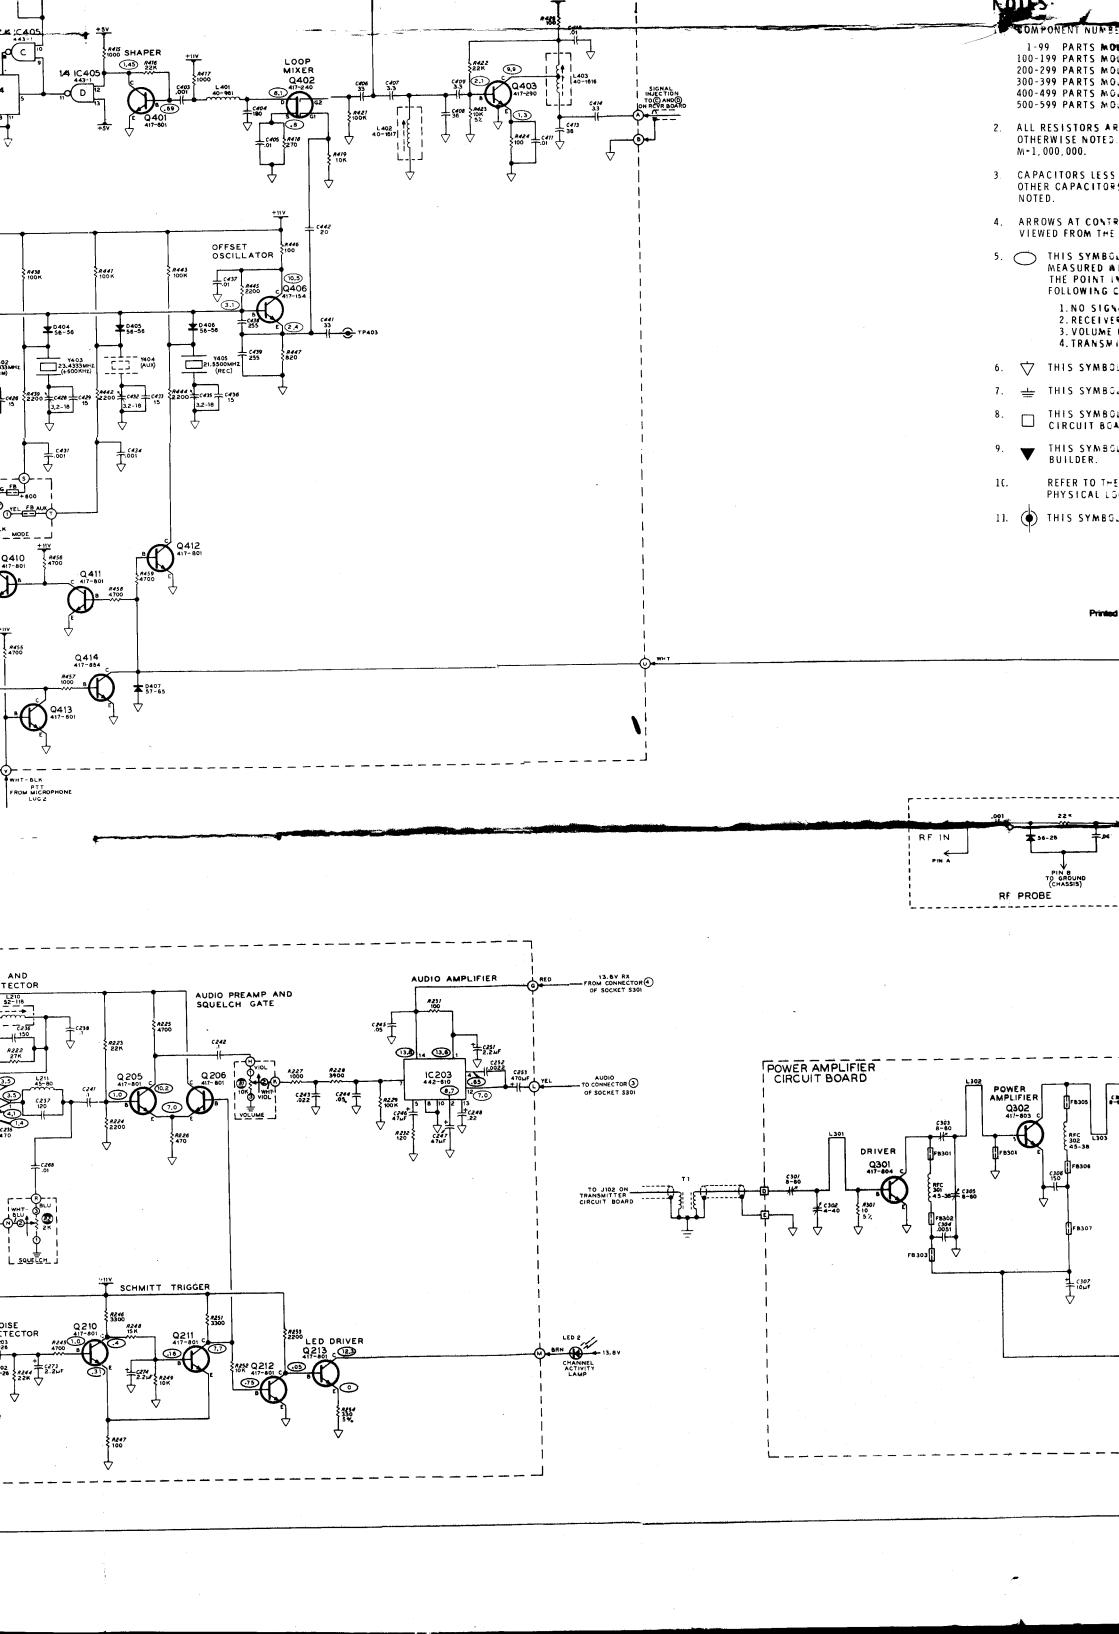



NOTES.


1-99 PARTS MOUNTED ON THE CHASSIS.
100-199 PARTS MOUNTED ON THE TRANSMITTER CIRCUIT BOARD.
200-299 PARTS MOUNTED ON THE RECEIVER CIRCUIT BOARD.
300-399 PARTS MOUNTED ON THE POWER AMPLIFIER CIRCUIT BOARD.
400-499 PARTS MOUNTED ON THE SYNTHESIZER CIRCUIT BOARD.
500-599 PARTS MOUNTED ON THE VCO CIRCUIT BOARD.


- 2. ALL RESISTORS ARE 1/4-WATT, 10% TOLERANCE, UNLESS OTHERWISE NOTED. RESISTOR VALUES ARE IN OHMS: k=1000, M=1,000,000
- 3. CAPACITORS LESS THAN 1 ARE IN µF (MICROFARADS). ALL OTHER CAPACITORS ARE IN pF (PICOFARADS) UNLESS OTHERWISE NOTED.
- ARROWS AT CONTROLS INDICATE CLOCKWISE ROTATION AS VIEWED FROM THE SHAFT END OF THE CONTROL.
- 5. THIS SYMBOL INDICATES A POSITIVE DC VOLTAGE MEASURED WITH A HIGH IMPEDANCE VOLTMETER FROM THE POINT INDICATED TO CHASSIS GROUND UNDER THE FOLLOWING CONDITIONS:
 - 1. NO SIGNAL INPUT.
 - 2. RECEIVER SQUELCHED AT THRESHOLD.
 - 3. VOLUME CONTROL FULLY COUNTERCLOCKWISE.
 - 4. TRANSMITTER VOLTAGES: KEYED WITHOUT MODULATION.
- 6. THIS SYMBOL INDICATES CIRCUIT BOARD GROUND.
- 7. 📥 THIS SYMBOL INDICATES CHASSIS GROUND.
- 8.

 THIS SYMBOL INDICATES A SOLDERED CONNECTION TO A CIRCUIT BOARD.
- 9. THIS SYMBOL INDICATES A COIL WOUND BY THE KIT BUILDER.
- 1C. REFER TO THE "CIRCUIT BOARD X-RAY VIEWS" FOR THE PHYSICAL LOCATION OF PARTS.
- 11. () THIS SYMBOL INDICATES A TEST POINT.

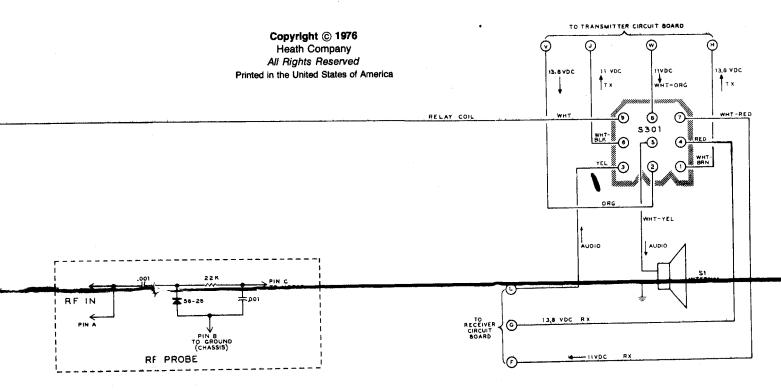

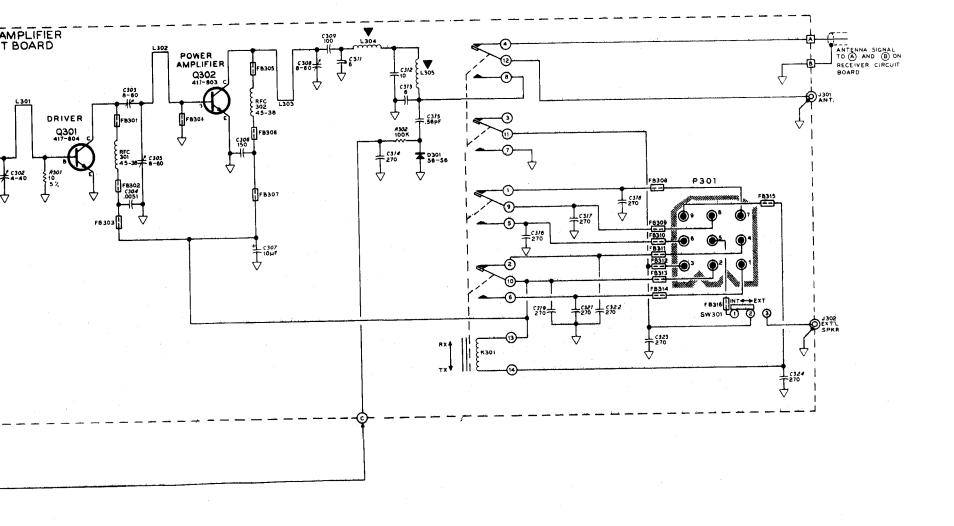

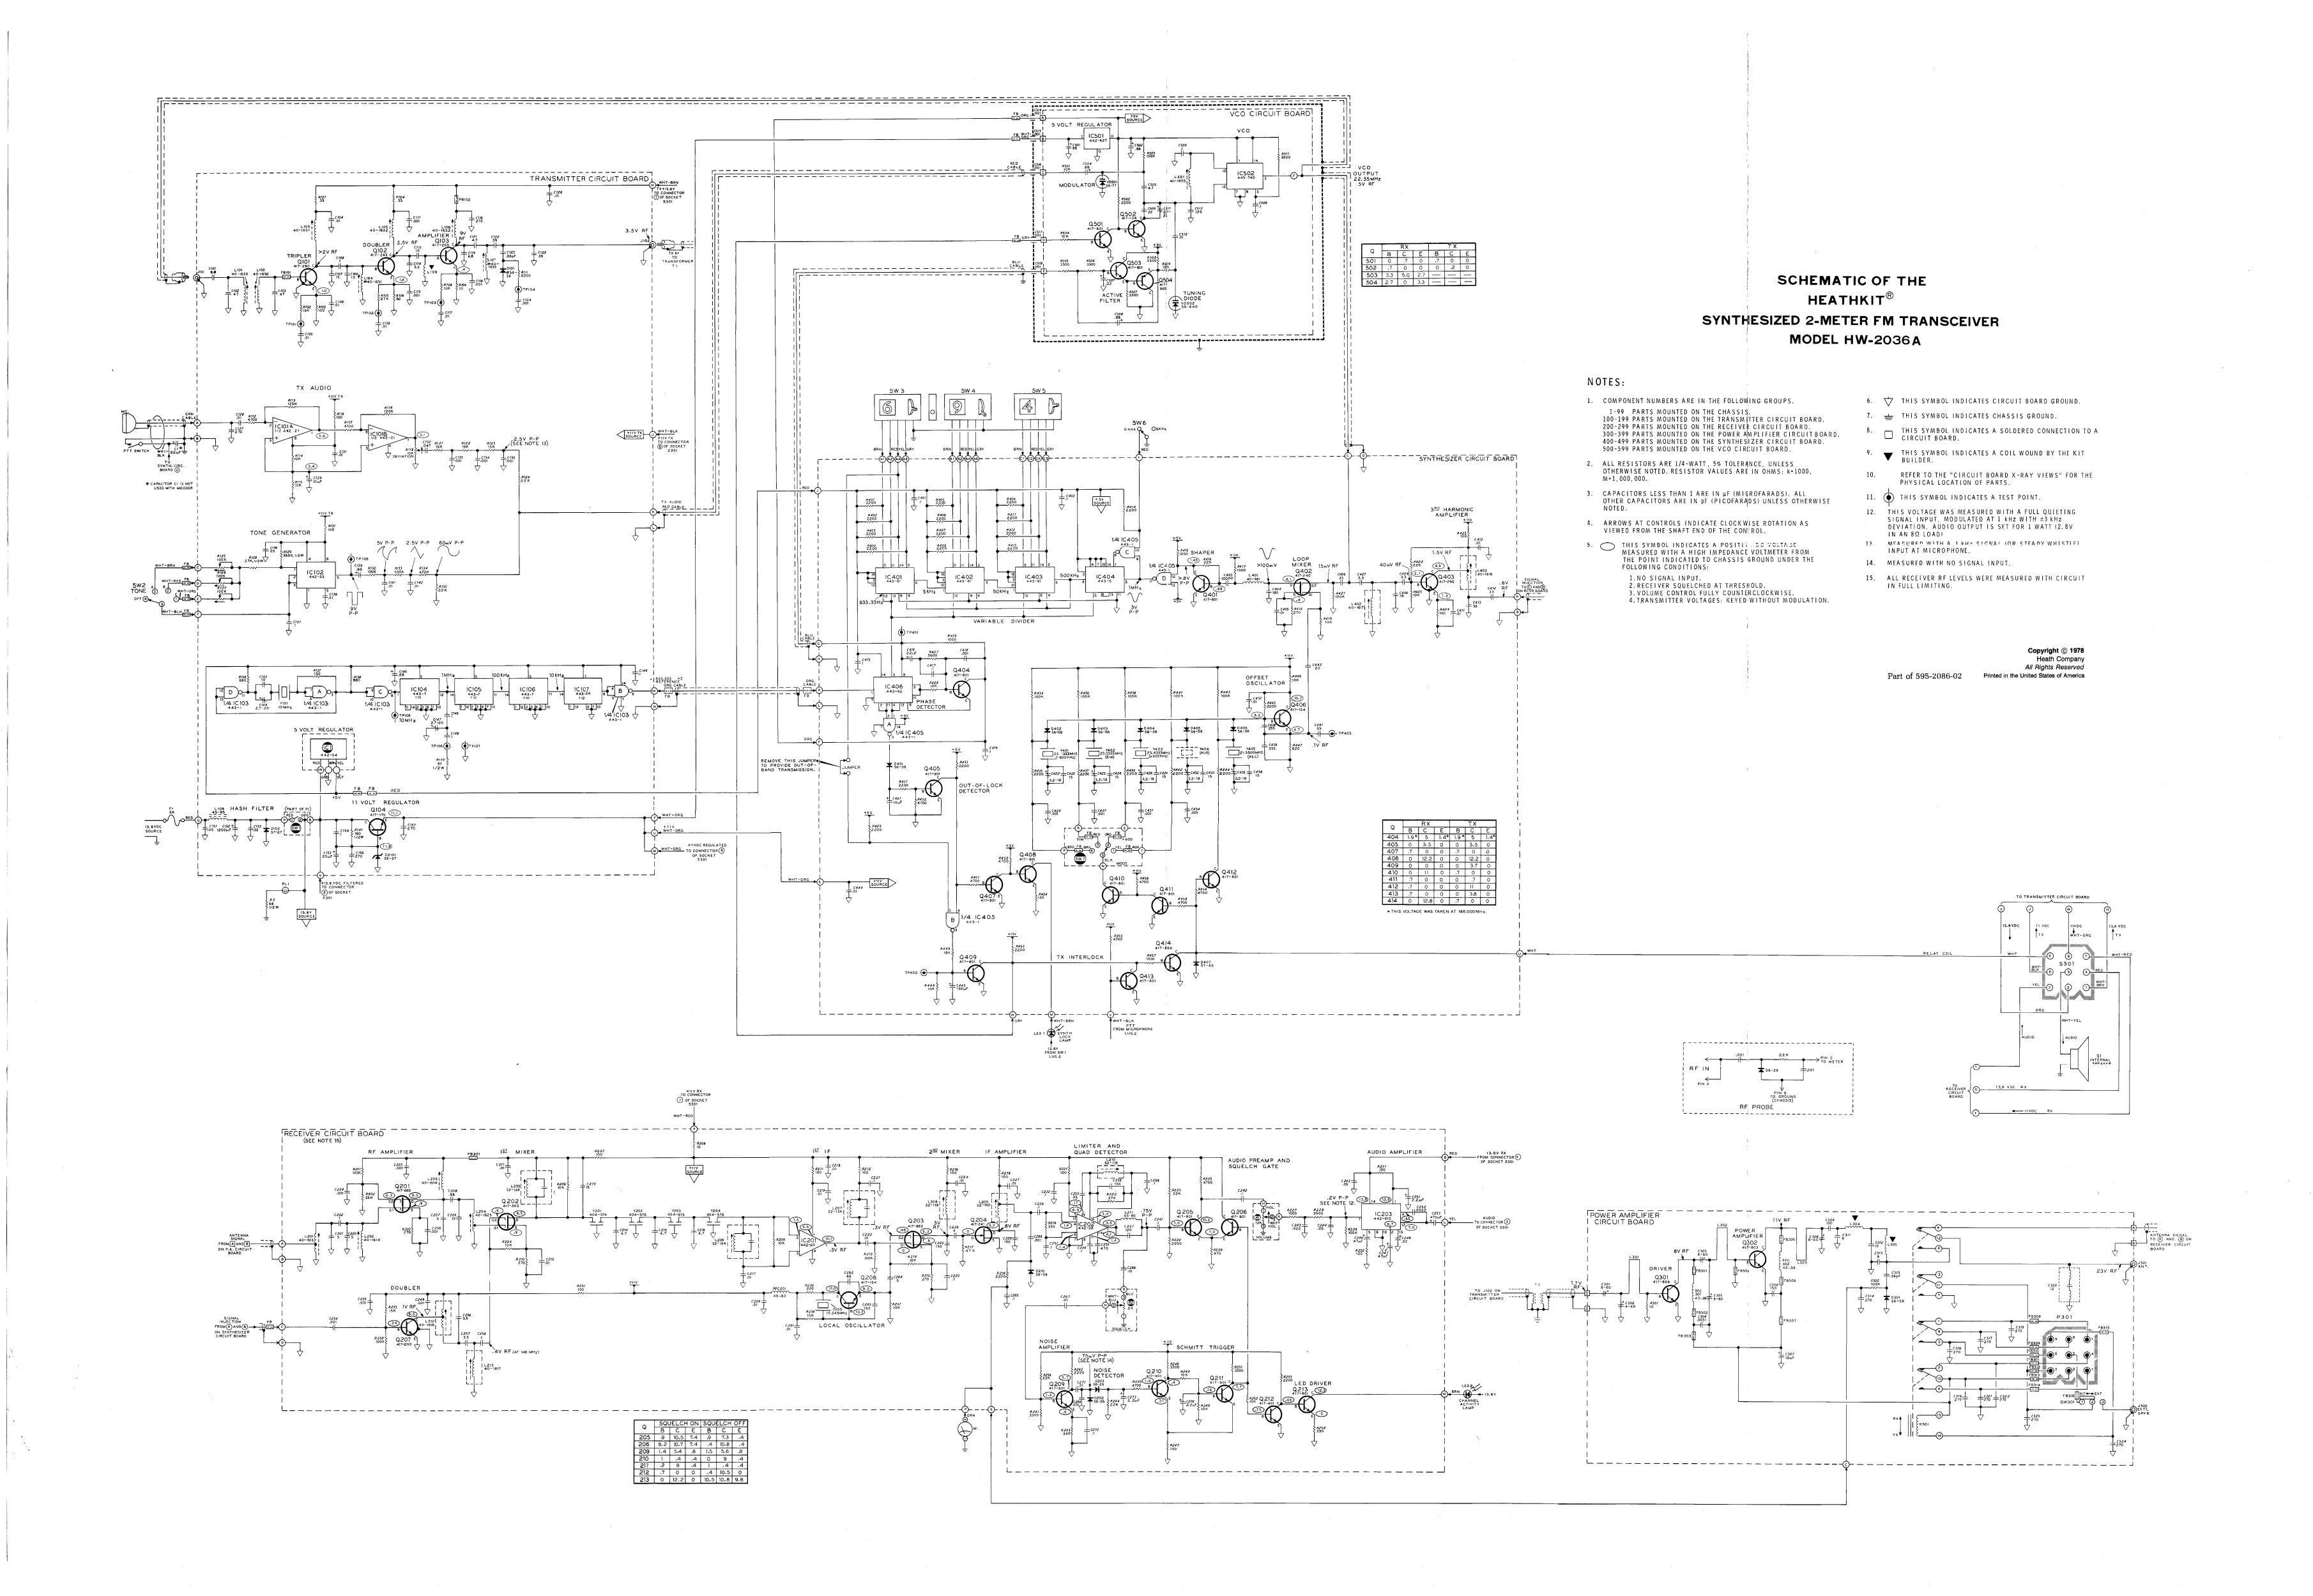

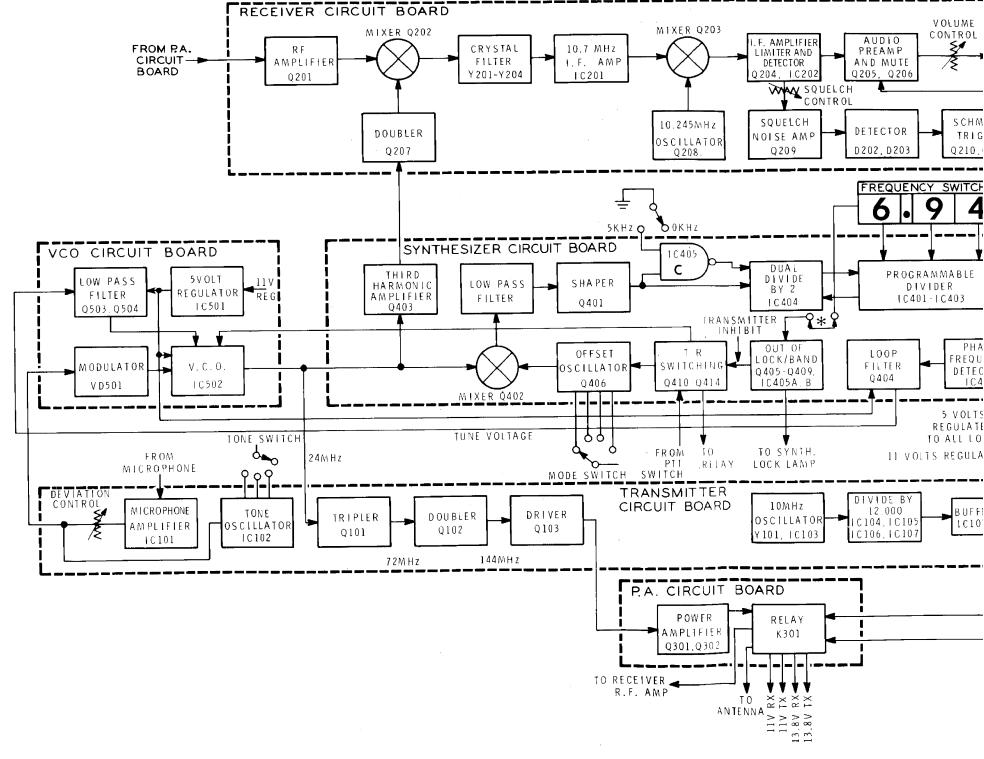

BLOCK DIAGRAM

